From Belgium with love
WEVER & DUCRÉ
LIGHTING

LIFE IS TOO SHORT FOR BORING LIGHTING

WEVER & DUCRÉ

LIGHTING

DESIGNER FAMILIES

INDOOR

ROOMOR
p. 27 — 51

TUBE SUSPENDED p. 29

CABLE SUSPENDED p. 39

OFFICE CABLE SUSPENDED p. 33

OFFICE TUBE SUSPENDED p. 35

OFFICE CEILING SURFACE p. 37

WALL p. 41

TABLE p. 49

FLOOR p. 51

MIRRO
p. 53 — 67

CEILING p. 55

SUSPENDED p. 57

WALL p. 59

WALL p. 59

TABLE p. 65

FLOOR p. 67

DRO
p. 69 — 83

CEILING p. 69

SUSPENDED p. 71

WALL p. 75

WALL p. 75

FLOOR p. 79

TABLE p. 81

FLOOR p. 83

FLOOR p. 83

ROCK
p. 85 — 87

SUSPENDED p. 85

FLOOR p. 87

NAKED p. 87

WIRO
p. 89 — 123

CEILING p. 91

DIAMOND p. 101

INDUSTRY p. 109

GLOBE p. 111

CONE p. 115

WALL p. 119

TABLE p. 121

FLOOR p. 123

J.J.W.
p. 125 — 137

WALL p. 127

CEILING p. 133

SUSPENDED p. 135

SUSPENDED p. 137

REVER
p. 139 — 159

SUSPENDED p. 143

WALL p. 145

TABLE p. 149

TABLE p. 153

FLOOR p. 159

CEILING RECESSED
p. 161 — 257

DEEP BIJOU p. 165

DEEP PETIT p. 167

DEEP p. 169

DEEP ADJUST PETIT p. 173

DEEP ADJUST p. 175

DEEP ADJUST p. 177

DEEP ADJUST TRIMLESS p. 179

DEEP ASYM ADJUST p. 181

DEEP ADJUST FORT p. 183

DEEPER p. 171

DEEP BIJOU IP65 p. 235

DEEP IP44 | IP65 p. 237

DEEPER IP44 p. 239

RONY p. 187

RON p. 197

RINI IP44 p. 245

RINI SNEAK IP44 p. 249

RUVI p. 217

CENO 1.0 p. 219

PIRRO p. 189

PLANO PETIT p. 201

PLANO p. 203

PLANO IP44 p. 253

PLANO ADJUST FORT p. 205

STRANGE PETIT p. 207

STRANGE p. 209

LUNA ROUND IP44 p. 247

LUNA SQUARE IP44 p. 251

TAIO ROUND IP65 p. 243

SNEAK TRIM p. 211

SNEAK TRIMLESS p. 213

CITY IP44 p. 257

MIRBI IP44 1.0 p. 255

MIRBI IP44 2.0 p. 255

BLIEK ROUND PETIT p. 223

BLIEK ROUND p. 225

SPYDER p. 227

BLIEK SQUARE p. 231

SPINEO p. 185

NOP PETIT p. 193

NOP p. 195

CEILING SURFACE
p. 259 — 337

MIRRO p. 55

ROOMOR OFFICE p. 37

DRO p. 69

WIRO p. 91

J.J.W. p. 133

VENN p. 327

PIRRO p. 289

PIRRO OPAL p. 293

SOLID PETIT p. 295

SOLID p. 299

SIRRA p. 303

SIRRO p. 305

RAY MINI p. 261

BOX MINI p. 269

DOCUS MINI p. 277

HEXO MINI p. 283

RAY p. 263

BOX p. 271

DOCUS p. 279

MORE ON THE NEXT PAGE

HEXO p. 285

TAIO ROUND p. 335

ROB IP44 p. 329

ROBY IP44 p. 331

TOWNA IP44 p. 333

CLEA p. 323

CLOCK p. 325

MIRBI IP44 p. 337

SARA p. 309

SQUBE p. 311

CENO p. 317

MICK p. 319

TRACKS STREX p. 343 — 375

48V TRACKS p. 343

CENO p. 349

MICK p. 353

RAY MINI p. 357

BOX MINI p. 359

DOCUS MINI p. 361

HEXO MINI p. 363

DOTS LIGHT MODULE p. 365

OPAL LIGHT MODULE p. 365

ODREY p. 367

STUBE p. 371

SOLLI p. 373

TRACKS 1-PHASE p. 377 — 387

1-PHASE TRACKS p. 377

SARA p. 379

SQUBE p. 381

DRO p. 383

ODREY p. 385

RAY p. 387

HEXO p. 387

TRACKS 3-PHASE p. 389 — 413


3-PHASE TRACKS p. 389

SQUBE p. 391

CENO FORT p. 397

RAY p. 399

HEXO p. 399

ELLO SYSTEM p. 401

PIRRO SYSTEM p. 409

ILANE p. 411

CEILING SUSPENDED p. 415— 499

ROOMOR TUBE p. 29

ROOMOR p. 39

ROOMOR OFFICE p. 33

ROOMOR OFFICE TUBE p. 35

MIRRO p. 57

DRO p. 71

ROCK p. 85

WIRO p. 93

DIAMOND p. 101

INDUSTRY p. 109

GLOBE p. 111

CONE p. 115

J.J.W. p. 135

REVER p. 143

ODREY p. 419

RAY p. 425

BOX p. 427

DOCUS p. 429

HEXO p. 431

SHIEK 2.0 p. 435

SHIEK 3.0 p. 437

SHIEK 4.0 p. 439

WETRO p. 443

SELO p. 451

DINOR 1.0 p. 453

DINOR 2.0 p. 453

DINOR 3.0 p. 453

CORK p. 457

CONE p. 459

BISHOP p. 461

ELLO p. 465

DARF p. 467

VENN p. 471

GIGANT p. 473

CYCLONE p. 477

ODREY MULTI p. 485

RAY MULTI p. 487

BOX MULTI p. 489

DOCUS MULTI p. 491

HEXO MULTI p. 493

WETRO MULTI p. 495

SHIEK MULTI p. 497

WALL RECESSED p. 501 — 513

SMILE IN p. 503

LITO p. 505

STRIPE p. 507

STRANGE p. 509

THEMIS p. 511

ORIS p. 513

WALL SURFACE p. 515 — 587

ROOMOR p. 41

MIRRO p. 59

DRO p. 75

WIRO p. 119

J.J.W. p. 127

REVER p. 145

ODREY p. 519

RAY MINI p. 525

RAY p. 527

BOX MINI p. 533

BOX p. 535

DOCUS MINI p. 541

HEXO MINI p. 543

TRAIN p. 545

CENTRAL p. 547

STATION p. 549

SARA SNOOZE p. 551

MICK SNOOZE p. 555

MICK WALL p. 557

LEENS p. 559

BENTO p. 561

SCAVA p. 563

CLEA p. 569

CLOCK p. 571

MILES p. 573

MILES p. 575

MILES p. 577

VENN p. 579

FINLIN p. 565

DARF p. 583

MIRBA IP44 p. 585

MIRBI LONG IP44 p. 587

INDOOR

TABLE

ROOMOR
p. 49

MIRRO
p. 65

DRO
p. 79

DRO
p. 81

WIRO
p. 121

REVER
p. 149

REVER
p. 153

FLOOR SURFACE

ROOMOR
p. 51

MIRRO
p. 67

DRO
p. 83

DRO
p. 83

ROCK
p. 87

ROCK NAKED
p. 87

WIRO
p. 123

REVER
p. 159

OUTDOOR

CEILING RECESSED

p. 591 — 597

INTRA
p. 595

DEEP BIJOU
p. 593

DEEP
p. 593

TAIO ROUND
p. 597

CEILING SURFACE

p. 599 — 617

BLAS
p. 617

BLAS
p. 617

BOX
p. 611

RAY
p. 607

TUBE
p. 605

TAIO ROUND
p. 601

TUBE CARRÉ
p. 609

TRAM ROUND
p. 603

TRAM CARRÉ
p. 603

ROB
p. 615

WALL RECESSED

p. 619 — 623

SMILE IN
p. 621

SMILE IN
p. 621

ORIS
p. 623

ORIS
p. 623

WALL SURFACE

p. 625 — 667

SMILE ON
p. 659

SMILE ON
p. 659

TAPE
p. 661

TUBE
p. 629

TUBE CARRÉ
p. 637

TUBE CARRÉ
p. 639

GETTON
p. 665

CENTRAL
p. 651

STATION
p. 653

TRAIN
p. 647

BOX
p. 641

BOXX
p. 655

RAY
p. 633

TAIO ROUND
p. 635

TRAM
p. 627

PALOS
p. 667

SWAM
p. 663

X-BEAM
p. 657

FLOOR RECESSED

p. 669 — 679

CARD
p. 671

MAP
p. 673

MAP ASYM
p. 675

CHART
p. 677

CHART ASYM
p. 679

FLOOR SURFACE

p. 681 — 713

STIPO
p. 683

STAKE
p. 685

STAKE FOLD
p. 685

X-BEAM
p. 687

SWAM
p. 689

GETTON
p. 691

TAPE
p. 693

PACE
p. 695

FIFTY FIFTY
p. 697

SWAY
p. 699

PALOS ROUND
p. 701

PALOS CARRÉ
p. 703

LINUS
p. 705

PALLUZ C
p. 707

COSTA
p. 709

COSTA
p. 711

I'LL TAKE THE BIKE

HOMETOWN GLORY KORTRIJK

Fancy some fresh fries? Grab your bike and pedal on down to Kortrijk. You can rent one on pretty much every corner in 2020's Best Bike City. Get from A to B incredibly quickly and without hurting the environment. We think it's great – and can't imagine a better place for sustainable ideas. Our lights are so much more than just an amazing design – their inner values count, too. We make sure every item limits resource use and avoids disposable packaging. Who inspires us? People like you. People who care about a clean environment as much as they care about elegant design. People who see plastic as yesterday's news.

Lust auf frische Pommes? Dann schwingen Sie sich in Kortrijk am besten aufs Rad. Das kann man in der „Best Bike City 2020" nämlich fast an jeder Straßenecke mieten. Und sich so schnell und umweltschonend von A nach B bewegen. Tolle Sache, finden wir und können uns keinen Ort vorstellen, an dem sich nachhaltige Ideen besser umsetzen ließen. Schließlich sollen unsere Leuchten nicht nur mit außergewöhnlichem Design, sondern auch mit inneren Werten punkten. Also achten wir bei jedem Stück darauf, dass Ressourcen geschont und Einwegverpackungen vermieden werden. Von wem wir uns dabei inspirieren lassen? Von Menschen wie Ihnen, die auf edles Design ebenso viel Wert legen, wie auf eine saubere Umwelt. Und für die Plastik echt von gestern ist.

GRAB YOUR BIKE AND COME OVER

SADDLE UP

We love Kortrijk's lively creative scene, cosy cafés, and fantastic design events. You wouldn't know that a world-famous western hero was born here. Cartoonist Morris (Maurice De Bevere) created the legendary "Lucky Luke" who is still so strongly associated with the city today. Where can you meet him? In front of our new warehouse, perhaps. It's run – faithfully – by the four Daltons. But don't worry, Joe, Jack, William, and Averell aren't up to no good. The four wind turbines keep our environment clean and our vests white. Sounds good? Then get on your saddle. It's an easy bike ride to the showroom and warehouse. Yee-haw!

Kortrijk lieben wir vor allem wegen seiner lebendigen Kreativszene, den netten Cafés und den tollen Design-Events. Aber hätten Sie gewusst, dass auch einer der beliebtesten Westernhelden hier seine ersten Runden drehte? Und zwar im Kopf des Zeichners Morris (Maurice De Bevere), dessen legendärer „Lucky Luke" auch heute noch eng mit der Stadt verbunden ist. Wo man ihm begegnet? Zum Beispiel vor unserem neuen Warehouse, das – ganz stilecht – von den vier Daltons betrieben wird. Aber keine Sorge, bei uns führen Joe, Jack, William und Averell nur Gutes im Schilde. Denn die vier Windräder sorgen dafür, dass unsere Umwelt sauber und unsere Westen weiß bleiben. Klingt toll? Dann nichts wie rauf in den Sattel. Showroom und Warehouse sind auch mit dem Rad ganz easy erreichbar. Yee-haw!

SHOWROOM

WEVER & DUCRÉ
Spinnerijstraat 99/21
8500 Kortrijk
Belgium
+32 56 49 28 00

OPERATIONAL SITE

WEVER & DUCRÉ
Evolis 118
8530 Harelbeke
Belgium

EXPLORE KORTRIJK
weverducre.com/kortrijk

OUR BEST SHOWROOM? YOUR APARTEMENT

HOME IS WHERE MY LUMINAIRE IS

The wonderful thing about Wever & Ducré lights? They are at home in 60 countries worldwide. They feel just as comfortable in a London rooftop bar as in a small Berlin city apartment. The secret to their success? Exceptional design and top-quality materials make each light a personal favourite. Sounds perfect? Then you will be delighted to know that our products are delivered super-fast, and without any plastic packaging at all for the last four years. Right down to the smallest screw. Select a showroom on the right. Our new collection is waiting for you.

Das Tolle an Wever & Ducré-Leuchten? Sie sind in 60 Ländern der Welt zuhause. Und fühlen sich in der Londoner Rooftop-Bar genauso wohl, wie im kleinen Berliner City-Apartment. Ihr Erfolgsgeheimnis? Außergewöhnliches Design und hochwertige Materialien, die jede Leuchte zum ganz persönlichen Lieblings-stück machen. Klingt perfekt? Dann wird es Sie freuen, dass unsere Produkte nicht nur superschnell, sondern seit vier Jahren auch ganz ohne Plastikverpackung geliefert werden. Und das bis zur kleinsten Schraube. Also gleich einen Blick nach rechts werfen und sich einen der verschiedenen Showrooms aussuchen. Unsere neue Kollektion wartet schon auf Sie.

WEVER & DUCRÉ COLOGNE
SHOWROOM
Schanzenstraße 36, Geb. 234B
51063 Cologne
+49 221 130 649 60
Germany

WEVER & DUCRÉ LONDON
SHOWROOM
23 Batemans Row
EC2A 3HH London
+44 203 174 01 77
United Kingdom

WEVER & DUCRÉ STOCKHOLM
SHOWROOM
Hårdvallsgatan 18
115 46 Stockholm
+46 73 045 76 39
Sweden

WEVER & DUCRÉ HONG KONG
SHOWROOM
RM. 1413, Block A, Sea View Estate
2 Watson Road North Point, Hong Kong
+852 211 069 24
Hong Kong

WEVER & DUCRÉ WARSAW
SHOWROOM
Diamond Business Park, Posag 7 Panien
Street no 1, 02-495 Warsaw
+48 730 330 337
Poland



WEVER & DUCRÉ OSLO
REPRESENTATIVE OFFICE
Drammensveien 288
0283 Oslo
+47 24 07 61 11
Norway



WEVER & DUCRÉ DUBAI
REPRESENTATIVE OFFICE
Office No. 704, HDS Business Center, Cluster M,
Jumeirah Lakes Towers, DMCC, PO Box 336603 Dubai
+971 4 436 23 47
United Arab Emirates

WEVER & DUCRÉ GRAZ
SHOWROOM
Gleisdorfer Gasse 15
8010 Graz
+43 316 317 085 91
Austria

WEVER & DUCRÉ VENICE
SHOWROOM
Via Monte Popera 4/2
30027 San Donà di Piave - Venezia
+39 0421 177 83 88
Italy



WEVER & DUCRÉ LYON
SHOWROOM
36, Rue Juliette Récamier
69006 Lyon
+33 4 72 811 199
France



WEVER & DUCRÉ PARIS
SHOWROOM
10, Rue Pecquay
75004 Paris
+33 1 402 981 01
France



WEVER & DUCRÉ LUCERNE
REPRESENTATIVE OFFICE
Kellerstraße 22
6005 Lucerne
+41 41 361 60 60
Switzerland

WEVER & DUCRÉ HELSINKI
REPRESENTATIVE OFFICE
Kaikukatu 4B
00530 Helsinki
+358 400 700 975
Finland

WEVER & DUCRÉ BARCELONA
REPRESENTATIVE OFFICE
Plaça del Duc de Medinaceli, 5
08002 Barcelona
+34 935 951 780
Spain

HELLO AGAIN

WE'RE GETTING CLOSER

There are people you just can't get out of your head. Artist Egija Zirapa springs to mind. Her work didn't get the attention it deserved last year because of the pandemic. We asked her to further develop the collage she designed for us in 2020. To really bring the theme of togetherness back to the fore. "Great idea," she said. She was immediately on board. What inspires Egija? With a smile, she confesses that she can't wait to start cutting up photographs and magazines. "I just can't be stopped when I stumble upon an interesting photo." A passion that's very familiar to us. Our designers, architects, and artists can't be stopped either. They harness a ton of creativity and enthusiasm when they develop something completely new.

Es gibt Menschen, die gehen einem einfach nicht mehr aus dem Kopf. Wie die Künstlerin Egija Zirapa, deren Arbeit im vergangenen Jahr aufgrund der weltweiten Ausnahmesituation leider nicht genug gesehen wurde. Also haben wir sie gebeten, ihre 2020 entworfene Collage für uns weiterzuentwickeln. Und das Thema „Togetherness" noch einmal groß aufs Cover zu holen. „Tolle Idee", meinte sie. Und hat sofort begeistert zugesagt. Wovon sich Egija inspirieren lässt? Vor allem von Fotografien und Magazinen, die sie am liebsten sofort zerschneiden würde, wie sie uns lachend gesteht. „Wenn ich ein interessantes Foto entdecke, bin ich eben nicht zu bremsen". Eine Leidenschaft, die uns bekannt vorkommt. Schließlich lassen sich auch unsere Designer, Architekten und Künstler nicht aufhalten. Und arbeiten mit viel Kreativität und Begeisterung daran, etwas völlig Neues zu entwickeln.

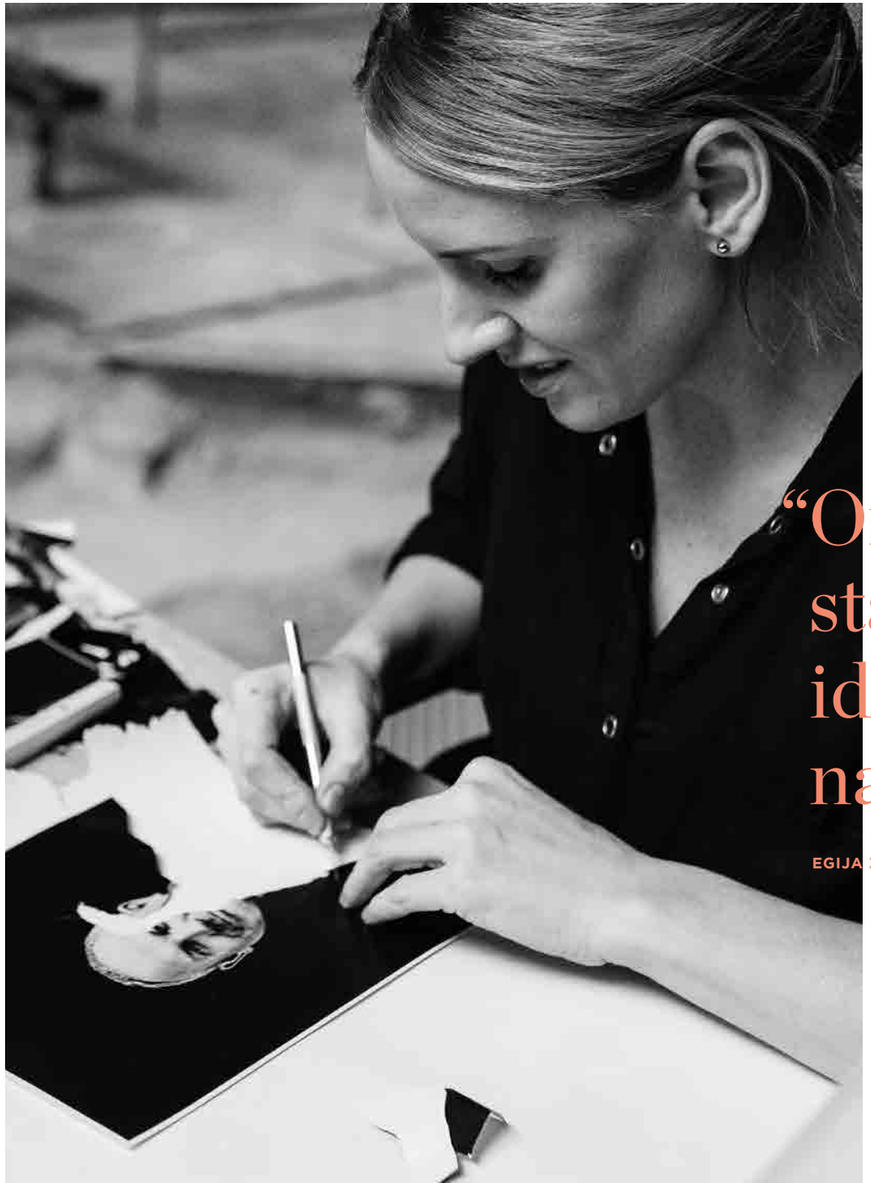

"Once I get started, the ideas come naturally."

EGIJA ZIRAPA

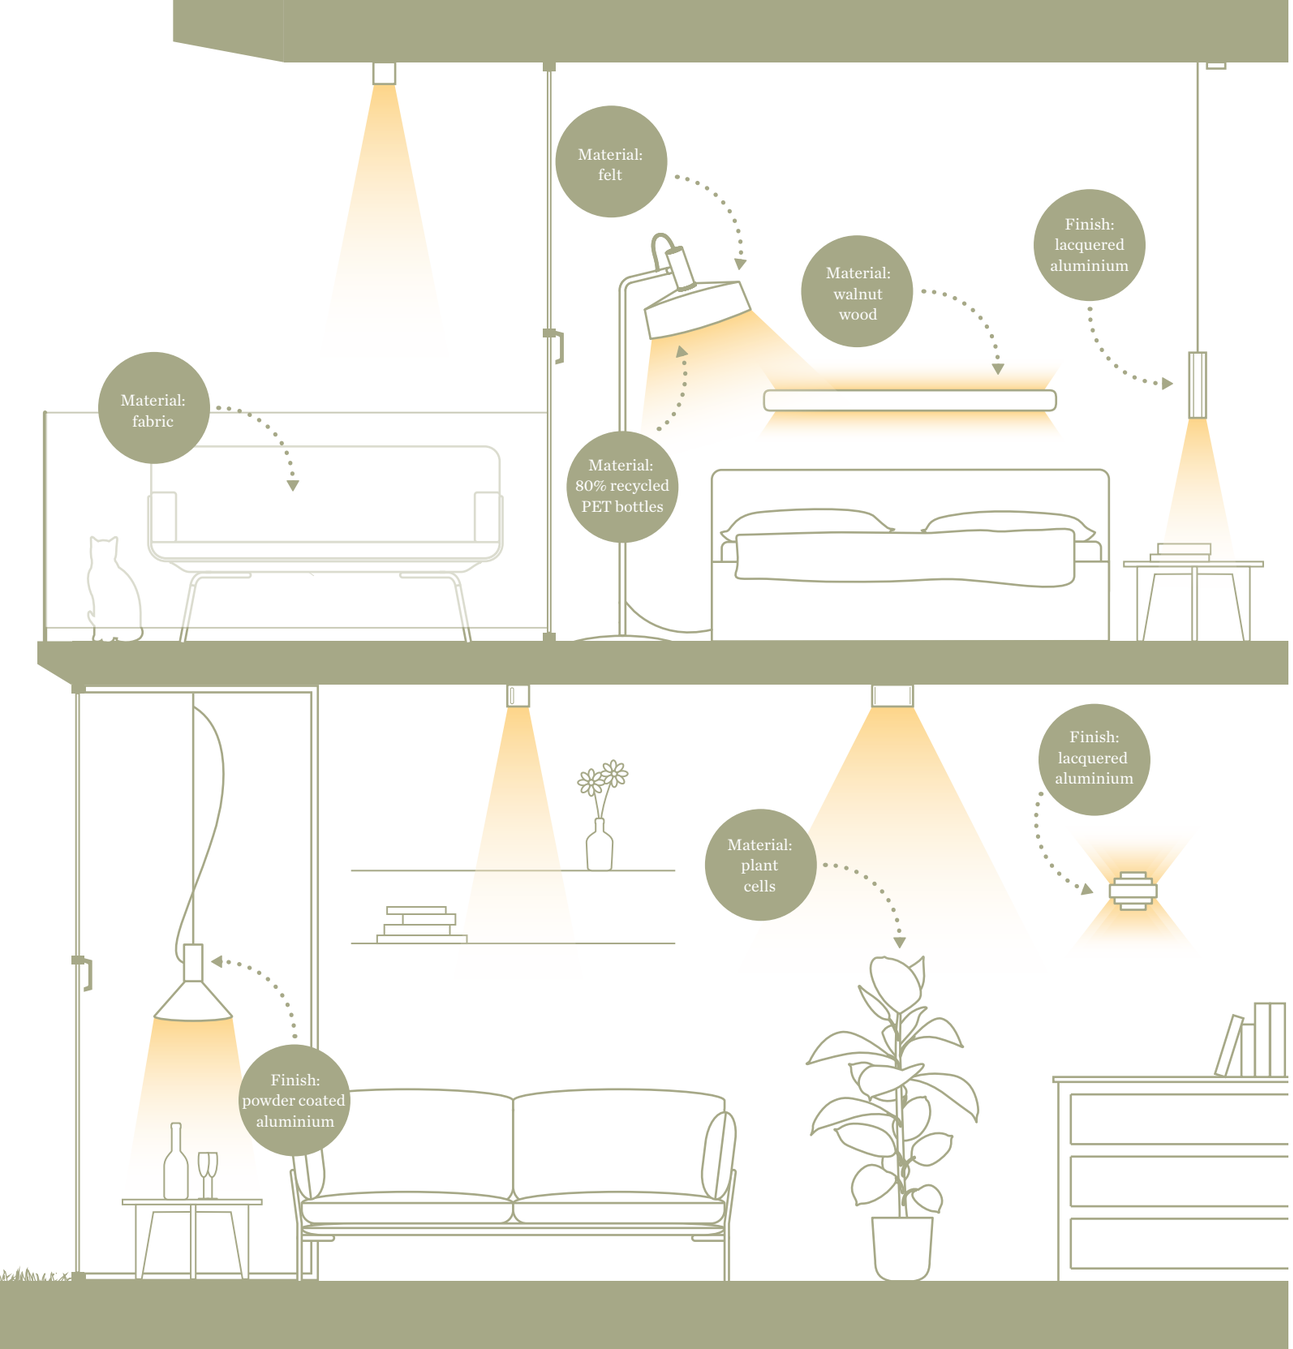

COME CLOSER

AMAZING FINISHES & MATERIALS

There is almost no material that our designers shy away from – whether it's marble, felt, or precious walnut wood. It is precisely this exceptional combination of textures, colours, and shapes that makes a genuine Wever & Ducré luminaire. It makes them unique. Feeling particularly drawn to the aluminium version? Then there's all the more reason to celebrate. Because you can choose from a number of different finishes. Like the sound of that? Can't wait to get started? Piece together your favourite right now. On pages 720-721 you will find everything you need to do this.

Ob Marmor, Filz oder edles Walnussholz: Es gibt fast kein Material, an das sich unsere Designer nicht heranwagen. Aber genau diese außergewöhnliche Kombination aus Oberflächen, Farben und Formen ist es, die eine echte Wever & Ducré-Leuchte ausmacht. Und sie zum wahren Einzelstück werden lässt. Ihnen hat es vor allem die Aluminiumvariante angetan? Dann gibt's noch mehr Grund zur Freude. Denn hier können Sie zusätzlich aus vielen unterschiedlichen Finishings wählen. Klingt prima, aber jetzt möchten Sie endlich loslegen? Dann stellen Sie sich Ihren persönlichen Favoriten gleich zusammen. Auf den Seiten 720-721 finden Sie alles, was Sie dazu brauchen.

SEE ALL MATERIALS AND FINISHES
weverducre.com/materials

SUSTAINABLE BY DESIGN

5 YEAR GUARANTEE

WE ARE COMMITTED

Our products are developed according to the standards of the Ecodesign Directive and ensure that components can be replaced as easily as possible. This is one of the reasons why we grant a five-year guarantee* for many of our products. But it's not just our products that are built to last, our choice of materials and colours is also geared towards sustainability. In collaboration with COLORNETWORK®, we develop products in "Sustained Colors". These are products characterised by their long-term validity and versatility.

Unsere Produkte werden nach den Standards der Ökodesign-Richtlinie entwickelt und stellen einen möglichst leichten Austausch von Komponenten sicher. Ein Grund, weswegen wir für viele unserer Produkte 5 Jahre Garantie* gewähren.
Aber nicht nur unsere Produkte sind langlebig, auch unsere Material- und Farbwahl ist auf Nachhaltigkeit ausgerichtet.
In Zusammenarbeit mit dem COLORNETWORK® entwickeln wir Produkte in „Sustained Colors". Hierbei handelt es sich um Produkte, welche sich durch Langzeitgültigkeit und Kombinationsfreude auszeichnen.

*Guarantee conditions available on weverducre.com apply
*Es gelten die auf weverducre.com verfügbaren Garantiebedingungen

"A Sustained Color is characterised by long-term validity and versatility."

OLIVER MÄRSCH
WEVER & DUCRÉ SALES DIRECTOR
MEMBER OF COLORNETWORK®

COLOR NET WORK®

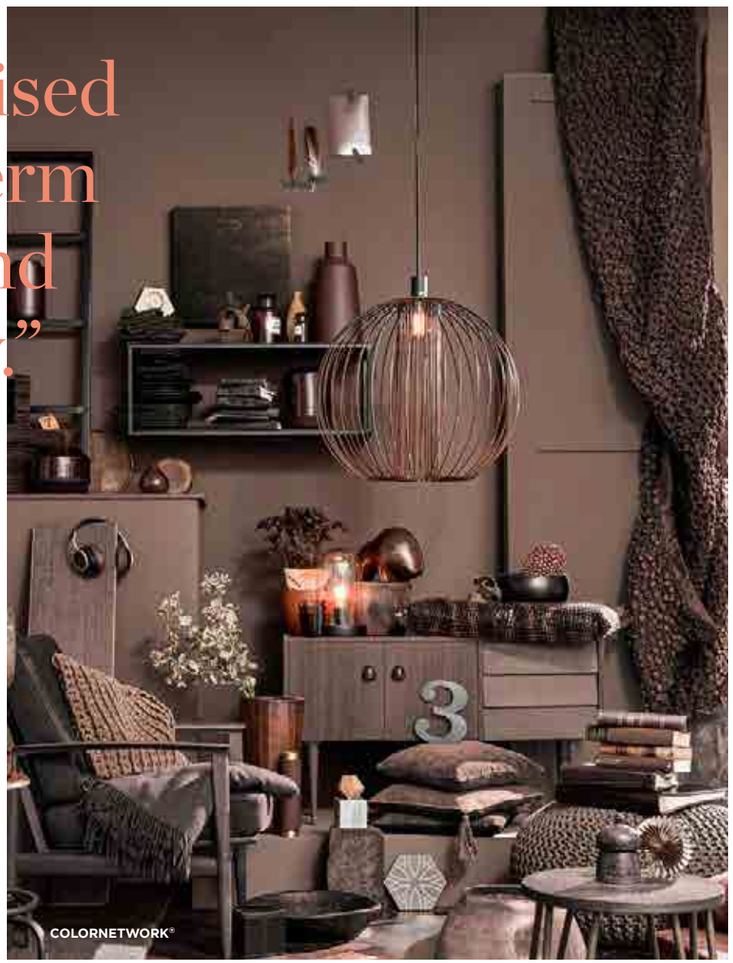

I CAN'T WAIT, BABY

IT'S ALL-SYSTEMS-GO IN 48 HOURS

Well, that's the thing about crushes. Once you've set your heart on a light, of course you want it straightaway. The good news is that our super-fast delivery service makes this easy. 90% of our collection is shipped straight from our Kortrijk warehouse. No more endless waiting. And, of course, no plastic packaging. At all. Want to know for sure? Then simply check your crush's availability online. You can already start chilling the champagne.

Tja, so ist das mit dem Product Crush: Hat man sich erst mal in eine Leuchte verliebt, will man sie natürlich sofort bei sich haben. Die gute Nachricht: Mit unserem superschnellen Lieferservice ist das kein Problem. Denn 90% der Kollektion kann direkt von unserem Warehouse in Kortrijk aus versandt werden. Ohne lange Wartezeiten. Und natürlich ganz ohne Plastikverpackung. Sie möchten's genau wissen? Dann checken Sie die Verfügbarkeit Ihres Lieblings doch einfach online. Den Champagner können Sie in der Zwischenzeit ja schon mal kaltstellen.

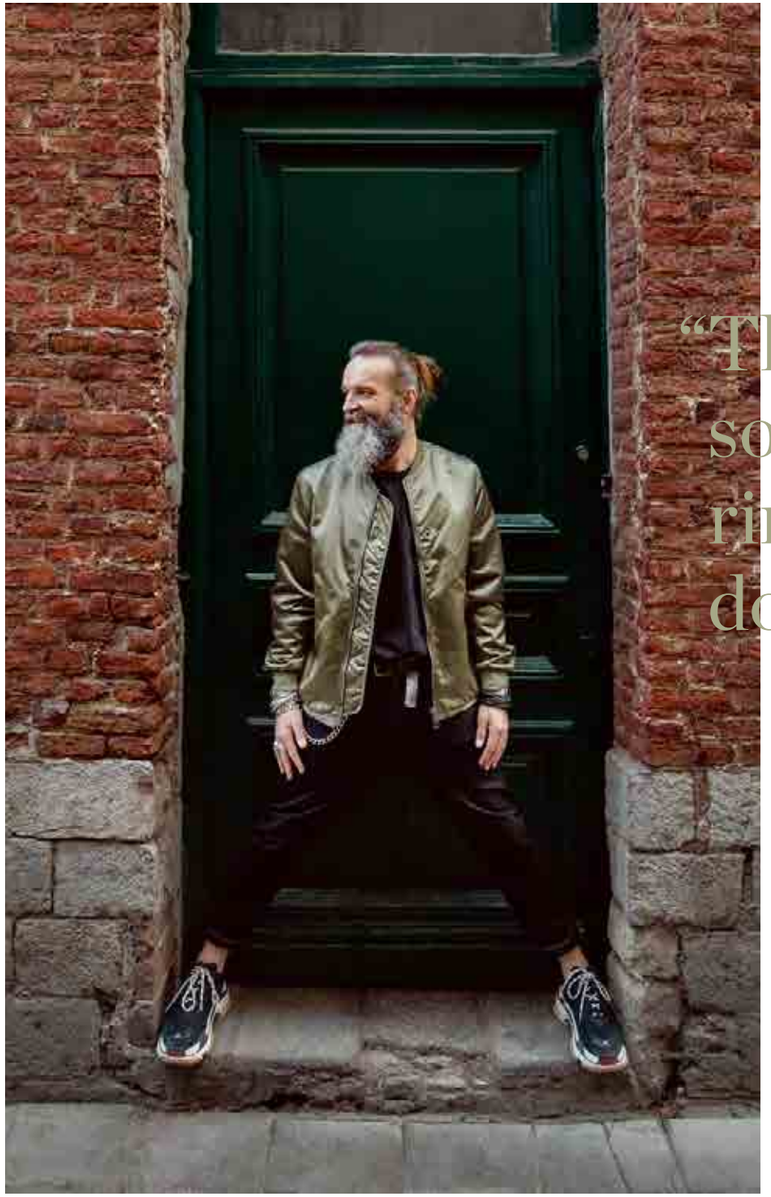

"The nicest sound? The ringing of the doorbell."

YVES MARGINET
AREA SALES MANAGER

IN
DOOR

DESIGNER FAMILIES

p. 25 — 159

ROOMOR
3H DRAFT

ROOMOR TUBE SUSPENDED 1.0
p. 29

ROOMOR TUBE SUSPENDED 2.0
p. 31

ROOMOR OFFICE CABLE SUSPENDED
p. 33

ROOMOR OFFICE TUBE SUSPENDED
p. 35

ROOMOR OFFICE CEILING SURFACE
p. 37

ROOMOR CABLE SUSPENDED
p. 39

ROOMOR WALL 2.0
p. 41

ROOMOR WALL 4.0
p. 47

ROOMOR TABLE 1.0
p. 49

ROOMOR FLOOR
p. 51

MIRRO
13&9 DESIGN

MIRRO CEILING
p. 55

MIRRO SUSPENDED
p. 57

MIRRO WALL
p. 59

MIRRO TABLE
p. 65

MIRRO FLOOR
p. 67

DRO
13&9 DESIGN

DRO CEILING
p. 69

DRO SUSPENDED
p. 71

DRO WALL
p. 75

DRO TABLE | FLOOR
p. 79

DRO FLOOR
p. 83

ROCK
13&9 DESIGN

ROCK SUSPENDED
p. 85

ROCK FLOOR
p. 87

ROCK NAKED
p. 87

WIRO
BERND STEINHUBER

WIRO CEILING
p. 91

WIRO SUSPENSION SYSTEMS
p. 91

WIRO WALL
p. 119

WIRO TABLE
p. 121

WIRO FLOOR
p. 123

J.J.W.
JULES WABBES

J.J.W. WALL
p. 127

J.J.W. CEILING
p. 133

J.J.W. SUSPENDED
p. 135

REVER
MARCELLO ZILIANI

REVER SUSPENDED
p. 143

REVER WALL
p. 145

REVER TABLE
p. 149

REVER DINING
p. 153

REVER FLOOR
p. 159

ROOMOR OFFICE
SUSPENDED

ROOMOR
SUSPENDED

MIX AND MATCH
weverducre.com/roomor-configurator

A TRUE ALL-ROUNDER

ROOMOR HAS IT

The rumours are true: ROOMOR is a lamp that can change its appearance faster than a chameleon. And all it takes is a few simple steps. Just choose the shape and colour and combine them to your heart's content. As a result, ROOMOR can be transformed into everything from a minimalistic floor lamp to an opulent suspended luminaire or discreet table lamp. And because ROOMOR can be fully adapted to its surroundings when it comes to materials, all of the shade designs are offered in either powder-coated aluminium or finely textured felt. And to make things a little more fun in the office, ROOMOR is now also available as a glare-free office light with an UGR value ≤ 19. Nothing could be more flexible.

Sie können den Gerüchten ruhig glauben: ROOMOR ist eine Leuchte, die ihre Optik schneller wechselt als ein Chamäleon. Und das mit nur wenigen Handgriffen. Einfach Form und Farbe auswählen und loskombinieren. So wird aus ROOMOR mal eine minimalistische Stehlampe, mal eine opulente Hängeleuchte und mal eine dezente Tischlampe. Und weil sich ROOMOR auch in puncto Material ganz ihrer Umgebung anpasst, sind alle Schirmformen entweder in pulverbeschichtetem Aluminium oder in fein strukturiertem Filz erhältlich. Und damit es auch im Büro etwas abwechslungsreicher wird, gibt es ROOMOR nun auch als blendfreie Leuchte mit einem UGR Wert ≤ 19. Flexibler geht´s nicht.

MIX AND MATCH

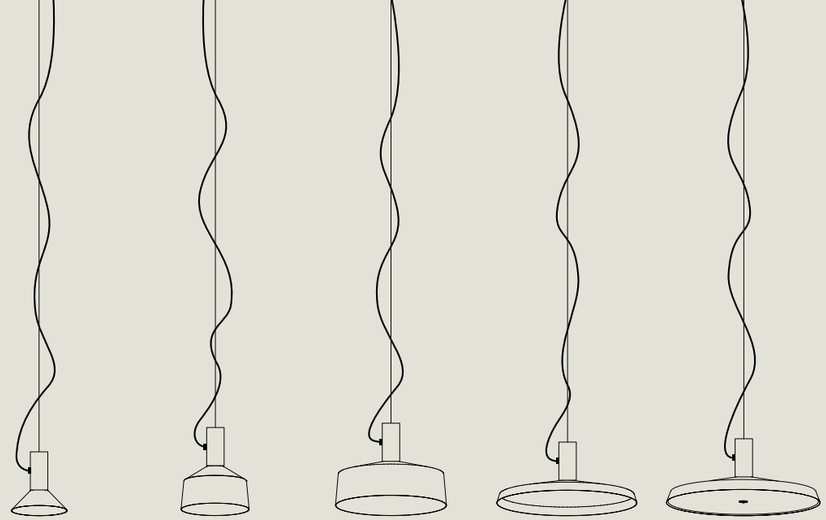

	1.0	2.0	3.0	4.0	OFFICE
	ø205	ø250	ø405	ø510	ø560
MOUNTING	**SHADE**				
TUBE SUSPENDED					
1.0 PAR16 | E27	●	◐●●	◐●●	◐●●	◐●●	
2.0 PAR16 | E27	●	◐●●	◐●●	◐●●	◐●●	
2.0 LED	●					●
CABLE SUSPENDED					
1.0 PAR16 | E27	●●	◐◖●●	◐◖●●	◐◖●●	◐◖●●	
1.0 LED	●					●
CEILING SURFACE					
1.0 LED	●					●
WALL SURFACE					
1.0 PAR16	●●	◐◖●●				
2.0 PAR16	●	◐●●	◐●●			
3.0 PAR16	●	◐●●				
4.0 PAR16	●	◐●●	◐●●	◐●●	◐●●	
5.0 PAR16	●	◐●●				
TABLE					
1.0 PAR16	●●	◐◖●●				
2.0 PAR16	●	◐●●				
FLOOR SURFACE					
1.0 PAR16	●	◐●●	◐●●	◐●●	◐●●	

● R | coral red ● G | cement grey ◖ RW | coral red + white ◖ G | cement grey + white ◐ K | black + gold ● B | black ● F | grey felt ● W | white

back

F1

F2

B3

K4

ROOMOR

TUBE SUSPENDED

reddot award 2019
winner lighting design



1.0 PAR16

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
wet painted aluminium

1.10kg IP20 45°/45°

mounting only

	CODE
	168120B_ _

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim
2700K | 360lm

	CODE
	901228B3

more lamps and specs on page 729

extension tube

	CODE
0.5m	90019192
1.0m	90019191



1.0 E27

A60 max. 15W | E27
220-240VAC | 50-60Hz
wet painted aluminium

1.10kg IP20 45°/45°

mounting only

	CODE
	1681E0B_ _

OPTIONAL

A60 LED E27 9W | phase-cut dim
2700K | 800lm

	CODE
	9003E152

more lamps and specs on page 730

extension tube

	CODE
0.5m	90019192
1.0m	90019191

ALWAYS USE

no shade

	CODE
	00

shade 1.0 | Ø205mm

	CODE
grey felt	F1
	K1
	B1

shade 2.0 | Ø250mm

	CODE
grey felt	F2
	K2
	B2

shade 3.0 | Ø405mm

	CODE
grey felt	F3
	K3
	B3

shade 4.0 | Ø510mm

	CODE
grey felt	F4
	K4
	B4

overview on page 27

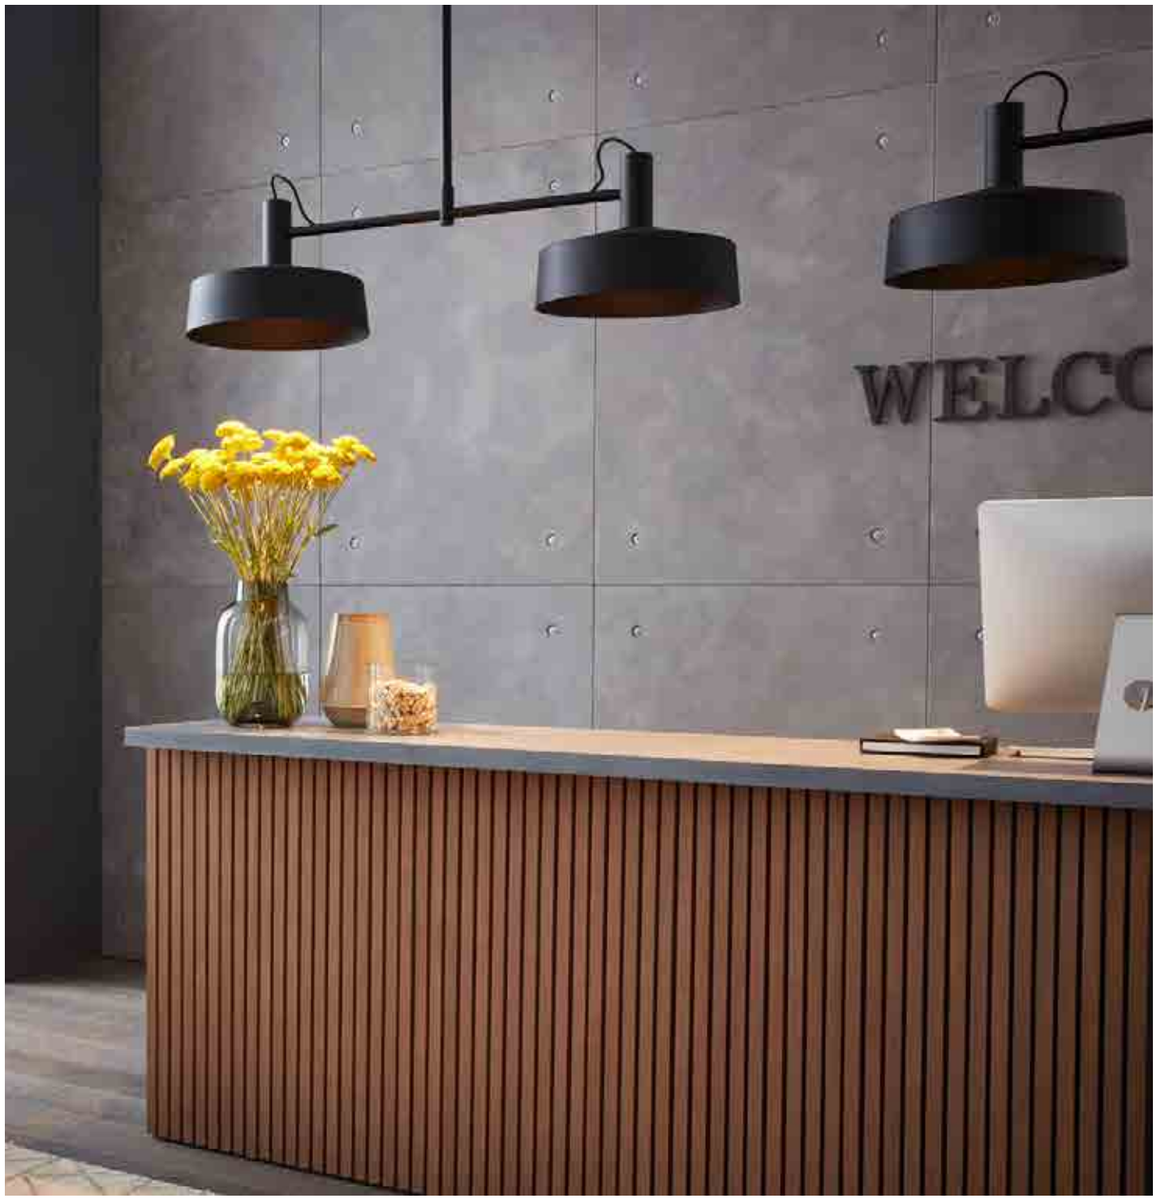

ROOMOR

TUBE SUSPENDED

reddot award 2019
winner lighting design

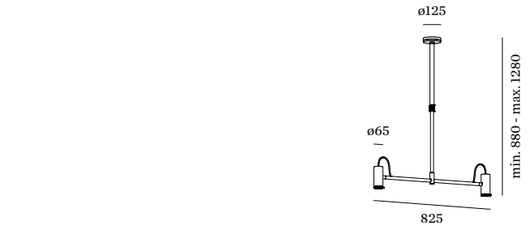

2.0 PAR16

2x PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
wet painted aluminium

1.75kg IP20 45°/45°

mounting only

	CODE
	169120B_ _

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim
2700K | 360lm

	CODE
	901228B3

more lamps and specs on page 729

extension tube

	CODE
0.5m	90019192
1.0m	90019191

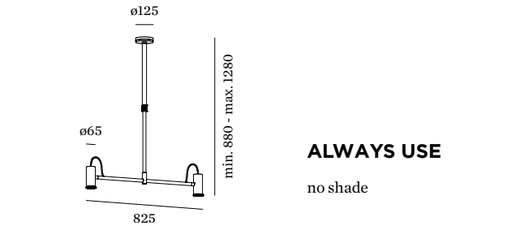

2.0 E27

2x A60 max. 15W | E27
220-240VAC | 50-60Hz
wet painted aluminium

1.75kg IP20 45°/45°

mounting only

	CODE
	1691E0B_ _

OPTIONAL

A60 LED E27 9W | phase-cut dim
2700K | 800lm

	CODE
	9003E152

more lamps and specs on page 730

extension tube

	CODE
0.5m	90019192
1.0m	90019191

F1

F2

K3

B4

ALWAYS USE

no shade

	CODE
	00

shade 1.0 | Ø205mm | 2 shades incl.

	CODE
grey felt	F1
	K1
	B1

shade 2.0 | Ø250mm | 2 shades incl.

	CODE
grey felt	F2
	K2
	B2

shade 3.0 | Ø405mm | 2 shades incl.

	CODE
grey felt	F3
	K3
	B3

shade 4.0 | Ø510mm | 2 shades incl.

	CODE
grey felt	F4
	K4
	B4

overview on page 27

ROOMOR OFFICE

CABLE SUSPENDED



1.0

LED 35W | 220-240VAC 50-60Hz | PCB 3-step | incl. PS DALI dim | DALI push dim with memory function | wet painted aluminium

3.00kg IP20 1-0,3-10 P UGR≤19/65°

microprismatic

	CODE
	1681M5W_
	1681M5B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	3450	>90	5
4000K	3680	>90	7

opal

	CODE
	168185W_
	168185B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	3630	>90	5
4000K	3870	>90	7

UGR ≤19/65°
≤3000cd/m²

only for microprismatic

available from autumn 2021

URBAN SPACES | STUDIO KOMO STUTTGART | GERMANY

ROOMOR OFFICE

TUBE SUSPENDED



2.0

LED 2x LED 35W | 220-240VAC 50-60Hz | PCB 3-step | incl. PS DALI dim | DALI push dim with memory function | wet painted aluminium

6.00kg IP20 0,3+ UGR≤19/65°

microprismatic

	CODE
	1682M5W_
	1682M5B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	2x3450	>90	5
4000K	2x3680	>90	7

opal

	CODE
	168285W_
	168285B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	2x3630	>90	5
4000K	2x3870	>90	7

UGR ≤19/65°
≤3000cd/m²

only for microprismatic

available from autumn 2021

OPTIONAL

extension tube

	CODE
0.5m	90019192
1.0m	90019191

URBAN SPACES | STUDIO KOMO STUTTGART | GERMANY

ROOMOR OFFICE

CEILING SURFACE



1.0

LED 35W | 220-240VAC
50-60Hz | PCB 3-step | incl. PS
DALI dim | DALI push dim with
memory function | wet painted
aluminium

2.80kg IP20 0,3+ UGR≤19/65°

microprismatic

	CODE
	1683M5W_
	1683M5B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	3450	>90	5
4000K	3680	>90	7

opal

	CODE
	168385W_
	168385B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	3630	>90	5
4000K	3870	>90	7

UGR ≤19/65°
≤3000cd/m²

only for microprismatic

available from autumn 2021

3H DRAFT

back

ROOMOR

CABLE SUSPENDED

reddot award 2019
winner lighting design

R1

G2

F2

K3

B4



1.0 PAR16

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
wet painted aluminium
incl. cable and ceiling base in
the same colour as the lamp body

0.80kg IP20

mounting only

CODE	
248120R_ _	
248120G_ _	
248120B_ _	

6.0m suspension on page 740

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim
2700K | 360lm

CODE	
901228W3	
901228B3	

more lamps and specs on page 729



1.0 E27

A60 max. 15W | E27
220-240VAC | 50-60Hz
wet painted aluminium
incl. cable and ceiling base in
the same colour as the lamp body

0.80kg IP20

mounting only

CODE	
2481E0R_ _	
2481E0G_ _	
2481E0B_ _	

6.0m suspension on page 740

OPTIONAL

A60 LED E27 9W | phase-cut dim
2700K | 800lm

CODE	
9003E152	

more lamps and specs on page 730

ALWAYS USE

no shade

CODE	
00	

shade 1.0 | Ø205mm

CODE	
R1	
G1	
grey felt	F1
K1	
B1	

shade 2.0 | Ø250mm

CODE	
R2	
G2	
grey felt	F2
K2	
B2	

shade 3.0 | Ø405mm

CODE	
R3	
G3	
grey felt	F3
K3	
B3	

shade 4.0 | Ø510mm

CODE	
R4	
G4	
grey felt	F4
K4	
B4	

overview on page 27

ZENTRUMLAB LA GARINGA | SPAIN

ROOMOR

WALL SURFACE

reddot award 2019
winner lighting design



1.0

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
wet painted steel and aluminium

0.90kg IP20 45°/45°

mounting only

	CODE
	338120R_ _
	338120G_ _
	338120B_ _

ALWAYS USE

no shade

	CODE
	00

shade 1.0 | Ø205mm

	CODE
	R1
	G1
grey felt	F1
	K1
	B1

overview on page 27

2.0

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
wet painted steel and aluminium

1.10kg IP20 45°/45°

mounting only

	CODE
	338220B_ _

ALWAYS USE

no shade

	CODE
	00

shade 1.0 | Ø205mm

	CODE
grey felt	F1
	K1
	B1

shade 2.0 | Ø250mm

	CODE
grey felt	F2
	K2
	B2

overview on page 27

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim
2700K | 360lm

	CODE
	901228W3
	901228B3

more lamps and specs on page 729

HOTEL ROTTERDAM | NETHERLANDS

ROOMOR

WALL SURFACE

reddot award 2019
winner lighting design





3.0

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
wet painted aluminium

0.85kg IP20 45°/45° 30°/30°

mounting
cable plug with hand switch

	CODE
	339120B_ _



cable base round

	CODE
	339220B_ _



5.0

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
wet painted steel and aluminium

1.45kg IP20 45°/45° 30°/30°

mounting
cable plug with hand switch

	CODE
	340120B_ _



cable base round

	CODE
	340220B_ _



ALWAYS USE

no shade

	CODE
	00

shade 1.0 | Ø205mm

	CODE
grey felt	F1
	K1
	B1

ALWAYS USE

no shade

	CODE
	00

shade 1.0 | Ø205mm

	CODE
grey felt	F1
	K1
	B1

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim
2700K | 360lm

	CODE
	901228B3

more lamps and specs on page 729

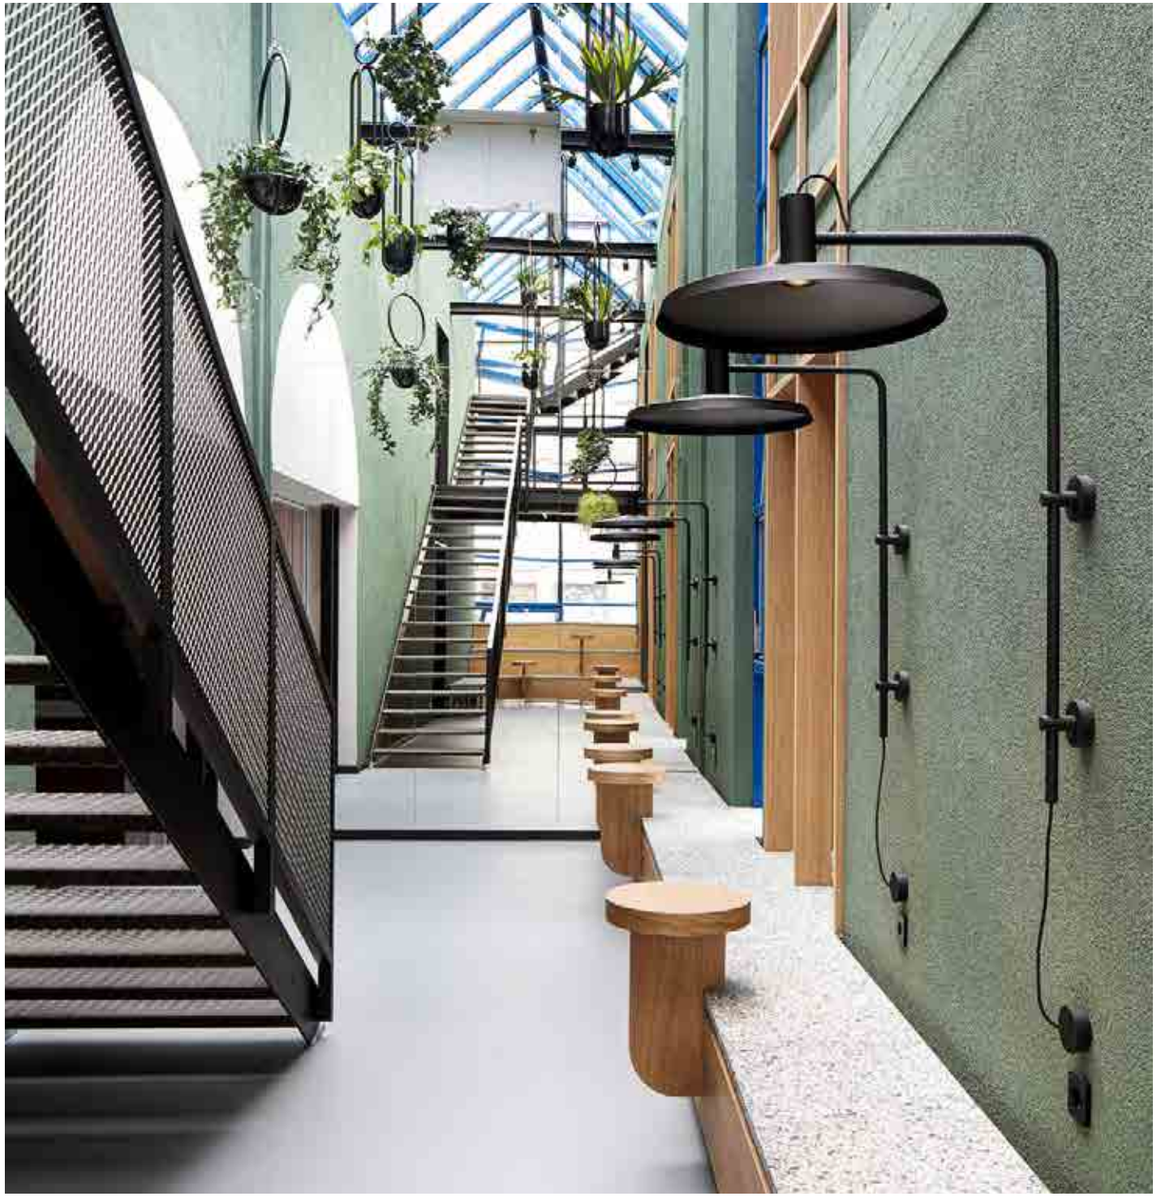

ROOMOR

WALL SURFACE

reddot award 2019
winner lighting design

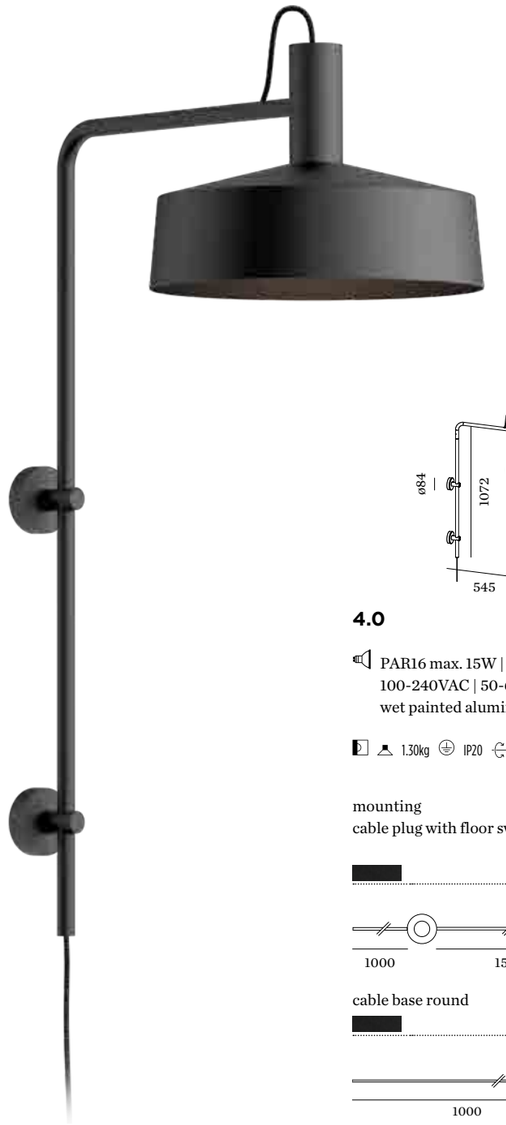



4.0

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
wet painted aluminium

1.30kg IP20 45°/45° 30°/30°

mounting
cable plug with floor switch

	CODE
	339520B_ _



cable base round

	CODE
	339620B_ _

ALWAYS USE

no shade

	CODE
	00

shade 1.0 | Ø205mm

	CODE
grey felt	F1
	K1
	B1

shade 2.0 | Ø250mm

	CODE
grey felt	F2
	K2
	B2

shade 3.0 | Ø405mm

	CODE
grey felt	F3
	K3
	B3

shade 4.0 | Ø510mm

	CODE
grey felt	F4
	K4
	B4

overview on page 27

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim
2700K | 360lm

	CODE
	901228B3

more lamps and specs on page 729

ROOMOR

TABLE

reddot award 2019
winner lighting design





1.0

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
wet painted steel and aluminium
incl. cable in the same colour as the lamp body | black plug with switch for black cable otherwise transparent plug with switch

3.40kg IP20 45°/45° 30°/30°

mounting
cable plug with hand switch

	CODE
	637120R_ _
	637120G_ _
	637120B_ _

2.0

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
wet painted steel and aluminium
incl. cable in the same colour as the lamp body | black plug with switch for black cable otherwise transparent plug with switch

4.50kg IP20 45°/45° 30°/30°

mounting
cable plug with hand switch

	CODE
	639120B_ _

ALWAYS USE

no shade

	CODE
	00

shade 1.0 | Ø205mm

	CODE
	R1
	G1
grey felt	F1
	K1
	B1

ALWAYS USE

no shade

	CODE
	00

shade 1.0 | Ø205mm

	CODE
grey felt	F1
	K1
	B1

OPTIONAL

PAR16 LED GU10 7W | 2700K | 360lm

	CODE
	901228W3
	901228B3

more lamps and specs on page 729

PRIVATE RESIDENCE | JENNIFER MAECKLER GERMANY

3H DRAFT

back

PRIVATE RESIDENCE | MARKEY & SCHELSTRAETE BELGIUM

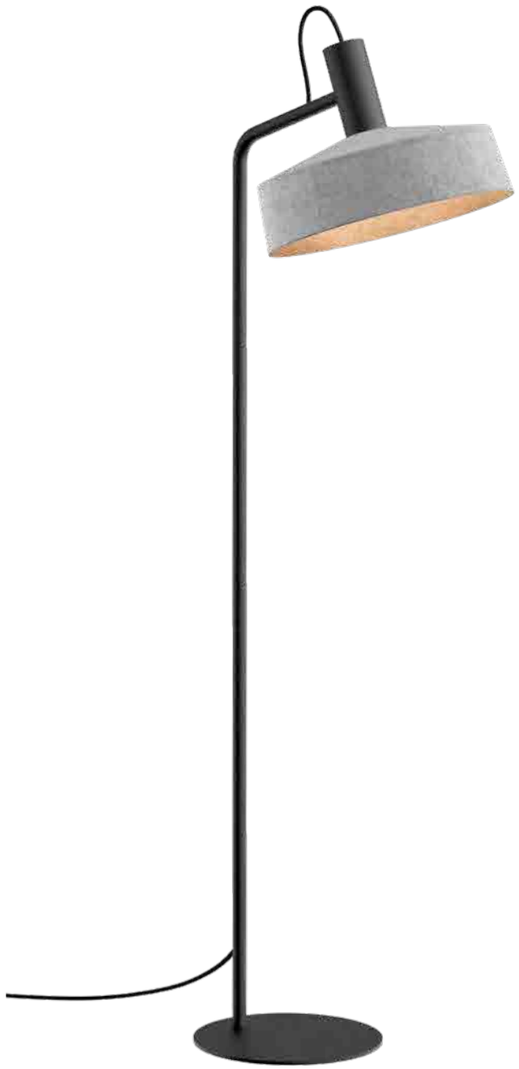

3H DRAFT

ROOMOR

FLOOR SURFACE

reddot award 2019
winner lighting design



1.0

PAR16 max. 15W | GU10
100-240VAC | 5O-60Hz
wet painted steel and aluminium

5.60kg IP20 45°/45° 30°/30°

mounting
black cable plug with floor switch

	CODE
	638120B_ _

ALWAYS USE

no shade

	CODE
	00

shade 1.0 | Ø205mm

	CODE
grey felt	F1
	K1
	B1

shade 2.0 | Ø250mm

	CODE
grey felt	F2
	K2
	B2

shade 3.0 | Ø405mm

	CODE
grey felt	F3
	K3
	B3

overview on page 27

OPTIONAL

PAR16 LED GU10 7W | 2700K | 360lm

	CODE
	901228B3

more lamps and specs on page 729

back

DESIGNER

“We want to instill soul, to imbue products with emotional added value.”

ANASTASIJA & MARTIN LESJAK, 13&9 DESIGN

Anastasija and Martin Lesjak from the studio 13&9 are completely focused on “transferring the creative energy of a brand to the product itself”. This approach is also reflected in the three collections that the Austrian design team has created exclusively for Wever & Ducré.
First and foremost: the natural shale veneer of ROCK with its expressive character, which makes every luminaire completely unique. And DRO, for which the two designers have succeeded in permanently capturing the fleeting beauty of a dewdrop. “We dealt intensively with the so-called hydrophobic effect when designing this luminaire,” explains Anastasija. “It causes water to bead off or adhere to the surface, thus creating nestling or upright shapes – an aesthetic that made a special impression on us.” Besides finding inspiration in nature, 13&9 also draws upon an abundance of other creative realms such as art, fashion, and architecture – a transdisciplinary approach that is articulated so eloquently in the MIRRO collection designed together with Sabrina Stadlober. Both the beholder and the surroundings can be mirrored simultaneously in the reflective metallic surface of the luminaires. A masterful technique that 13&9 employs to create an intense connection between user and product. And that is exactly what makes all of the pieces designed by 13&9 so fascinating.

Anastasija und Martin Lesjak vom Studio 13&9 konzentrieren sich ganz darauf, „die kreative Energie einer Marke auf das Produkt zu übertragen“. Dieser Ansatz spiegelt sich auch in den insgesamt drei Kollektionen wider, die das österreichische Designerteam exklusiv für Wever & Ducré entworfen hat. Allen voran: die charakterstarke ROCK, deren unterschiedliches Schieferfurnier jede Leuchte zu einem absoluten Unikat macht. Aber auch DRO, mit der es den beiden Designern gelungen ist, die flüchtige Schönheit eines Tautropfens dauerhaft einzufangen. „Für diese Leuchte haben wir uns intensiv mit dem sogenannten hydrophoben Effekt auseinandergesetzt.“, erklärt Anastasija. „Er bewirkt, dass Wasser abperlt oder anhaftet, und lässt dadurch sich anschmiegende oder stehende Formen entstehen. Eine Ästhetik, die uns besonders beeindruckt hat.“ Inspirieren lassen sich 13&9 aber nicht nur von der Natur, sondern auch von vielen anderen Kreativbereichen wie Kunst, Mode oder Architektur. Eine transdisziplinäre Herangehensweise, die bei der mit Designerin Sabrina Stadlober entworfenen Kollektion MIRRO besonders schön zum Ausdruck kommt. Gleichzeitig können sich Betrachter und Umgebung in der metallisch-reflektierenden Oberfläche der Leuchten spiegeln. Ein gekonnter Kunstgriff, mit dem 13&9 eine intensive Verbindung zwischen Benutzer und Produkt herstellen. Und genau das ist es auch, was die besondere Faszination aller von 13&9 entworfenen Objekte ausmacht.

HAVE A LOOK
weverducre.com/dro

MORE INFO
weverducre.com/mirro

CURIOUS?
weverducre.com/rock

back

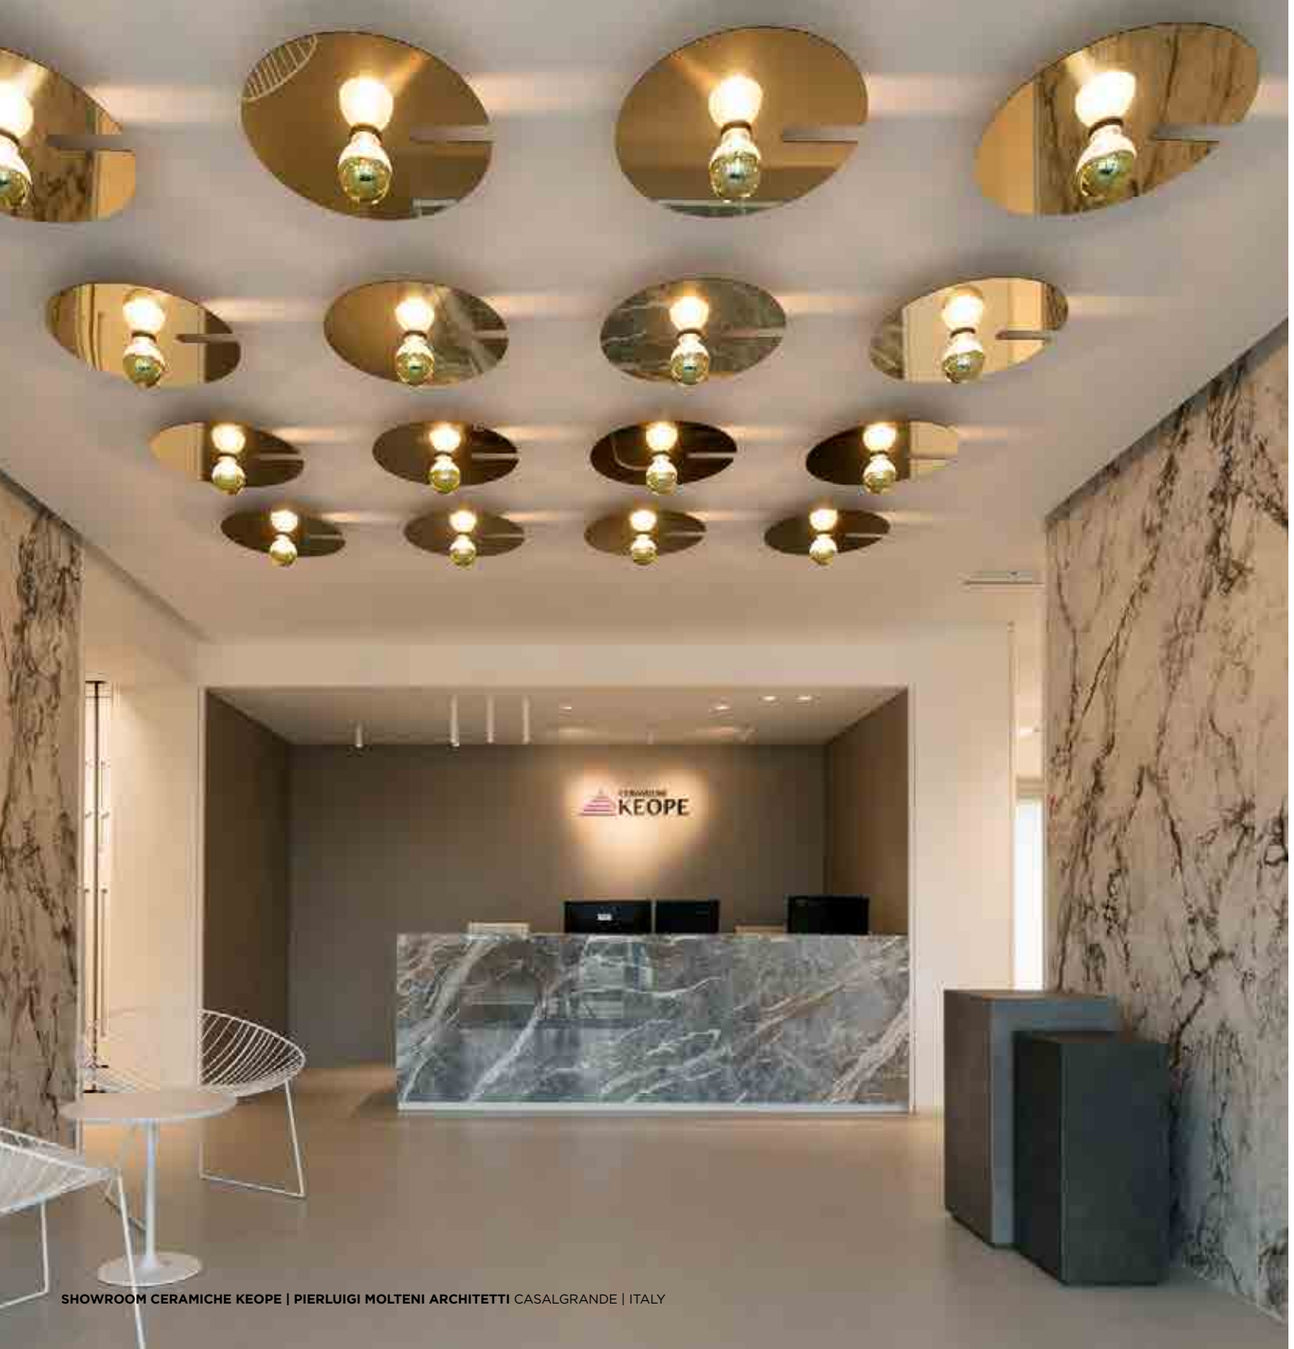

SHOWROOM CERAMICHE KEOPE | PIERLUIGI MOLTENI ARCHITETTI CASALGRANDE | ITALY

MIRRO

CEILING SURFACE

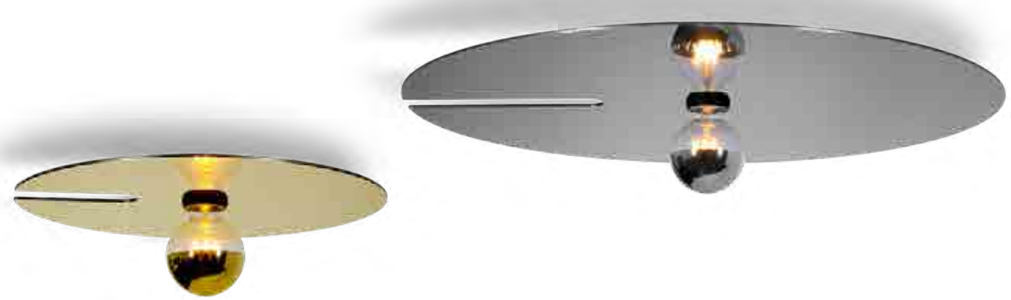







1.0

LED A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | single side reflective
aluminium composite panel

0.70kg IP20

	CODE
	6321E8GB0
	6321E8NB0

OPTIONAL

A60 LED E27 6W | gold mirror
phase-cut dim

	CODE
2200K | 400lm	9003E150
2700K | 500lm	9003E139

A60 LED E27 6W | silver mirror
phase-cut dim

	CODE
2700K | 500lm	9003E140

2.0

LED G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | single side reflective
aluminium composite panel

1.00kg IP20

	CODE
	6322E8GB0
	6322E8NB0

OPTIONAL

G95 LED E27 6W | gold mirror
phase-cut dim

	CODE
2200K | 400lm	9003E151
2700K | 500lm	9003E142

G95 LED E27 6W | silver mirror
phase-cut dim

	CODE
2700K | 500lm	9003E149

3.0

LED G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | single side reflective
aluminium composite panel

2.10kg IP20

	CODE
	6323E8GB0
	6323E8NB0

OPTIONAL

G95 LED E27 6W | gold mirror
phase-cut dim

	CODE
2200K | 400lm	9003E151
2700K | 500lm	9003E142

G95 LED E27 6W | silver mirror
phase-cut dim

	CODE
2700K | 500lm	9003E149

FURNITURE STORE KOBALT BRUGGE | BELGIUM

MIRRO

CEILING SUSPENDED





1.0

LED A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | single side reflective
aluminium composite panel

0.70kg IP20

2.5m

	CODE
	6341E8GB0
	6341E8NB0

6.0m

	CODE
	6344E8GB0
	6344E8NB0

OPTIONAL

A60 LED E27 6W | gold mirror
phase-cut dim

	CODE
2200K | 400lm	9003E150
2700K | 500lm	9003E139

A60 LED E27 6W | silver mirror
phase-cut dim

	CODE
2700K | 500lm	9003E140

2.0

LED G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | single side reflective
aluminium composite panel

1.00kg IP20

2.5m

	CODE
	6342E8GB0
	6342E8NB0

6.0m

	CODE
	6345E8GB0
	6345E8NB0

OPTIONAL

G95 LED E27 6W | gold mirror
phase-cut dim

	CODE
2200K | 400lm	9003E151
2700K | 500lm	9003E142

G95 LED E27 6W | silver mirror
phase-cut dim

	CODE
2700K | 500lm	9003E149

3.0

LED G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | single side reflective
aluminium composite panel

2.10kg IP20

2.5m

	CODE
	6343E8GB0
	6343E8NB0

6.0m

	CODE
	6346E8GB0
	6346E8NB0

OPTIONAL

G95 LED E27 6W | gold mirror
phase-cut dim

	CODE
2200K | 400lm	9003E151
2700K | 500lm	9003E142

G95 LED E27 6W | silver mirror
phase-cut dim

	CODE
2700K | 500lm	9003E149

MIRRO

WALL SURFACE









1.0 EXTENDED

LED A60 4-15W | E27
220-240VAC | 50-60Hz
aluminium | single side reflective
aluminium composite panel

0.70kg IP20 35°/35°

	CODE
	6331E8GB0
	6331E8NB0

cable plug with dimmer

1.0

LED A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | single side reflective
aluminium composite panel

0.70kg IP20

	CODE
	6321E8GB0
	6321E8NB0

2.0

LED G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | single side reflective
aluminium composite panel

1.00kg IP20

	CODE
	6322E8GB0
	6322E8NB0

3.0

LED G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | single side reflective
aluminium composite panel

2.10kg IP20

	CODE
	6323E8GB0
	6323E8NB0

OPTIONAL

A60 LED E27 6W | gold mirror
phase-cut dim

	CODE
2200K | 400lm	9003E150
2700K | 500lm	9003E139

A60 LED E27 6W | silver mirror
phase-cut dim

	CODE
2700K | 500lm	9003E140

OPTIONAL

A60 LED E27 6W | gold mirror
phase-cut dim

	CODE
2200K | 400lm	9003E150
2700K | 500lm	9003E139

A60 LED E27 6W | silver mirror
phase-cut dim

	CODE
2700K | 500lm	9003E140

OPTIONAL

G95 LED E27 6W | gold mirror
phase-cut dim

	CODE
2200K | 400lm	9003E151
2700K | 500lm	9003E142

G95 LED E27 6W | silver mirror
phase-cut dim

	CODE
2700K | 500lm	9003E149

OPTIONAL

G95 LED E27 6W | gold mirror
phase-cut dim

	CODE
2200K | 400lm	9003E151
2700K | 500lm	9003E142

G95 LED E27 6W | silver mirror
phase-cut dim

	CODE
2700K | 500lm	9003E149

RESTAURANT ROOTS KNOKKE-HEIST | BELGIUM

HOTEL NEW YORK | USA

ELEWIJT CENTER ~~ZEMST~~ back | BELGIUM

MIRRO

TABLE

back



1.0

LED A60 4-15W | E27
220-240VAC | 50-60Hz
aluminium | single side reflective
aluminium composite panel

1.30kg IP20

	CODE
	6301E8GB0
	6301E8NB0

cable plug with dimmer

OPTIONAL

A60 LED E27 6W | gold mirror
phase-cut dim

	CODE
2200K | 400lm	9003E150
2700K | 500lm	9003E139

A60 LED E27 6W | silver mirror
phase-cut dim

	CODE
2700K | 500lm	9003E140

PRIVATE RESIDENCE BELGIUM

MIRRO

FLOOR SURFACE



2.0

LED G95 4-15W | E27
220-240VAC | 50-60Hz
aluminium | single side reflective
aluminium composite panel

3.30kg IP20

	CODE
	6311E8GB0
	6311E8NB0

cable plug with dimmer

OPTIONAL

G95 LED E27 6W | gold mirror
phase-cut dim

	CODE
2200K | 400lm	9003E151
2700K | 500lm	9003E142

G95 LED E27 6W | silver mirror
phase-cut dim

	CODE
2700K | 500lm	9003E149



3.0

LED G95 4-15W | E27
220-240VAC | 50-60Hz
aluminium | single side reflective
aluminium composite panel

3.70kg IP20

	CODE
	6312E8GB0
	6312E8NB0

cable plug with dimmer

OPTIONAL

G95 LED E27 6W | gold mirror
phase-cut dim

	CODE
2200K | 400lm	9003E151
2700K | 500lm	9003E142

G95 LED E27 6W | silver mirror
phase-cut dim

	CODE
2700K | 500lm	9003E149

PRIVATE RESIDENCE NETHERLANDS

DRO

CEILING SURFACE

p. 383





1.0

LED QT14 max. 5W | G9
220-240VAC | 50-60Hz
white/brown matt glass hand blown | aluminium powder coated

0.60kg IP20

CODE
1721G0WB0
1721G0YB0

2.0

LED C35 max. 6W | E14
220-240VAC | 50-60Hz
white/brown matt glass hand blown | aluminium powder coated

1.20kg IP20

CODE
1722C0WB0
1722C0YB0

3.0

LED A60 max. 12W | E27
220-240VAC | 50-60Hz
white/brown matt glass hand blown | aluminium powder coated

2.70kg IP20

CODE
1723E0WB0
1723E0YB0

brown on

brown off

Italian hand blown glass

OPTIONAL

QT14 LED 3.5W | phase-cut dim

CODE
3000K | 250lm 9010G804

more specs on page 730

OPTIONAL

C35 LED E14 6W opal | phase-cut dim

CODE
2700K | 450lm 9003C103

more lamps and specs on page 730

OPTIONAL

A60 LED E27 9W | phase-cut dim

CODE
2700K | 800lm 9003E152

more lamps and specs on page 730



Italian hand blown glass

DRO

CEILING SUSPENDED

p. 383

1.0

LED QT14 max. 5W | G9
220-240VAC | 50-60Hz
white/brown matt glass hand blown | aluminium powder coated black textile cable

0.70kg IP20

	CODE
	2521G0WB0
	2521G0YB0

OPTIONAL

QT14 LED 3.5W | phase-cut dim

	CODE
3000K | 250lm	9010G804

more specs on page 730



2.0

LED C35 max. 6W | E14
220-240VAC | 50-60Hz
white/brown matt glass hand blown | aluminium powder coated black textile cable

1.30kg IP20

	CODE
	2522C0WB0
	2522C0YB0

OPTIONAL

C35 LED E14 6W opal | phase-cut dim

	CODE
2700K | 450lm	9003C103

more lamps and specs on page 730



3.0

LED A60 max. 12W | E27
220-240VAC | 50-60Hz
white/brown matt glass hand blown | aluminium powder coated black textile cable with steel wire

2.70kg IP20

	CODE
	2523E0WB0
	2523E0YB0

OPTIONAL

A60 LED E27 9W opal | phase-cut dim

	CODE
2700K | 800lm	9003E152

more lamps and specs on page 730



4.0

LED A60 max. 15W | E27
220-240VAC | 50-60Hz
white/brown matt glass hand blown | aluminium powder coated black textile cable with steel wire

4.10kg IP20

	CODE
	2524E0WB0
	2524E0YB0

OPTIONAL

A60 LED E27 15W opal | phase-cut dim

	CODE
2700K | 1400lm	9003E153

more lamps and specs on page 730

OFFICE AUSY | ZAFA INTERIEURSTUDIO | GWENDY HERREMANS GENT | BELGIUM

OFFICE EDGAR & COOPER | BUREAU GODDEERIS ARCHITECTEN KORTRIJK | BELGIUM

PRIVATE RESIDENCE SWITZERLAND

DRO

WALL SURFACE

p. 383





1.0

LED QT14 max. 5W | G9
220-240VAC | 50-60Hz
white/brown matt glass hand blown | aluminium powder coated

0.60kg IP44

CODE

3431G0W0
3431G0Y0

2.0

LED C35 max. 6W | E14
220-240VAC | 50-60Hz
white/brown matt glass hand blown | aluminium powder coated

1.20kg IP44

CODE

3432C0W0
3432C0Y0

1.0 COMP

3x LED QT14 max. 5W | G9
220-240VAC | 50-60Hz
white/brown matt glass hand blown | aluminium powder coated
black textile cable

2.50kg IP20 35°/35°

CODE

3441G0WB0
3441G0YB0

cable plug with dimmer



brown on



brown off

Italian hand blown glass

OPTIONAL

QT14 LED 3.5W | phase-cut dim

CODE

3000K | 250lm 9010G804

more specs on page 730

OPTIONAL

C35 LED E14 6W opal | phase-cut dim

CODE

2700K | 450lm 9003C103

more lamps and specs on page 730

OPTIONAL

QT14 LED 3.5W | phase-cut dim

CODE

3000K | 250lm 9010G804

more specs on page 730

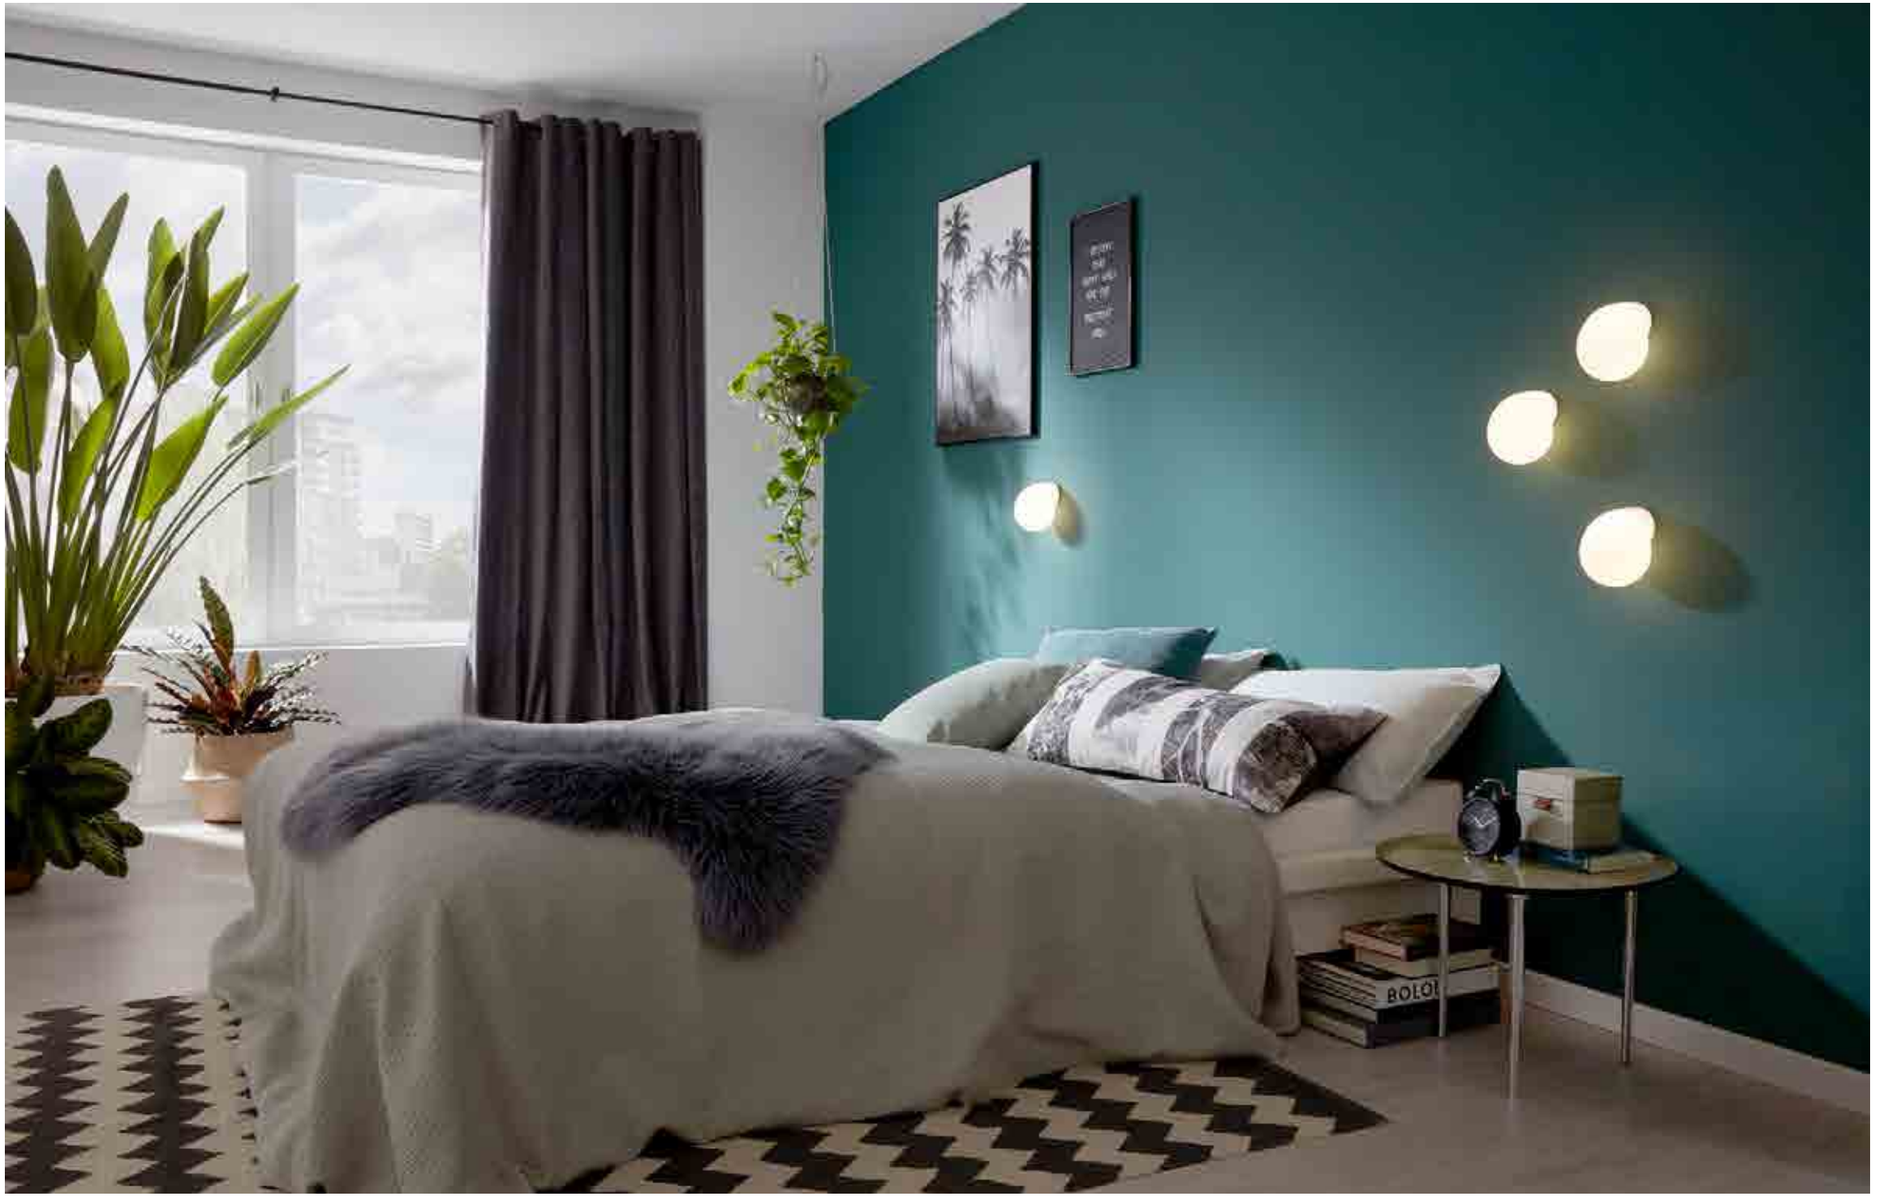

DRO

TABLE | FLOOR SURFACE

p. 383



Italian hand blown glass

1.0

LED QT14 max. 5W | G9
220-240VAC | 50-60Hz
white/brown matt glass hand blown | aluminium powder coated
black textile cable

0.75kg IP20

CODE

6421G0WB0
6421G0YB0

cable plug with switch

OPTIONAL

QT14 LED 3.5W | phase-cut dim

CODE

3000K | 250lm 9010G804

more specs on page 730



2.0

LED C35 4-6W | E14
220-240VAC | 50-60Hz
white/brown matt glass hand blown | aluminium powder coated
black textile cable

1.30kg IP20

CODE

6422C0WB0
6422C0YB0

cable plug with dimmer

OPTIONAL

C35 LED E14 6W opal | phase-cut dim

CODE

2700K | 450lm 9003C103

more lamps and specs on page 730

3.0

LED A60 4-12W | E27
220-240VAC | 50-60Hz
white/brown matt glass hand blown | aluminium powder coated
black textile cable

2.30kg IP20

CODE

6423E0WB0
6423E0YB0

cable plug with dimmer

OPTIONAL

A60 LED E27 9W | phase-cut dim

CODE

2700K | 800lm 9003E152

more lamps and specs on page 730

DRO

TABLE

p. 383

brown on

brown off

Italian hand blown glass



2.0

LED C35 4-6W| E14
220-240VAC | 50-60Hz
white/brown matt glass
hand blown | aluminium steel
powder coated | black textile cable

2.30kg IP20

CODE

6432C0WB0
6432C0YB0

cable plug with dimmer

OPTIONAL

C35 LED E14 6W opal | phase-cut dim

CODE

2700K | 450lm 9003C103

more lamps and specs on page 730



3.0

LED A60 4-12W | E27
220-240VAC | 50-60Hz
white/brown matt glass
hand blown | aluminium steel
powder coated | black textile cable

3.30kg IP20

CODE

6433E0WB0
6433E0YB0

cable plug with dimmer

OPTIONAL

A60 LED E27 9W | phase-cut dim

CODE

2700K | 800lm 9003E152

more lamps and specs on page 730

DRO

FLOOR SURFACE

p. 383

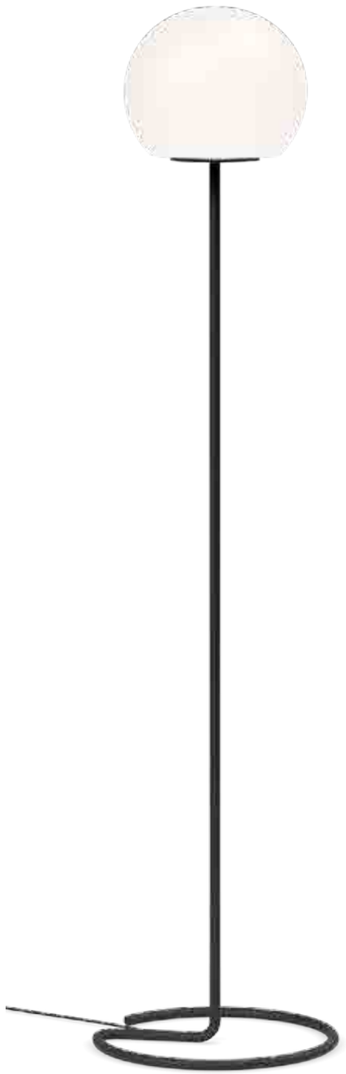

3.0

LED A60 4-12W | E27
220-240VAC | 50-60Hz
white/brown matt glass
hand blown | aluminium steel
powder coated | black textile cable

5.00kg IP20

	CODE
	6442E0WB0
	6442E0YB0

cable plug with dimmer



OPTIONAL

A60 LED E27 9W opal | phase-cut dim

	CODE
2700K | 800lm	9003E152

more lamps and specs on page 730



1.0 COMP

3x LED QT14 max. 5W | G9
220-240VAC | 50-60Hz
white/brown matt glass
hand blown | aluminium steel
powder coated | black textile cable

4.60kg IP20

	CODE
	6443G0WB0
	6443G0YB0

cable plug with dimmer



OPTIONAL

QT14 LED 3.5W | phase-cut dim

	CODE
3000K | 250lm	9010G804

more specs on page 730



Italian hand blown glass

PRIVATE RESIDENCE | WHISPERING BOLD INTERIOR DESIGN NETHERLANDS

4.0
W

4.0
D

Stone is a pure natural product, there may be deviations from the pictures in structure and colour.

13&9 DESIGN

ROCK

CEILING SUSPENDED



3.0

A60 max. 100W | E26-E27
220-240VAC | 50-60Hz
stone veneer | MDF lacquered
black textile cable

3-5kg IP20 0,3

Ø370mm	CODE
	2201E8W0
	2201E8D0

Ø560mm	CODE
	2203E8W0
	2203E8D0

Ø740mm	CODE
	2205E8W0
	2205E8D0

OPTIONAL

A60 LED E27 6W dim

	CODE
2200K | 315lm	9003E109
2700K | 500lm	9003E138

G95 LED E27 6W dim

2200K | 450lm	9003E111

G95 LED E27 12W phase-cut dim opal

2700K | 1000lm	9003E154

more lamps and specs on page 731



4.0

A60 max. 100W | E26-E27
220-240VAC | 50-60Hz
stone veneer | MDF lacquered
black textile cable

3.5-5.5kg IP20 0,3

Ø370mm	CODE
	2202E8W0
	2202E8D0

Ø560mm	CODE
	2204E8W0
	2204E8D0

Ø740mm	CODE
	2206E8W0
	2206E8D0

OPTIONAL

A60 LED E27 6W dim

	CODE
2200K | 315lm	9003E109
2700K | 500lm	9003E138

G95 LED E27 6W dim

2200K | 450lm	9003E111

G95 LED E27 12W phase-cut dim opal

2700K | 1000lm	9003E154

more lamps and specs on page 731

HAIRDRESSER ZEITGEIST GRAZ | AUSTRIA

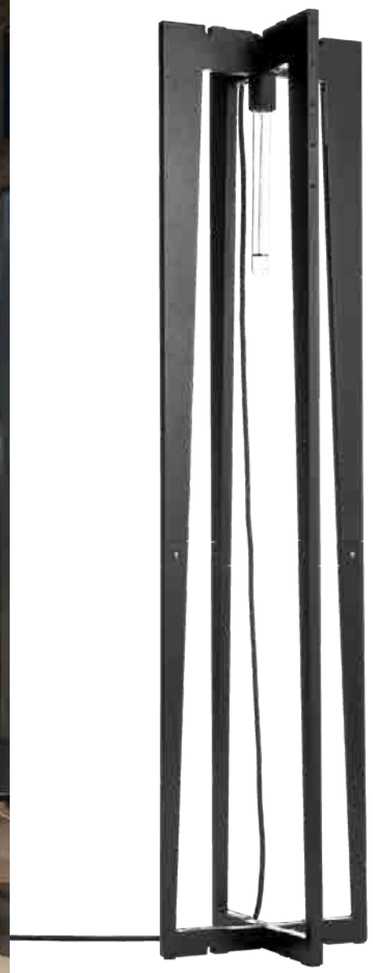

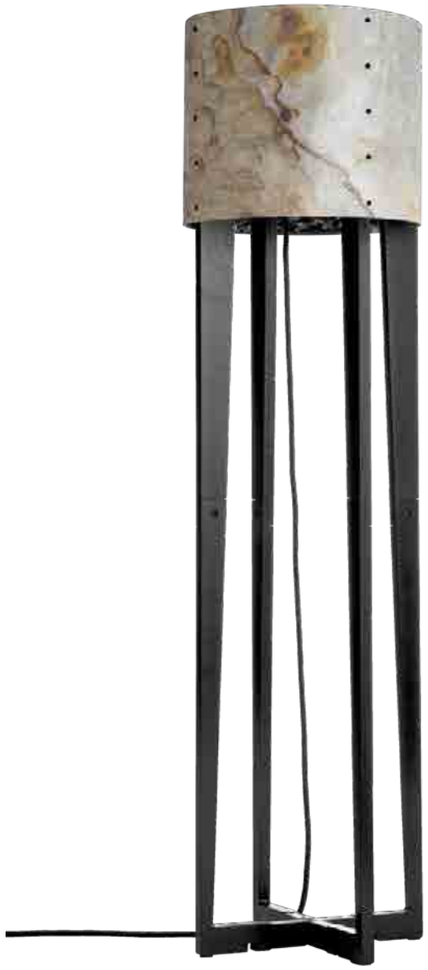

13&9 DESIGN

ROCK

FLOOR SURFACE



1.0 NAKED

LED A60 4-25W | E27
220-240VAC | 50-60Hz
MDF lacquered
black textile cable

5.00kg IP20

CODE

2223E800

cable plug with dimmer



OPTIONAL

T32-300 carbon filament E27 15W

	CODE
2200K | 50lm	9003E127

T30-300 LED E27 8W dim

	CODE
2200K | 550lm	9003E130
2700K | 550lm	9003E135

more lamps and specs on page 732



6.0

LED A60 4-25W | E27
220-240VAC | 50-60Hz
stone veneer | MDF lacquered
black textile cable

6.00kg IP20

CODE

2221E8W0
2221E8D0

cable plug with dimmer

OPTIONAL

A60 LED E27 6W dim

	CODE
2200K | 315lm	9003E109
2700K | 500lm	9003E138

G95 LED E27 6W dim

	CODE
2200K | 450lm	9003E111

G95 LED E27 12W phase-cut dim opal

	CODE
2700K | 1000lm	9003E154

more lamps and specs on page 731

back

WIRO GLOBE

WIRO DIAMOND

WIRO

WIRO INDUSTRY

MIX AND MATCH
weverducre.com/wiro

DESIGNER

“A design is good if it brings something new and timeless to the world.”

BERND STEINHUBER

And with WIRO, Bernd Steinhuber has accomplished exactly that. What is the greatest inspiration of this Austrian designer born in 1972? Simply put: Everything. That’s why his little sketchbook is his constant companion. “Ideas are fleeting,” he says, “and they don’t stick to office hours.” That’s an attitude we truly admire. After all, the most beautiful things are often found when you are not looking for them. So keep your eyes open.

Und das ist Bernd Steinhuber mit der WIRO auf jeden Fall gelungen. Wovon sich der 1972 geborene Designer am liebsten inspirieren lässt? Von allem, was ihm begegnet. Darum ist sein kleines Skizzenbuch auch sein steter Begleiter. „Ideen sind flüchtig und halten sich nicht an Bürozeiten.“ Eine Einstellung, die uns gut gefällt. Denn die schönsten Dinge findet man bekanntlich meist dann, wenn man nicht nach ihnen sucht. Also: Keep your eyes open.

RESTAURANT GRAAF VAN EGMONT AALST | BELGIUM

WIRO

SUSPENSION SYSTEM

HAVE A LOOK
weverducre.com/wiro-configurator

CEILING SURFACE BASE

E27 | aluminium powder coated
shade not included |

max. 2.25kg

	CODE
	90051025



SUSPENSION SINGLE

E27 | connector set for one shade
round ceiling base | black textile cable
shade not included |

for shades up to max. 2.25kg

		CODE
	2.6m	90015171
	6.0m	90015172

for shades above 2.25kg

		CODE
	2.6m	90015175
	6.0m	90015176



DECENTER 1.0

E27 | connector set for one shade
round ceiling base | black textile
cable | shade not included | 1 base +
1 end stop included | max 2.25kg |

	CODE
	90052050

6.0m suspension on page 740



DECENTER 2.0

E27 | connector set for two shades
round ceiling base | black textile cable
shades not included | 1 multibase
+ 2 end stops included
max 2.25kg per shade |

		CODE
	for 2	90052055

6.0m suspension on page 740



DECENTER 3.0-8.0

E27 | connector set for 3 to max. 8
shades | round ceiling base | black
textile cable | shades not included
2.6m | 1 multibase + 3-8 end stops
included | max 2.25kg per shade |

		CODE
	for 3	90052060
	for 4	90052067
	for 5	90052068
	for 6	90052069
	for 7	90052070
	for 8	90052071

6.0m suspension see page 740



PLUG AND PLAY

E27 LED 4-25W | connector set for
one shade | black textile cable | incl.
cable plug with dimmer | shade not
included | 2 cable brackets included
max 2.25kg |

	CODE
	90015165

cable plug with dimmer

BERND STEINHUBER

back

RESTAURANT DE DRIE FONTEINEN | TAILORMATE IN COOPERATION WITH ALKEN MAES VILVOORDE | BELGIUM

WIRO

CEILING SUSPENDED



1.8 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

1.15kg IP20

shade only

	CODE
	209200V0
	209200B0

OPTIONAL

A60 carbon filament E27 15W dim

	CODE
2200K | 50lm	9003E124

T32-180 carbon filament E27 15W dim

	CODE
2200K | 50lm	9003E106

T30-225 LED E27 6W dim

	CODE
2200K | 450lm	9003E129
2700K | 500lm	9003E136

more lamps and specs on page 732



2.0 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

0.35kg IP20

shade only

	CODE
	209600V0
	209600B0

OPTIONAL

A60 LED E27 6W dim

	CODE
2200K | 315lm	9003E109
2700K | 500lm	9003E138

A60 carbon filament E27 15W dim

	CODE
2200K | 50lm	9003E124

more lamps and specs on page 731



3.8 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

2.20kg IP20

shade only

	CODE
	209300V0
	209300B0

OPTIONAL

A60 LED E27 6W dim

	CODE
2200K | 315lm	9003E109
2700K | 500lm	9003E138

A60 carbon filament E27 15W dim

	CODE
2200K | 50lm	9003E124

T30-225 LED E27 6W dim

	CODE
2200K | 450lm	9003E129
2700K | 500lm	9003E136

more lamps and specs on page 731

ALWAYS USE

Ceiling surface base
aluminium powder coated
max. 2.25kg

	CODE
	90051025

Suspension single
connector set for one shade | max 2.25kg
round ceiling base | no steel wire

	CODE
2.6m	90015171
6.0m	90015172

more information on page 91

Plug and play | connector set for one shade | incl. cable plug with dimmer
max 2.25kg

	CODE
	90015165

Decenter 1.0-8.0
connector set for 1 to max. 8 shades
round ceiling base | 2.6m
max 2.25kg per shade

	CODE
for 1	90052050
for 2	90052055
for 3	90052060
for 4	90052067
for 5	90052068
for 6	90052069
for 7	90052070
for 8	90052071

BERND STEINHUBER

back

RESTAURANT AMATO KNOKKE | BELGIUM

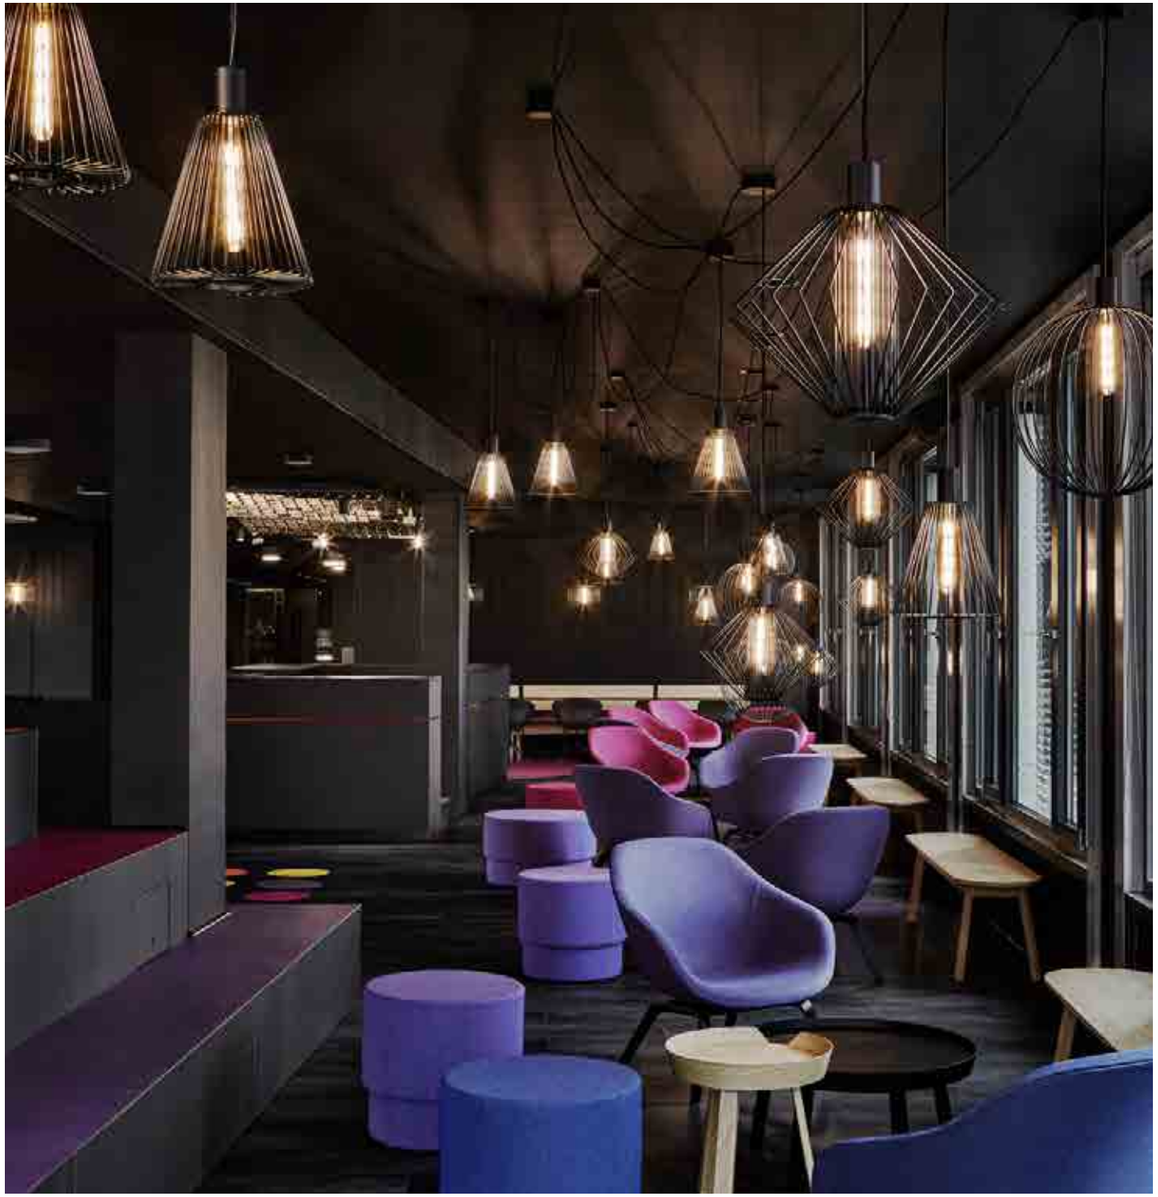

EMMA THE SLEEP COMPANY | VRAI INTERIOR ARCHITECTURE FRANKFURT AM MAIN | GERMANY

RESTAURANT MARCHÉ 17 TURNHOUT | BELGIUM

WIRO

CEILING SUSPENDED



6.1 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

2.70kg IP20 IS-0,3-D

shade only

	CODE
	209400V0
	209400B0

OPTIONAL

A60 LED E27 6W dim

	CODE
2200K | 315lm	9003E109
2700K | 500lm	9003E138

T30-300 LED E27 8W dim

	CODE
2200K | 550lm	9003E130
2700K | 550lm	9003E135

ST64 carbon filament E27 15W dim

	CODE
2200K | 50lm	9003E105

more lamps and specs on page 731



6.5 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

3.85kg IP20 IS-0,3-D

shade only

	CODE
	209500V0
	209500B0

OPTIONAL

A60 LED E27 6W dim

	CODE
2200K | 315lm	9003E109
2700K | 500lm	9003E138

T30-300 LED E27 8W dim

	CODE
2200K | 550lm	9003E130
2700K | 550lm	9003E135

T32-300 carbon filament E27 15W dim

	CODE
2200K | 50lm	9003E127

more lamps and specs on page 731

ALWAYS USE

Suspension single
connector set for one shade
round ceiling base | with steel wire

	CODE
2.6m	90015175
6.0m	90015176

more information on page 91

BERND STEINHUBER

back

OFFICE VIVESTE | STUDIO WESTGEEST | EIKELENBLOOM UTRECHT | NETHERLANDS

WIRO

CEILING SUSPENDED

As awarded by The Chicago Athenaeum: Museum of Architecture and Design

BERND STEINHUBER



1.0 DIAMOND

T30 | max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

2.82kg IP20

shade only

	CODE
	229100P0
	229100B0

OPTIONAL

T30-300 LED E27 8W dim

	CODE
2200K | 550lm	9003E130
2700K | 550lm	9003E135

T32-300 carbon filament E27 15W dim

	CODE
2200K | 50lm	9003E127

more lamps and specs on page 732



1.1 DIAMOND

T30 | max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

2.00kg IP20

shade only

	CODE
	244100P0
	244100B0

OPTIONAL

T30-300 LED E27 8W dim

	CODE
2200K | 550lm	9003E130
2700K | 550lm	9003E135

T32-300 carbon filament E27 15W dim

	CODE
2200K | 50lm	9003E127

more lamps and specs on page 732

ALWAYS USE

Ceiling surface base
aluminium powder coated
max. 2.25kg

	CODE
	90051025

Suspension single
connector set for one shade
round ceiling base | with steel wire

	CODE
2.6m	90015175
6.0m	90015176

more information on page 91

Plug and play | connector set for one shade | incl. cable plug with dimmer
max 2.25kg

	CODE
	90015165

Decenter 1.0-8.0
connector set for 1 to max. 8 shades
round ceiling base | 2.6m
max 2.25kg per shade

	CODE
for 1	90052050
for 2	90052055
for 3	90052060
for 4	90052067
for 5	90052068
for 6	90052069
for 7	90052070
for 8	90052071

back

RESIDENCE CYPRES | **LIGNE V** KNOKKE | BELGIUM

WIRO

CEILING SUSPENDED

As awarded by The Chicago Athenaeum: Museum of Architecture and Design



2.0 DIAMOND

T30 | max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

5.08kg IP20

shade only

	CODE
	229200P0
	229200B0

OPTIONAL

T30-300 LED E27 8W dim

	CODE
2200K | 550lm	9003E130
2700K | 550lm	9003E135

T32-300 carbon filament E27 15W dim

	CODE
2200K | 50lm	9003E127

more lamps and specs on page 732



3.0 DIAMOND

T30 | max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

6.50kg IP20

shade only

	CODE
	229300P0
	229300B0

OPTIONAL

T30-300 LED E27 8W dim

	CODE
2200K | 550lm	9003E130
2700K | 550lm	9003E135

T32-300 carbon filament E27 15W dim

	CODE
2200K | 50lm	9003E127

more lamps and specs on page 732



4.0 DIAMOND

T30 | max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

6.00kg IP20

shade only

	CODE
	229400P0
	229400B0

OPTIONAL

T30-300 LED E27 8W dim

	CODE
2200K | 550lm	9003E130
2700K | 550lm	9003E135

T32-300 carbon filament E27 15W dim

	CODE
2200K | 50lm	9003E127

more lamps and specs on page 732

ALWAYS USE

Suspension single
connector set for one shade
round ceiling base | with steel wire

	CODE
2.6m	90015175
6.0m	90015176

more information on page 91

copper
P

black
B

BERND STEINHUBER

back

RESTAURANT ENSO SUSHI & GRILL | DITTEL ARCHITEKTEN GMBH STUTTGART | GERMANY

OPTOMETRIST OPTIEK EVELINE | ATELIER EMTEE SCHELDEWINDEKE | BELGIUM

WIRO

CEILING SUSPENDED



1.0 INDUSTRY

T30 | max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

3.00kg IP20 S=0,3

shade only

	CODE
black	230100B0

OPTIONAL

T30-300 LED E27 8W dim

	CODE
2200K | 550lm	9003E130
2700K | 550lm	9003E135

T32-300 carbon filament E27 15W dim

	CODE
2200K | 50lm	9003E127

T32-180 carbon filament E27 15W dim

	CODE
2200K | 50lm	9003E106

more lamps and specs on page 732



2.0 INDUSTRY

T30 | max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

4.50kg IP20 S=0,3

shade only

	CODE
black	230200B0

OPTIONAL

T30-300 LED E27 8W dim

	CODE
2200K | 550lm	9003E130
2700K | 550lm	9003E135

T32-300 carbon filament E27 15W dim

	CODE
2200K | 50lm	9003E127

more lamps and specs on page 732

ALWAYS USE

Suspension single
connector set for one shade
round ceiling base | with steel wire

	CODE
2.6m	90015175
6.0m	90015176

more information on page 91

black
B

BERND STEINHUBER

back

SHOWROOM | GRANDO KEUKENS SINT-MARTENS-LATEM | BELGIUM

Rev. 001/2021-06

WIRO

CEILING SUSPENDED



1.0 GLOBE

T30 | max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

5.20kg IP20

shade only

	CODE
	228100R0
	228100B0

OPTIONAL

A60 LED E27 6W dim

	CODE
2200K | 315lm	9003E109
2700K | 500lm	9003E138

T30-300 LED E27 8W dim

	CODE
2200K | 550lm	9003E130
2700K | 550lm	9003E135

more lamps and specs on page 732



2.0 GLOBE

A60 max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

3.80kg IP20

shade only

	CODE
	228200B0

OPTIONAL

A60 LED E27 6W dim

	CODE
2200K | 315lm	9003E109
2700K | 500lm	9003E138

T30-300 LED E27 8W dim

	CODE
2200K | 550lm	9003E130
2700K | 550lm	9003E135

more lamps and specs on page 732



3.0 GLOBE

A60 max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

2.30kg IP20

shade only

	CODE
	228300B0

OPTIONAL

A60 LED E27 6W dim

	CODE
2200K | 315lm	9003E109
2700K | 500lm	9003E138

ST64 LED E27 6W dim

	CODE
2200K | 450lm	9003E110

more lamps and specs on page 731

ALWAYS USE

Suspension single
connector set for one shade
round ceiling base | with steel wire

	CODE
2.6m	90015175
6.0m	90015176

more information on page 91

BERND STEINHUBER

back

SHOWROOM | GRANDO KEUKENS BRUGGE | BELGIUM

WIRO

CEILING SUSPENDED

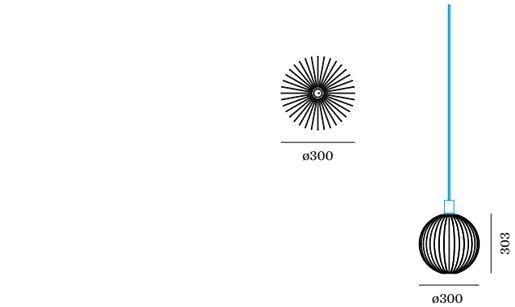

4.0 GLOBE

T30 | max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

1.30kg IP20

shade only

	CODE
	243100V0
	243100B0

OPTIONAL

T30-225 LED E27 6W dim

	CODE
2200K | 450lm	9003E129
2700K | 500lm	9003E136

T32-180 carbon filament E27 15W dim

	CODE
2200K | 50lm	9003E106

more lamps and specs on page 732

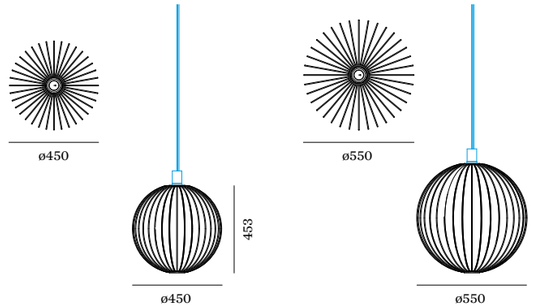

5.0 GLOBE

T30 | max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

2.70kg IP20

shade only

	CODE
	243200V0
	243200B0

OPTIONAL

T30-300 LED E27 8W dim

	CODE
2200K | 550lm	9003E130
2700K | 550lm	9003E135

T32-300 carbon filament E27 15W dim

	CODE
2200K | 50lm	9003E127

more lamps and specs on page 732



6.0 GLOBE

T30 | max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

3.30kg IP20

shade only

	CODE
	243300V0
	243300B0

OPTIONAL

T30-300 LED E27 8W dim

	CODE
2200K | 550lm	9003E130
2700K | 550lm	9003E135

T32-300 carbon filament E27 15W dim

	CODE
2200K | 50lm	9003E127

more lamps and specs on page 732

ALWAYS USE

Ceiling surface base
aluminium powder coated
max. 2.25kg

	CODE
	90051025

Suspension single
connector set for one shade
round ceiling base | with steel wire

	CODE
2.6m	90015175
6.0m	90015176

more information on page 91

Plug and play | connector set for one shade | incl. cable plug with dimmer
max 2.25kg

	CODE
	90015165

Decenter 1.0-8.0
connector set for 1 to max. 8 shades
round ceiling base | 2.6m
max 2.25kg per shade

	CODE
for 1	90052050
for 2	90052055
for 3	90052060
for 4	90052067
for 5	90052068
for 6	90052069
for 7	90052070
for 8	90052071

BERND STEINHUBER

back

PRIVATE RESIDENCE | MARKEY & SCHELSTRAETE BELGIUM

BERND STEINHUBER

WIRO

CEILING SUSPENDED



1.0 CONE

T30 | max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

1.00kg IP20

shade only

	CODE
	245100V0
	245100B0

OPTIONAL

T30-225 LED E27 6W dim

	CODE
2200K | 450lm	9003E129
2700K | 500lm	9003E136

T32-180 carbon filament E27 15W dim

	CODE
2200K | 50lm	9003E106

A60 LED E27 6W dim

	CODE
2200K | 315lm	9003E109

A60 carbon filament E27 15W dim

	CODE
2200K | 50lm	9003E124

more lamps and specs on page 732

ALWAYS USE

Ceiling surface base
aluminium powder coated
max. 2.25kg

	CODE
	90051025

Suspension single
connector set for one shade | max 2.25kg
round ceiling base | no steel wire

	CODE
2.6m	90015171
6.0m	90015172

more information on page 91

Plug and play | connector set for one shade | incl. cable plug with dimmer
max 2.25kg

	CODE
	90015165

Decenter 1.0-8.0
connector set for 1 to max. 8 shades
round ceiling base | 2.6m
max 2.25kg per shade

	CODE
for 1	90052050
for 2	90052055
for 3	90052060
for 4	90052067
for 5	90052068
for 6	90052069
for 7	90052070
for 8	90052071

back

PRIVATE RESIDENCE GERMANY

wall mounting

wall mounting cable plug with dimmer

WIRO

WALL SURFACE



1.0 CONE

T30 | E27 | 220-240VAC | 50-60Hz
varnished steel | lacquered

1.00kg IP20

shade only

	CODE
	245100V0
	245100B0

OPTIONAL

T30-225 LED E27 6W

	CODE
2200K | 450lm	9003E129
2700K | 500lm	9003E136

T32-180 carbon filament E27 15W

	CODE
2200K | 50lm	9003E106

more lamps and specs on page 732



1.1 DIAMOND

T30 | E27 | 220-240VAC | 50-60Hz
varnished steel | lacquered

2.00kg IP20

shade only

	CODE
	244100P0
	244100B0

OPTIONAL

T30-300 LED E27 8W

	CODE
2200K | 550lm	9003E130
2700K | 550lm	9003E135

T32-300 carbon filament E27 15W

	CODE
2200K | 50lm	9003E127

more lamps and specs on page 732



4.0 GLOBE

T30 | E27 | 220-240VAC | 50-60Hz
varnished steel | lacquered

1.30kg IP20

shade only

	CODE
	243100V0
	243100B0

OPTIONAL

T30-225 LED E27 6W

	CODE
2200K | 450lm	9003E129
2700K | 500lm	9003E136

T32-180 carbon filament E27 15W

	CODE
2200K | 50lm	9003E106

more lamps and specs on page 732

ALWAYS USE

Wall mounting
max. 60W

		CODE
	short	90056080
	long	90056090



Wall mounting
cable plug with dimmer
LED 4-25W

		CODE
	short	90056085
	long	90056095





black + copper PB

black + rust VB

black + black BB

PRIVATE RESIDENCE | MARKEY & SCHELSTRAETE BELGIUM

BERND STEINHUBER



1.0 DIAMOND

T30 | LED 4-25W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

2.90kg IP20

	CODE
	6603E8PB0
	6603E8BB0

cable plug with dimmer

OPTIONAL

T30-225 LED E27 6W dim

	CODE
2200K | 450lm	9003E129
2700K | 500lm	9003E136

T32-180 carbon filament E27 15W dim

	CODE
2200K | 50lm	9003E106

more lamps and specs on page 732



1.0 GLOBE

T30 | LED 4-25W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

2.20kg IP20

	CODE
	6601E8VB0
	6601E8BB0

cable plug with dimmer

OPTIONAL

T30-225 LED E27 6W dim

	CODE
2200K | 450lm	9003E129
2700K | 500lm	9003E136

T32-180 carbon filament E27 15W dim

	CODE
2200K | 50lm	9003E106

more lamps and specs on page 732



2.0 GLOBE

T30 | LED 4-25W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

3.20kg IP20

	CODE
	6602E8VB0
	6602E8BB0

cable plug with dimmer

OPTIONAL

T30-300 LED E27 8W dim

	CODE
2200K | 550lm	9003E130
2700K | 550lm	9003E135

T32-300 carbon filament E27 15W dim

	CODE
2200K | 50lm	9003E127

more lamps and specs on page 732

WIRO

FLOOR SURFACE

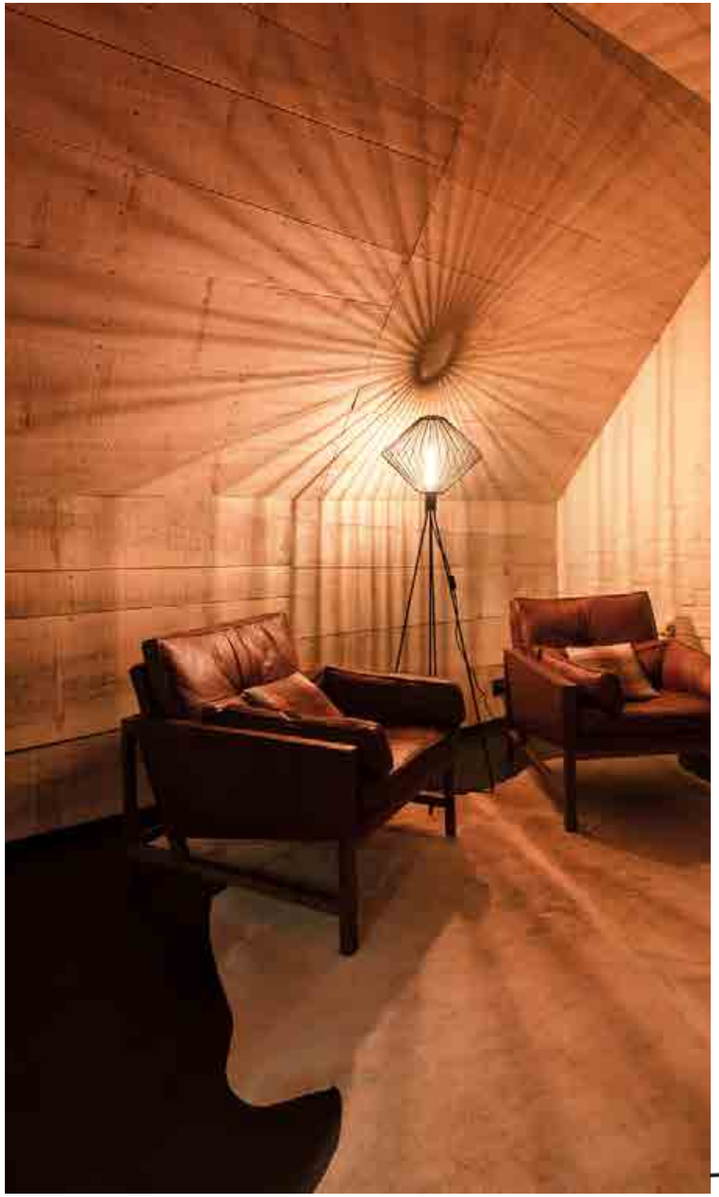



1.0 DIAMOND

T30 | LED 4-25W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

5.40kg IP20

	CODE
	6614E8PB0
	6614E8BB0

cable plug with dimmer



OPTIONAL

T30-225 LED E27 6W dim

	CODE
2200K | 450lm	9003E129
2700K | 500lm	9003E136

T32-180 carbon filament E27 15W dim

	CODE
2200K | 50lm	9003E106

more lamps and specs on page 732



1.0 GLOBE

T30 | LED 4-25W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

6.10kg IP20

	CODE
	6611E8VB0
	6611E8BB0

cable plug with dimmer



OPTIONAL

T30-300 LED E27 8W dim

	CODE
2200K | 550lm	9003E130
2700K | 550lm	9003E135

T32-300 carbon filament E27 15W dim

	CODE
2200K | 50lm	9003E127

more lamps and specs on page 732



2.0 GLOBE

T30 | LED 4-25W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

6.70kg IP20

	CODE
	6612E8VB0
	6612E8BB0

cable plug with dimmer



OPTIONAL

T30-300 LED E27 8W dim

	CODE
2200K | 550lm	9003E130
2700K | 550lm	9003E135

T32-300 carbon filament E27 15W dim

	CODE
2200K | 50lm	9003E127

more lamps and specs on page 732

PRIVATE RESIDENCE BELGIUM

BERND STEINHUBER

back

J.J.W. 05

J.J.W. 042

J.J.W. 02

CURIOUS?
weverducre.com/jjw

DESIGNER

“You can learn new things from old ones.”

JULES WABBES

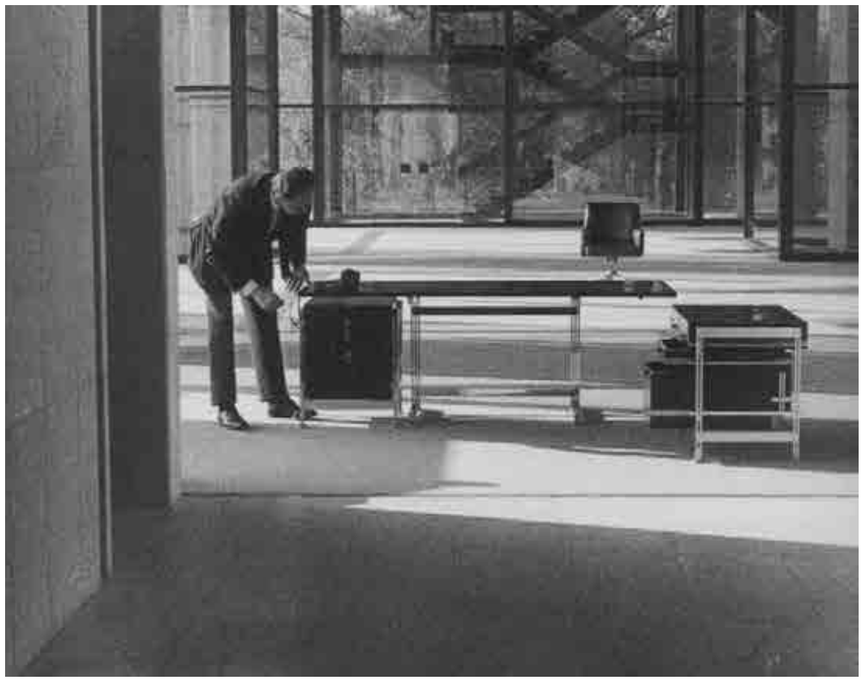

Jules Wabbes with one of his desks at the Royale Belge, Brussels, 1971, © Wabbes Sofam, Brussels, 2017.

Jules Wabbes (1919–1974), who had a penchant for finding new ideas at flea markets, must have had the same thought. It’s no wonder people said that the Belgian architect and furniture designer had a unique eye for shapes and materials. And that is apparent in his countless designs, which still haven’t gone out of fashion even today. A shining example is the chandelier, developed in the 1970s, whose futuristic, floral form is as much at home in a modern bar as in a posh hotel lobby.

So oder so ähnlich könnte Jules Wabbes (1919–1974) gedacht haben, der sich gerne auf Flohmärkten inspirieren ließ. Kein Wunder, dass man dem belgischen Architekten und Möbeldesigner einen ganz besonderen Blick für Formen und Materialien nachsagte. Dieser manifestiert sich in seinen zahlreichen Entwürfen, die bis heute nicht aus der Mode gekommen sind. Bestes Beispiel: Ein in den 1970er Jahren entworfener Kronleuchter, dessen futuristische, florale Form sich damals wie heute gleichermaßen perfekt in moderne Bars und edle Hotel-Lobbys einfügt.

PARKHOTEL KORTRIJK | BELGIUM

J.J.W.

WALL SURFACE



01

2x A60 max. 53W | E27
220-240VAC | 50-60Hz
aluminium lacquered

2.92kg IP20

	CODE
	2054E8S0
	2054E8G0

OPTIONAL

A60 LED E27 6W | phase-cut dim

	CODE
2200K | 315lm	9003E109
2700K | 500lm	9003E138

more lamps and specs on page 731

JULES WABBES

back

RESTAURANT MISMO | FUTURE LIVING DIEGEM | BELGIUM

JULES WABBES

back

J.J.W.

WALL SURFACE

02

A60 max. 53W | E27
220-240VAC | 50-60Hz
aluminium lacquered

1.02kg IP20

	CODE
	2055E8S0
	2055E8G0

OPTIONAL

A60 LED E27 6W | phase-cut dim

	CODE
2200K | 315lm	9003E109
2700K | 500lm	9003E138

more lamps and specs on page 731

PRIVATE RESIDENCE AUSTRIA

HAIRDRESSER TON SUR TON | SIMON DE BACKERE KORTRIJK | BELGIUM

OFFICE PROWINKO | CONIX RDBM ARCHITECTS BRUSSELS | BELGIUM

JULES WABBES

back

J.J.W.

CEILING SURFACE



03

3x A60 max. 53W | E27
220-240VAC | 50-60Hz
aluminium lacquered

4.00kg IP20

	CODE
	2051E8S0
	2051E8G0

OPTIONAL

A60 LED E27 6W | phase-cut dim

	CODE
2200K | 315lm	9003E109
2700K | 500lm	9003E138

more lamps and specs on page 731

HAIRDRESSER TON SUR TON | SIMON DE BACKERE KORTRIJK | BELGIUM

JULES WABBES

J.J.W.

CEILING SUSPENDED



04

6x A60 max. 53W | E27
220-240VAC | 50-60Hz
aluminium lacquered

4.50kg IP20

	CODE
	2052E8S0
	2052E8G0

OPTIONAL

A60 LED E27 6W | phase-cut dim

	CODE
2200K | 315lm	9003E109
2700K | 500lm	9003E138

more lamps and specs on page 731



042

6x A60 max. 53W | E27
220-240VAC | 50-60Hz
aluminium lacquered

8.10kg IP20

	CODE
	2056E8S0
	2056E8G0

OPTIONAL

A60 LED E27 6W | phase-cut dim

	CODE
2200K | 315lm	9003E109
2700K | 500lm	9003E138

more lamps and specs on page 731

back

PRIVATE RESIDENCE | PETER PLAN BELGIUM

JULES WABBES

back

J.J.W.

CEILING SUSPENDED



05

3x A60 max. 53W | E27
220-240VAC | 50-60Hz
aluminium lacquered

8.50kg IP20

	CODE
	2053E8S0
	2053E8G0

OPTIONAL

A60 LED E27 6W | phase-cut dim

	CODE
2200K | 315lm	9003E109
2700K | 500lm	9003E138

more lamps and specs on page 731

ONE IDEA

ENDLESS VARIATIONS

I bet you think they're sweet. They are. REVER's delicate pastel shades are real eye candy, and not just for Sixties fans. The multifunctional luminaire was designed by the Italian designer Marcello Ziliani, who was inspired by the lapels typical of the time. The result is a unique product in both design and material. What looks like frosted glass is a special polycarbonate moulded in a single casting. This makes REVER a highlight in terms of stability. Regardless of whether they are wall, ceiling, floor, or table luminaires. By the way, if you like things colourful, combine up to five distinct luminaire fixtures with six different aluminium details and trays. It couldn't be more customisable.

Ooch - sind die süß, werden Sie jetzt denken. Stimmt. Denn die zarten Pastelltöne von REVER sind nicht nur für Sixties-Fans echter „Eyecandy". Entworfen wurde die multifunktionale Leuchte vom italienischen Designer Marcello Ziliani, der sich von den typischen Reversformen der Zeit inspirieren ließ. Das Ergebnis ist ein Produkt, das nicht nur durch sein Design, sondern auch durch das verwendete Material absolut einzigartig ist. Was wie Milchglas aussieht, ist nämlich ein spezielles Polycarbonat, das in nur einem Guss geformt wird. Das macht REVER auch in puncto Stabilität zu einem echten Highlight. Ganz egal, ob man sie als Wand-, Decken-, Steh- oder Tischleuchte einsetzt. Übrigens: Wer´s gerne bunt mag, kann bis zu fünf unterschiedliche Leuchtenkörper mit sechs verschiedenen Aluminiumdetails und Trays kombinieren. Individueller geht´s nicht.

SHADE COLOUR | LAMP BODY

TRAY COLOUR | MOUNTING DETAIL

MIX AND MATCH
weverducre.com/rever

back

DESIGNER

“Designing luminaires is a very niche art.”

MARCELLO ZILIANI

MORE INFO
weverducre.com/rever

Wever & Ducré teamed up with renowned designer Marcello Ziliani, who created an eclectic collection of luminaires that skilfully combines timeless design with functionality. The lapels of men’s jackets served as a model for the diffusers’ shape. The lamp body is composed of a single piece of injection-moulded polycarbonate. Inspired by delicate linens, the surface texture is achieved by complex, cutting-edge laser technology. Sounds good? Then you’ll also be happy to hear that the REVER collection is available in a variety of colours and finishes, making it a perfect fit for every lobby. And, of course, for every hotel room, too.

In Zusammenarbeit mit dem renommierten italienischen Designer Marcello Ziliani realisierte Wever & Ducré eine eklektische Leuchtenserie, die gekonnt zeitloses Design mit Funktionalität verbindet. Modernste Lasertechnologien verleihen der Oberfläche ihre zarte, von Leinen inspirierte Struktur. Der elegante Leuchtenkörper erinnert an ein Herrenanzugrevers. Klingt gut? Dann freut es Sie sicher auch zu hören, dass die REVER-Kollektion in ihrer Vielzahl an Farb- und Oberflächen-Kombinationen perfekt in jede Lobby passt. Und natürlich auch in jedes Hotelzimmer.

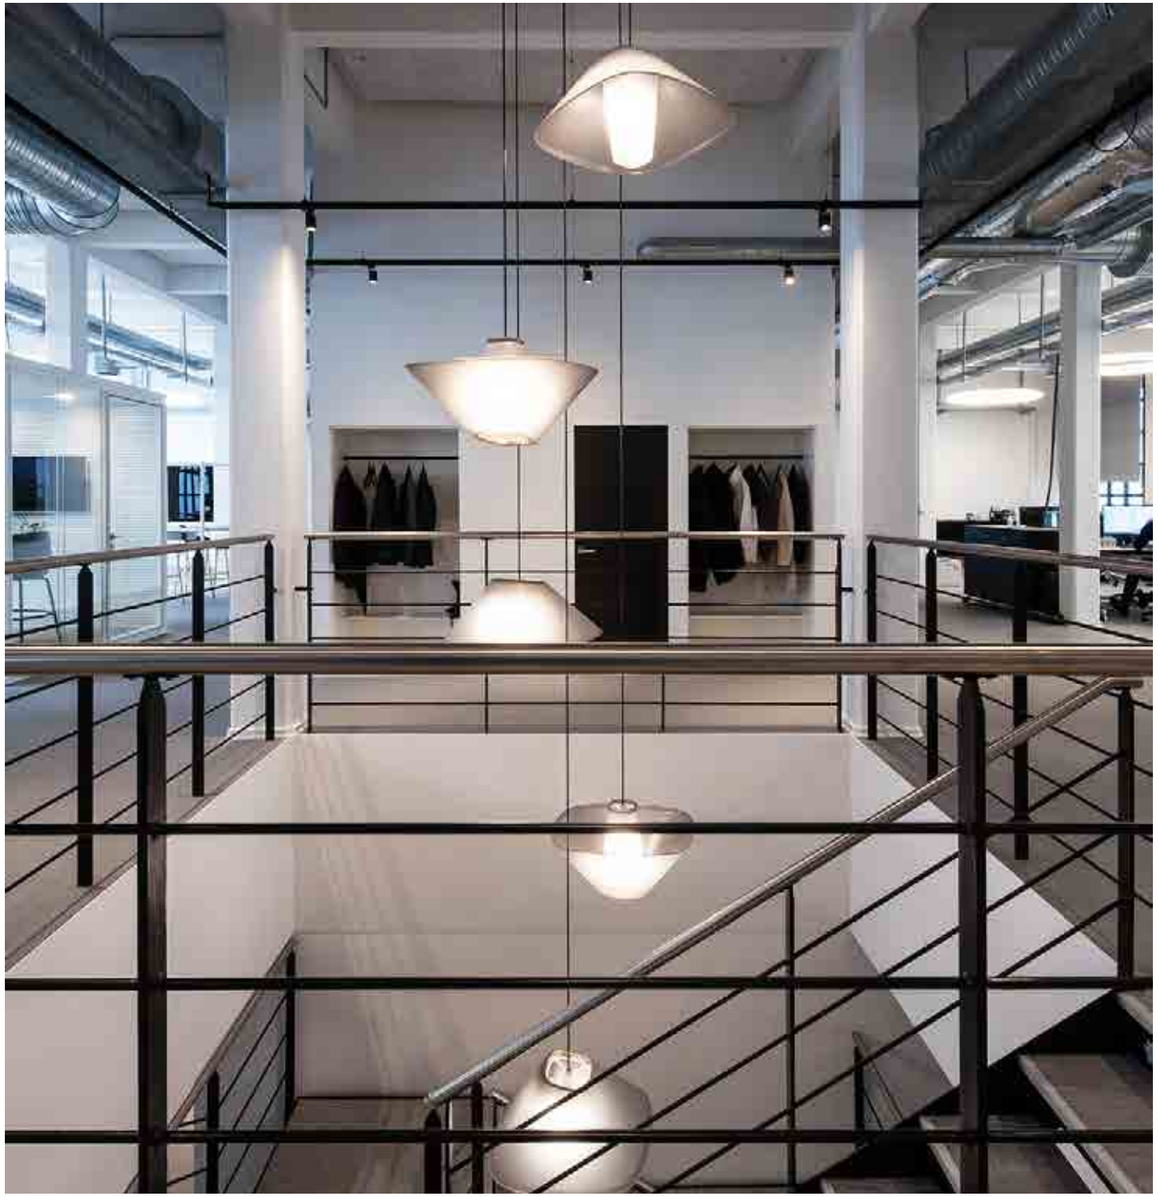

COLLIERS INTERNATIONAL | ARCHITECT HELLE NØHR | ANKER & CO KOPENHAGEN | DENMARK

mounting detail chrome





REVER

CEILING SUSPENDED

1.0

LED A60 max. 15W | E27
metalised or painted ABS
polycarbonate | hanging in
both ways

3.50kg IP20

lamp body

	CODE
	6521ETG_ _
	6521ESG_ _
	6521ECW_ _
	6521EAY_ _
	6521EHR_ _

mounting detail

	CODE
	C_
	N_
	G_
	P_
	W_
	B_

cable colour

	CODE
	_ W
	_ B

6.0m cable available on request

OPTIONAL

A60 LED E27 15W | phase-cut dim

	CODE
2700K | 1400lm	9003E153

MARCELLO ZILIANI

back

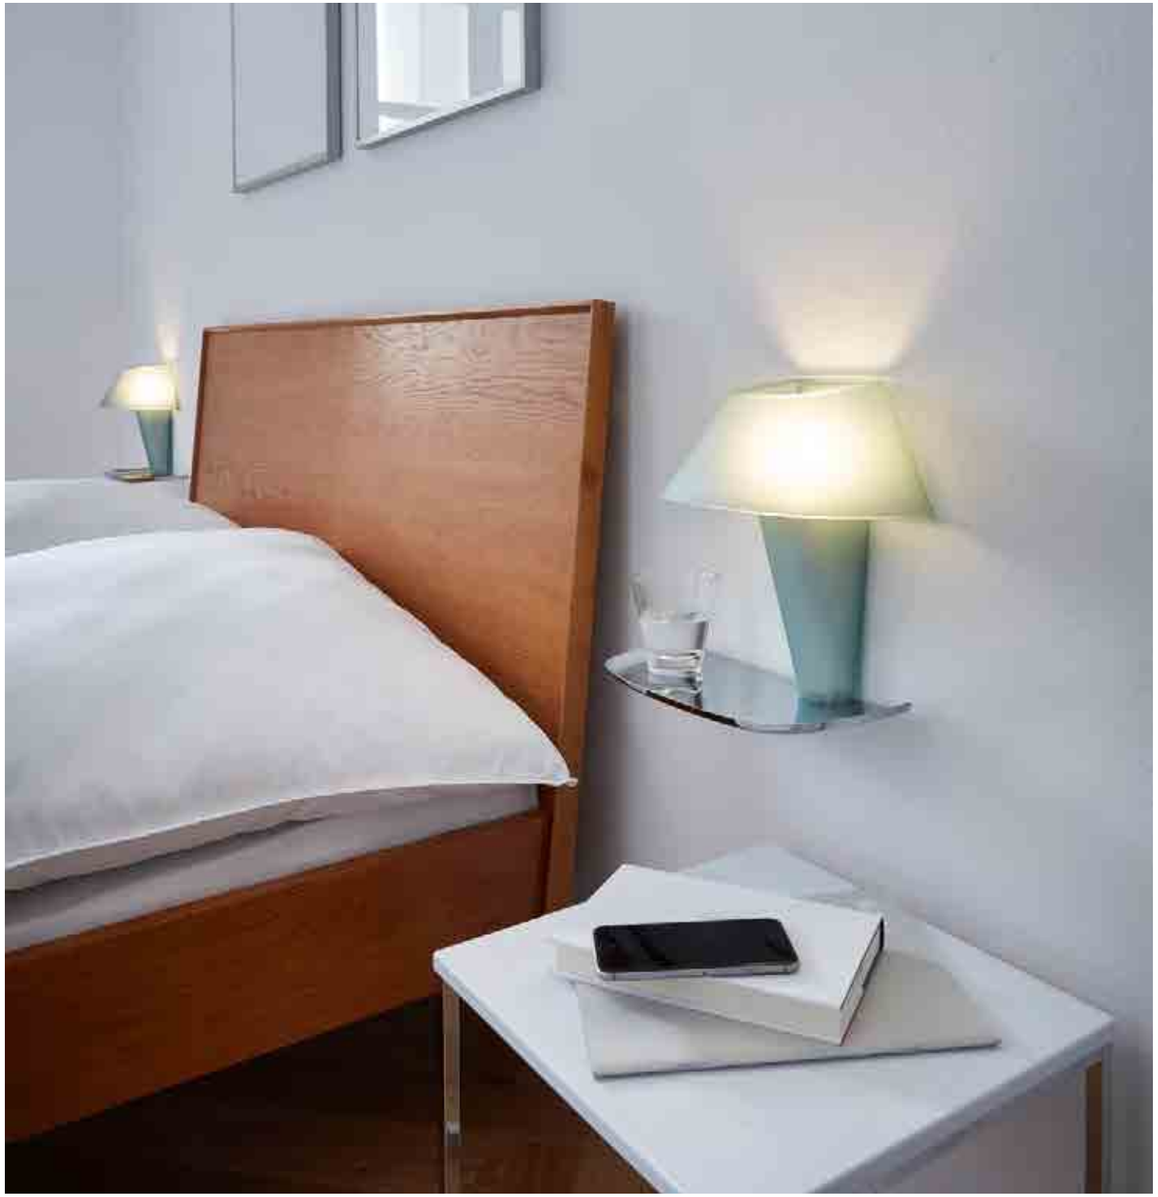

REVER

WALL SURFACE



1.0

LED C35 or P25 max. 6W | E14
220-240VAC | 50-60Hz
plated or powder coated steel
polycarbonate

1.00kg IP20

lamp body

CODE
6511CTG_
6511CSG_
6511CCW_
6511CAY_
6511CHR_

tray colours

CODE
C
N
G
P
W
B



1.1

LED C35 or P25 4-6W | E14
220-240VAC | 50-60Hz
plated or powder coated steel
polycarbonate

1.10kg IP20

lamp body

CODE
6511CTG_ _
6511CSG_ _
6511CCW_ _
6511CAY_ _
6511CHR_ _

tray colours

CODE
C_
N_
G_
P_
W_
B_

Cable Plug Colours
cable plug with dimmer

CODE
_ W
_ B

OPTIONAL

C35 LED E14 6W opal | phase-cut dim

	CODE
2700K | 450lm	9003C103

PRIVATE RESIDENCE GERMANY

REVER

WALL SURFACE



2.0

LED C35 or P25 max. 6W | E14
220-240VAC | 50-60Hz
plated or powder coated steel
polycarbonate

0.70kg IP20

lamp body

CODE
6512CTG_
6512CSG_
6512CCW_
6512CAY_
6512CHR_

mounting detail

CODE
C
N
G
P
W
B

2.1

LED C35 or P25 4-6W | E14
220-240VAC | 50-60Hz
plated or powder coated steel
polycarbonate

0.80kg IP20

lamp body

CODE
6512CTG__
6512CSG__
6512CCW__
6512CAY__
6512CHR__

mounting detail

CODE
C_
N_
G_
P_
W_
B_

Cable Plug Colours
cable plug with dimmer

CODE
_W
_B

100 1000

OPTIONAL

C35 LED E14 6W opal | phase-cut dim

	CODE
2700K | 450lm	9003C103

MARCELLO ZILIANI

back

PRIVATE RESIDENCE GERMANY

REVER

TABLE

As awarded by The Chicago Athenaeum: Museum of Architecture and Design

MARCELLO ZILIANI



1.0

LED A60 4-12W | E27
220-240VAC | 50-60Hz
plated or powder coated steel
polycarbonate

1.50kg IP20

lamp body

	CODE
	6501ETG_
	6501ESG_
	6501ECW_
	6501EAY_
	6501EHR_

tray colours

	CODE
	C
	N
	G
	P
	W
	B

black cable plug with dimmer
for white tray white cable





2.0

LED A60 4-12W | E27
220-240VAC | 50-60Hz
plated or powder coated steel
polycarbonate

1.10kg IP20 12

lamp body

	CODE
	6502ETG_
	6502ESG_
	6502ECW_
	6502EAY_
	6502EHR_

mounting detail

	CODE
	C

black cable plug with dimmer

OPTIONAL

A60 LED E27 9W | phase-cut dim

	CODE
2700K | 800lm	9003E152

back

PRIVATE RESIDENCE GERMANY

CA TORESELE | **MATTEO AZZOLINI** VERONA | ITALY

white
W

bronze
Q

black
B

MARCELLO ZILIANI

REVER DINING

TABLE

As awarded by The Chicago Athenaeum:
Museum of Architecture and Design



1.0

LED 2.5W | touch dim
magnetic pole with optional base
rechargeable li-ion battery
incl. 1.5m USB charging cable
lights up to 8 hours | powder
coated zink alloy | PMMA

0.80kg IP23

lamp body

	CODE
	655184Q_
	655184B_

LIGHT COLOUR	LUMEN	CRI	CODE
2200K	115	>80	1

lamp body

	CODE
	655184Q_
	655184W_
	655184B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	135	>80	2

OPTIONAL

multiple charging tray | up to 4 fixtures

	CODE
	90018007

ALWAYS USE

flat metal plate to add to REVER DINING with magnetic fixation suitable to put under the table cloth

plate colours

	CODE
	90019163
	90019164

single metal charging tray to add to REVER DINING with magnetic fixation

tray colours

	CODE
	90019175
	90019165
	90019166

back

PARKHOTEL KORTRIJK | BELGIUM

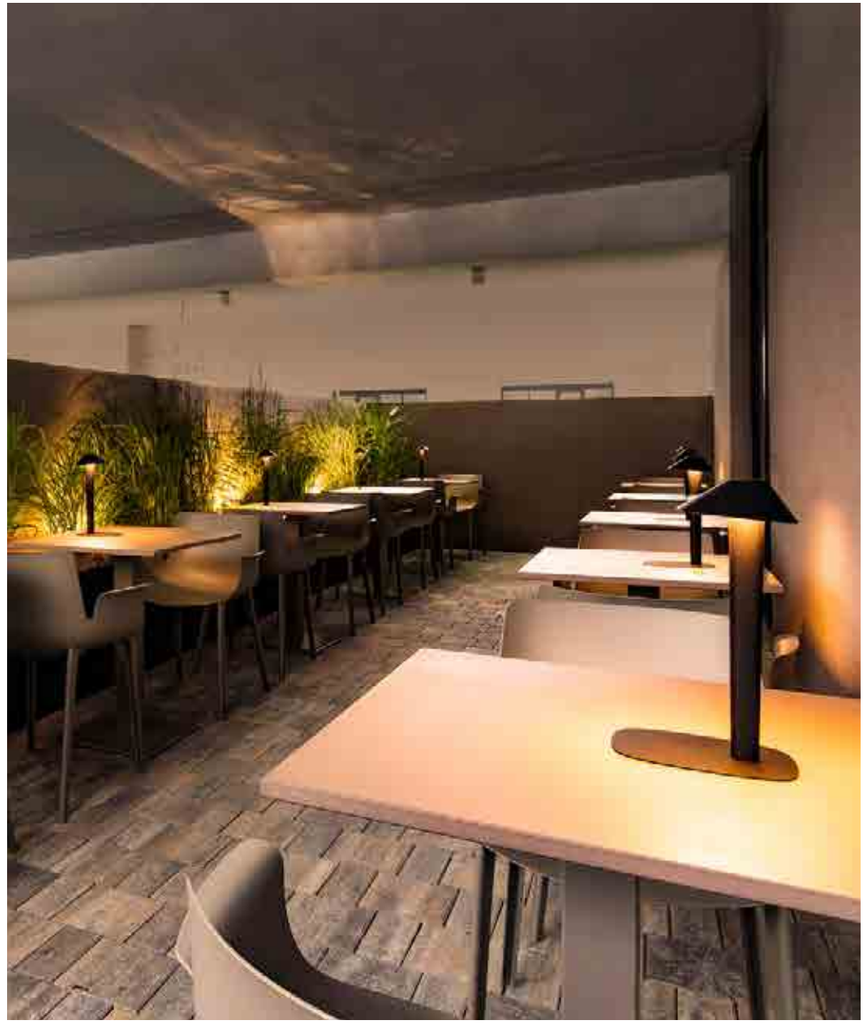

RESTAURANT FREIGEIST BRAUQUARTIER | FIPE ARCHITECTS GRAZ | AUSTRIA

PRIVATE RESIDENCE AUSTRIA

MARCELLO ZILIANI

back

REVER DINING

TABLE

As awarded by The Chicago Athenaeum: Museum of Architecture and Design



2.0

LED 2W | 220-20VAC | 50-60Hz
PCB 3-step | zink alloy powder coated | PMMA | touch dim

0.93kg IP23

	CODE
	655284W_
	655284Q_
	655284B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	135	>80	2

black cable plug with integrated driver
white cable for white tray



PRIVATE RESIDENCE GERMANY

REVER

FLOOR SURFACE



1.0 XS

LED A60 max. 12W | E27
220-240VAC | 50-60Hz | plated
powder coated steel | polycarbonate

4.70kg IP20

lamp body

	CODE
	6531ETG_
	6531ESG_
	6531ECW_
	6531EAY_
	6531EHR_

mounting detail

	CODE
	C
	N
	G
	P
	W
	B

black cable plug with dimmer
for white tray white cable



OPTIONAL

A60 LED E27 9W | phase-cut dim

	CODE
2700K | 800lm	9003E152



1.0 S

LED A60 max. 12W | E27
220-240VAC | 50-60Hz | plated
powder coated steel | polycarbonate

5.00kg IP20

lamp body

	CODE
	6532ETG_
	6532ESG_
	6532ECW_
	6532EAY_
	6532EHR_

mounting detail

	CODE
	C
	N
	G
	P
	W
	B

black cable plug with dimmer
for white tray white cable



OPTIONAL

A60 LED E27 9W | phase-cut dim

	CODE
2700K | 800lm	9003E152



1.0 M

LED A60 max. 12W | E27
220-240VAC | 50-60Hz | plated
powder coated steel | polycarbonate

5.30kg IP20

lamp body

	CODE
	6533ETG_
	6533ESG_
	6533ECW_
	6533EAY_
	6533EHR_

mounting detail

	CODE
	C
	N
	G
	P
	W
	B

black cable plug with dimmer
for white tray white cable



OPTIONAL

A60 LED E27 9W | phase-cut dim

	CODE
2700K | 800lm	9003E152



1.0 L

LED A60 max. 12W | E27
220-240VAC | 50-60Hz | plated
powder coated steel | polycarbonate

5.40kg IP20

lamp body

	CODE
	6534ETG_
	6534ESG_
	6534ECW_
	6534EAY_
	6534EHR_

mounting detail

	CODE
	C
	N
	G
	P
	W
	B

black cable plug with dimmer
for white tray white cable



OPTIONAL

A60 LED E27 9W | phase-cut dim

	CODE
2700K | 800lm	9003E152

MARCELLO ZILIANI

back

CEILING RECESSED

p. 161 — 257

CEILING RECESSED SPOTLIGHTS

DEEP BIJOU
p. 165

DEEP PETIT
p. 167

DEEP
p. 169

DEEPER
p. 171

DEEP ADJUST PETIT
p. 173

DEEP ADJUST
p. 175

DEEP ADJUST TRIMLESS
p. 179

DEEP ASYM ADJUST
p. 181

DEEP ADJUST FORT
p. 183

SPINEO
p. 185

RONY
p. 187

PIRRO
p. 189

NOP PETIT
p. 193

NOP
p. 195



RON
p. 197



PLANO PETIT
p. 201

PLANO
p. 203



PLANO ADJUST FORT
p. 205

STRANGE PETIT
p. 207

STRANGE
p. 209



SNEAK TRIM
p. 211



SNEAK TRIMLESS
p. 213

CEILING SEMI-RECESSED LUMINAIRES

RUVI
p. 217

CENO 1.0
p. 219

CENO 2.0
p. 219

BLIEK ROUND PETIT
p. 223

BLIEK ROUND
p. 225

SPYDER
p. 227



BLIEK SQUARE
p. 231

CEILING RECESSED IP-RATED

DEEP BIJOU IP65
p. 235

DEEP IP44 | IP65
p. 237

DEEPER IP44
p. 239

TAIO ROUND IP65
p. 243

RINI IP44
p. 245

LUNA ROUND IP44
p. 247

RINI SNEAK IP44
p. 249

LUNA SQUARE IP44
p. 251



PLANO IP44
p. 253

MIRBI IP44 1.0
p. 255

MIRBI IP44 2.0
p. 255

CITY IP44
p. 257

back

HOW DEEP IS YOUR DEEP?

HAVE A LOOK
weverducre.com/deep

DEEP

FIX

bijou 1.0
LED

bijou 2.0
LED

petit 1.0
LED

1.0
LED | MR16 | PAR16

bijou IP65 1.0
LED

IP44 / IP65 1.0
LED | MR16 | PAR16

DEEPER

FIX

1.0
LED | MR16 | PAR16

IP44 1.0
LED | MR16 | PAR16

DEEP CONNECTIONS

DEEP and DEEPER are classic downlights and emit their light beam straight down. Perfect for any room, be it a hallway or living room. But the recessed lights have so much more to offer. DEEP is available in different versions and a variety of sizes. And as an IP44 variant with splash protection as well as an IP65 variant with protection against water jets. This means you can also mount the starry sky in your bathroom. Incidentally, DEEPER is also available as an IP44 variant, which disappears into your ceiling and is virtually invisible. Practical – the entire DEEP family can be controlled via smartphone.

DEEP und DEEPER sind klassische Downlights und geben ihren Lichtstrahl gerade nach unten ab. Perfekt für alle Räume, egal ob Flur oder Wohnzimmer. Doch die Einbauleuchten haben noch viel mehr drauf. So ist DEEP in verschiedenen Versionen und unterschiedlichen Größen zu haben. Und als IP44-Variante spritzwasser- und als IP65-Variante strahlwassergeschützt. Da kann man sich den Sternenhimmel auch ins Badezimmer montieren. Übrigens: Auch DEEPER gibt's als IP44-Variante, die fast unsichtbar in der Decke verschwindet. Praktisch: Die gesamte DEEP Familie kann via Smartphone gesteuert werden.

DEEP ADJUST

ADJUSTABLE

petit 1.0
LED

1.0
LED | MR16 | PAR16

trimless 1.0
LED | MR16 | PAR16



2.0
LED | PAR16



fort 1.0
LED

DEEP ASYM

ADJUSTABLE



1.0
LED | MR16 | PAR16

DON'T BE SHY

Want to place your Ming vase in the right light? Then the swivelling spotlights from the DEEP range are the ideal solution for you. This means your vase can wander around and still remain perfectly lit. Simply readjust by hand. Do you actually have a fresco mural or a special surface structure? Then DEEP ASYM is the perfect solution: The consistent wall washer effect will certainly WOW your guests. Guaranteed.

Sie möchten Ihre Ming Vase ins rechte Licht rücken? Dann sind die schwenkbaren Spots der DEEP Familie die perfekte Lösung für Sie. Damit kann die Vase nämlich auch mal wandern und sie bekommt trotzdem wieder das perfekte Licht. Einfach händisch nachjustieren. Sie haben tatsächlich ein Wandfresko oder eine besondere Oberflächenstruktur? Dann ist DEEP ASYM die perfekte Lösung: Der gleichmäßige Wallwasher-Effekt wird Ihren Gästen ein WOW entlocken. Garantiert.

back

PRIVATE RESIDENCE GERMANY

DEEP bijou

CEILING RECESSED



1.0 LED

LED 4.5W | 250mA | 18V
COB 3-step | excl. power supply
aluminium powder coated

0.065kg IP20 3-step P 30°

85

wire springs 50-52 4-25

	CODE
	165161W_
	165161G_
	165161B_

blade springs 51-54 4-25

	CODE
	165161W_C
	165161G_C
	165161B_C

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	335	>90	3
3000K	350	>90	5

2.0 LED

LED 2x LED 4.5W | 250mA | 36V total
COB 3-step | excl. power supply
aluminium powder coated

0.15kg IP20 3-step P 30°

50-52x100-104 60 4-25

	CODE
	165261W_
	165261G_
	165261B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x335	>90	3
3000K	2x350	>90	5

ALWAYS USE

power supply | 250mA

	CODE
10W dim	90226401
10W DALI	90249402

more power supplies on page 722

ALWAYS USE

power supply | 250mA (1 piece needed)

	CODE
15W dim	90226501
10W DALI	90249402

more power supplies on page 722



only for 2.0 LED version

Rev. 001/2021-07

back

PRIVATE RESIDENCE BELGIUM

DEEP petit

CEILING RECESSED

1.0 LED

LED 6W | 350mA | 18V
COB 3-step | excl. power supply
aluminium powder coated

0.04kg IP20 0.3-D P 34°

P 68-70 50 4-23

	CODE
	153261W_
	153261S_
	153261G_
	153261B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	540 | >90	3
3000K	570 | >90	5
1800-2700K | 15V	360 | >95	9



fits into Kaiser ThermoX® 9320-11

ALWAYS USE

power supply | 350mA

	CODE
10W	90223401
10W dim	90223402
12W DALI	90243402

back

PRIVATE RESIDENCE | COBRAS BELGIUM

DEEP

CEILING RECESSED

1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated | CRI >90

0.31kg IP20 0,3 P 36°

90

wire springs 76-79 4-27

	CODE
	112161W_
	112161S_
	112161G_
	112161B_

blade springs 76-79 min 10

	CODE
	112161W_C
	112161B_C

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	530/710	>90	3
3000K	570/770	>90	5
4000K	610/830	>90	6
1800-2850K | 16V	330/450	>95	9

ALWAYS USE

power supply | 500mA

	CODE
10W	90214405
10W dim	90224402
12W DALI	90244402

more specs on page 724

1.0 MR16

QR-CBC51 max. 12W | GU5.3
12V | excl. power supply
aluminium powder coated

0.25kg IP20 0,3

90

wire springs 76-79 4-27

	CODE
	112110W0
	112110S0
	112110G0
	112110B0

blade springs 76-79 min 10

	CODE
	112110W0C
	112110B0C

ALWAYS USE

power supply | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

more specs on page 727

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.29kg IP20 0,3

105

wire springs 76-79 4-27

	CODE
	112120W0
	112120S0
	112120G0
	112120B0

blade springs 76-79 min 10

	CODE
	112120W0C
	112120B0C

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

back

PRIVATE RESIDENCE | ADINS VAN LOOVEREN BELGIUM

DEEPER

CEILING RECESSED





1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated

0.17kg IP20 0,3 P 36°

76-79 95 4-38

	CODE
	152161W_
	152161S_
	152161G_
	152161Q_
	152161B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	510/680	>90	3
3000K	550/740	>90	5
1800-2850K | 16V	315/430	>95	9

ALWAYS USE

power supply | 500mA

	CODE
10W	90214405
10W dim	90224402
12W DALI	90244402

350mA power supplies on page 723

1.0 MR16

QR-CBC51 max. 12W | GU5.3
12V | excl. power supply
aluminium powder coated

0.11kg IP20 0,3

76-79 100 4-38

	CODE
	152110W0
	152110S0
	152110G0
	152110Q0
	152110B0

ALWAYS USE

power supply | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

more specs on page 727

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.15kg IP20 0,3

76-79 115 4-38

	CODE
	152120W0
	152120S0
	152120G0
	152120Q0
	152120B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

PRIVATE RESIDENCE | EVA CARLIER INTERIOR DESIGN BELGIUM

DEEP ADJUST petit

CEILING RECESSED



fits into Kaiser ThermoX® 9320-11

1.0 LED

LED 6W | 350mA | 18V
COB 3-step | excl. power supply
aluminium powder coated

0.05kg IP20 §+0.3+D Ⓟ 34°

68 35°/35° 355° 65

wire springs 68-70 4-23

	CODE
	153361W_
	153361G_
	153361Q_
	153361B_

blade springs 69-71 min 8

	CODE
	153361W_C
	153361B_C

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	540 | >90	3
3000K	570 | >90	5
1800-2700K | 15V	360 | >95	9

ALWAYS USE

power supply | 350mA

	CODE
10W	90223401
10W dim	90223402
12W DALI	90243402

more power supplies on page 723

back

DEEP ADJUST

CEILING RECESSED

1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated

0.23kg IP20 0,3-∅ P 36°

35°/35° 355° 90

wire springs 86-89 4-23

	CODE
	112361W_
	112361S_
	112361G_
	112361Q_
	112361B_

blade springs 86-89 min 6

	CODE
	112361W_C
	112361B_C

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	530/710 | >90	3
3000K	570/770 | >90	5
4000K	620/830 | >90	6
1800-2850K | 16V	330/450 | >95	9

ALWAYS USE

power supply | 500mA

	CODE
10W	90214405
10W dim	90224402
12W DALI	90244402

350mA power supplies on page 723

1.0 MR16

QR-CBC51 max. 12W | GU5.3
12V | excl. power supply
aluminium powder coated

0.17kg IP20 0,3-∅

35°/35° 355° 90

wire springs 86-89 4-23

	CODE
	112310W0
	112310S0
	112310G0
	112310Q0
	112310B0

blade springs 86-89 min 6

	CODE
	112310W0C
	112310B0C

ALWAYS USE

power supply | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

more specs on page 727

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.21kg IP20 0,3-∅

35°/35° 355° 105

wire springs 86-89 4-23

	CODE
	112320W0
	112320S0
	112320G0
	112320Q0
	112320B0

blade springs 86-89 min 6

	CODE
	112320W0C
	112320B0C

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

PRIVATE RESIDENCE | INTÉRIEURS D'ARCHITECTES FRANCE

DEEP ADJUST

CEILING RECESSED





2.0 LED

2x LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

0.61kg · IP20 · 0,3-step · P · 36° · 86-89x172-178 · 35°/35° · 355° · 90 · 4-23

	CODE
	112761W_
	112761B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x530/710	>90	3
3000K	2x570/770	>90	5
4000K	2x620/830	>90	6
1800-2850K	2x330/450	>95	9

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.42kg · IP20 · 0,3-step · 86-89x172-178 · 35°/35° · 355° · 105 · 4-23

	CODE
	112720W0
	112720B0

ALWAYS USE

power supply | 500mA

	CODE
10W	90214405
10W dim	90224402
12W DALI	90244402

more specs on page 724

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

back

DEEP ADJUST trimless

CEILING RECESSED

1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated

0.23kg IP20 0.3+ P 36°

105-110 35°/35° 355° 95

	CODE
	112861W_
	112861G_
	112861B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	530/710 | >90	3
3000K	570/770 | >90	5
4000K	620/830 | >90	6
1800-2850K | 16V	330/450 | >95	9

ALWAYS USE

plasterkit 105-110 12.5, 15, 20, 25

	CODE
	90017209

power supply | 500mA

	CODE
10W	90214405
10W dim	90224402
12W DALI	90244402

more specs on page 724

1.0 MR16

QR-CBC51 max. 12W | GU5.3
12V | excl. power supply
aluminium powder coated

0.17kg IP20 0.3+

105-110 35°/35° 355° 95

	CODE
	112810W0
	112810G0
	112810B0

ALWAYS USE

plasterkit 105-110 12.5, 15, 20, 25

	CODE
	90017209

power supply | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

more specs on page 727

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.21kg IP20 0.3+

105-110 35°/35° 355° 110

	CODE
	112820W0
	112820G0
	112820B0

ALWAYS USE

plasterkit 105-110 12.5, 15, 20, 25

	CODE
	90017209

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

back

OFFICE INARTO | INARTO ARCHITECTEN HERENTALS | BELGIUM

DEEP ASYM adjust

CEILING RECESSED

1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated

0.25kg IP20 87-88 35°/35° 355° 100 4-25

	CODE
	112461W_
	112461S_
	112461G_
	112461B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	460/610 | >90	3
3000K	470/670 | >90	5
1800-2850K | 16V	290/390 | >95	9

1.0 MR16

QR-CBC51 max. 12W | GU5.3
12V | excl. power supply
aluminium powder coated

0.19kg IP20 87-88 35°/35° 355° 90 4-25

	CODE
	112410W0
	112410S0
	112410G0
	112410B0

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.23kg IP20 87-88 35°/35° 355° 115 4-25

	CODE
	112420W0
	112420S0
	112420G0
	112420B0

ALWAYS USE

power supply | 500mA

	CODE
10W	90214405
10W dim	90224402
12W DALI	90244402

more specs on page 724

ALWAYS USE

power supply | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

more specs on page 727

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

back

PRIVATE RESIDENCE AUSTRIA

DEEP ADJUST fort

CEILING RECESSED



1.0 LED

LED 25W | 700mA | 36V
COB 3-step | excl. power supply
aluminium powder coated

0.362kg IP20 0,3-D P 34° 126-130 30°/30° 355° 130 4-25

	CODE
	112961W_
	112961B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	2480	>90	5
4000K	2660	>90	6

ALWAYS USE

power supply | 700mA

	CODE
30W dim	90225702
35W DALI	90245801

more specs on page 725

back

PRIVATE RESIDENCE BELGIUM

SPINEO

CEILING RECESSED

1.0 LED

LED 8W | 220-240VAC
COB 3-step | phase-cut dim
aluminium powder coated

0.20kg | IP20 | 0,3-step | 36° | 28°/28° | 355° | 75

wire springs 79-83 4-16

	CODE
	160168W_
	160168B_

blade springs 79-83 min 4

	CODE
	160168W_C
	160168B_C

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	515 | >90	3
3000K	535 | >90	5

fits into Kaiser ThermoX® 9320-11

1.0 MR16

QR-CBC51 max. 12W | GU5.3
12V | excl. power supply
aluminium powder coated

0.14kg | IP20 | 0,3-step | 35°/35° | 355° | 65

wire springs 79-83 4-16

	CODE
	160110W0
	160110B0

blade springs 79-83 min 4

	CODE
	160110W0C
	160110B0C

ALWAYS USE

power supply | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

more specs on page 727

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.18kg | IP20 | 0,3-step | 35°/35° | 355° | 70

wire springs 79-83 4-16

	CODE
	160120W0
	160120B0

blade springs 79-83 min 4

	CODE
	160120W0C
	160120B0C

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

back

PRIVATE RESIDENCE | CANDICE BRUNY FRANCE

RONY

CEILING RECESSED

1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated

0.34kg IP20 0,3 P 36°

102-104 35°/35° 355° 90

4-25

	CODE
	110161W_
	110161B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	530/710	>90	3
3000K	570/770	>90	5
1800-2850K | 16V	330/450	>95	9

ALWAYS USE

power supply | 500mA

	CODE
10W	90214405
10W dim	90224402
12W DALI	90244402

350mA power supplies on page 723

1.0 MR16

QR-CBC51 max.12W | GU5.3
12V | excl. power supply
aluminium powder coated

0.28kg IP20 0,3

102-104 35°/35° 355° 75

4-25

	CODE
	110110W0
	110110B0

ALWAYS USE

power supply | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

more specs on page 727

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.32kg IP20 0,3

102-104 35°/35° 355° 100

4-25

	CODE
	110120W0
	110120B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

back

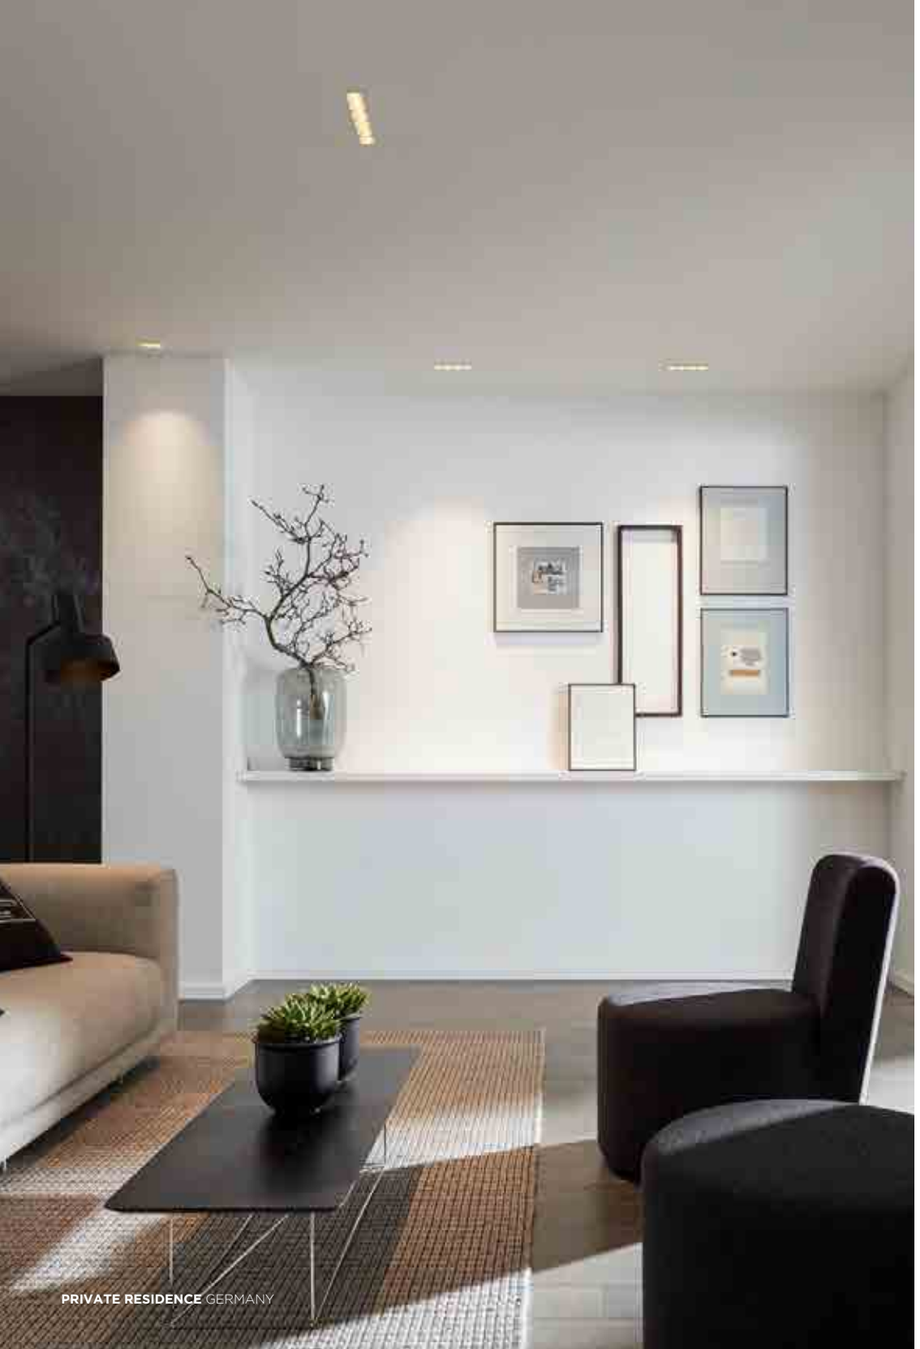

PRIVATE RESIDENCE GERMANY

PIRRO

CEILING RECESSED

p. 289 p. 409

GOOD DESIGN

As awarded by The Chicago Athenaeum: Museum of Architecture and Design

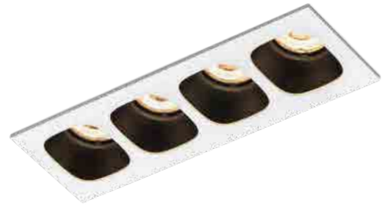









1.0

LED 4.5W | 500mA | 9V
COB 3-step | excl. power supply
aluminium powder coated | PC
lens and reflector

0.09 kg IP20 0,3-D 32° P

50x50 85 4-25

	CODE
	150151E_
	150151J_
	150151K_
	150151B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	380	>90	3
3000K	405	>90	5

ALWAYS USE

power supply | 500mA

	CODE
7W dim	90224301
12W DALI	90244402

more power supplies on page 724 and accessories on page 744

2.0

2x LED 4.5W | 500mA | 18V total
COB 3-step | excl. power supply
aluminium powder coated | PC
lens and reflector

0.155 kg IP20 0,3-D 32° P

93x50 60 4-25

	CODE
	150251E_
	150251J_
	150251K_
	150251B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x380	>90	3
3000K	2x405	>90	5

ALWAYS USE

power supply | 500mA (1 piece needed)

	CODE
15W dim	90224503
12W DALI	90244402

more power supplies on page 724 and accessories on page 744

4.0

4x LED 4.5W | 500mA | 36V total
COB 3-step | excl. power supply
aluminium powder coated | PC
lens and reflector

0.28 kg IP20 0,3-D 32° P

181x50 60 4-25

	CODE
	150451E_
	150451J_
	150451K_
	150451B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x380	>90	3
3000K	4x405	>90	5

ALWAYS USE

power supply | 500mA (1 piece needed)

	CODE
20W dim	90224602
20W DALI	90244604

more power supplies on page 724 and accessories on page 744

6.0

6x LED 4.5W | 500mA | 2x27V
COB 3-step | excl. power supply
aluminium powder coated | PC
lens and reflector

0.40 kg IP20 0,3-D 32° P

269x50 60 4-25

	CODE
	150651E_
	150651J_
	150651K_
	150651B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	6x380	>90	3
3000K	6x405	>90	5

ALWAYS USE

power supply | 500mA (2 pieces needed)

	CODE
20W dim	90224602
20W DALI	90244604

more power supplies on page 724 and accessories on page 744

back

HIDDEN CHAMPIONS

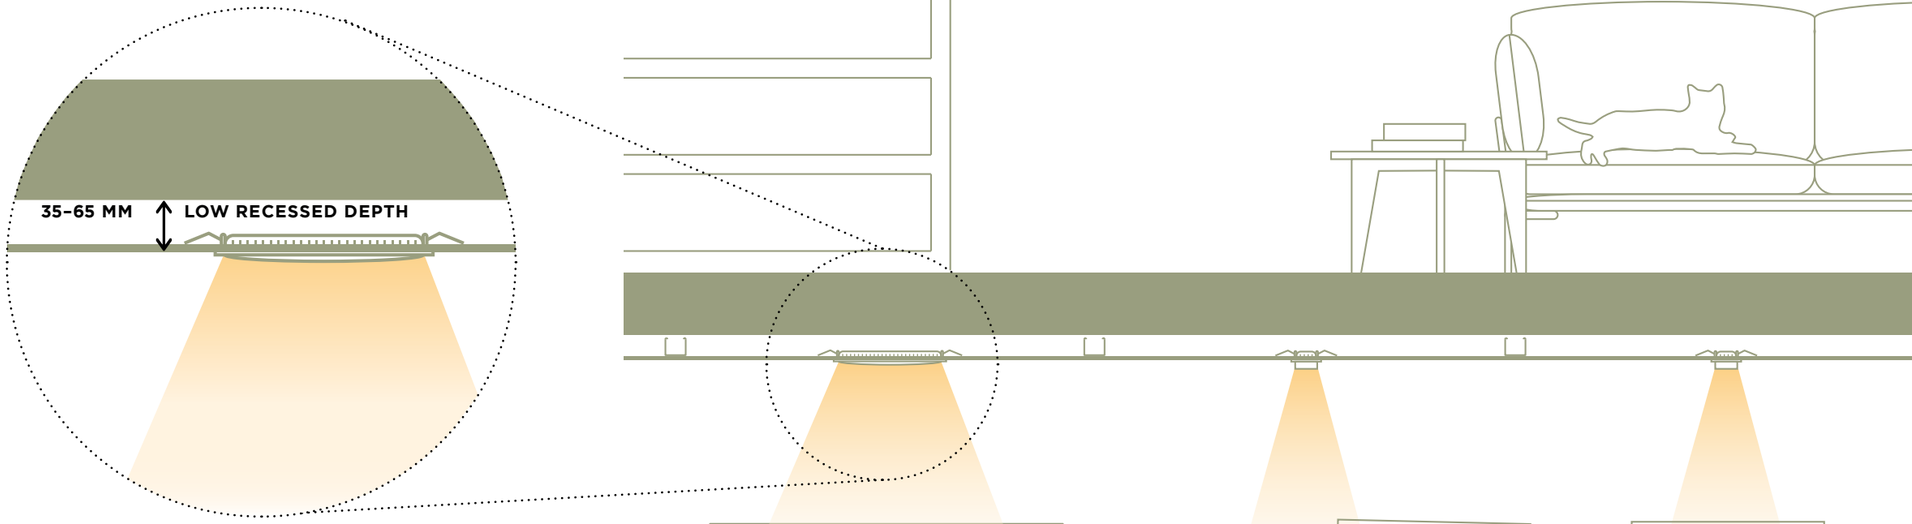

FLAT ‘N’ FANCY

Sleek built-in luminaires are subtle, elegant, and let every room shine in the brightest light. No wonder the space-saving all-rounders are among the most popular lighting choices these days. That said, there are some requirements you’ll need to consider when mounting recessed luminaires. Especially with low ceilings in modern living spaces or the lack of space in suspended ceilings, things can get really tricky – and every centimetre counts.
The solution? Extra low recessed ceiling luminaires by Wever & Ducré. The small, compact lights have been specially designed for low ceilings with low installation depths and are not only true space savers, but also a design highlight – perfect for renovation projects and small city apartments.

HOCH HINAUS

Schlichte Einbauleuchten halten sich optisch elegant im Hintergrund, während sie jeden Raum in seinem besten Licht erstrahlen lassen. Kein Wunder also, dass die platzsparenden Alleskönner so beliebt sind. Trotzdem: Gewisse Voraussetzungen müssen für den Einbau gegeben sein. Denn vor allem mit niedrigen Deckenhöhen in modernen Wohnräumen oder zu wenig Platz in den Zwischendecken kann es schon mal ganz schön knifflig werden – dabei zählt jeder Zentimeter. Die Lösung: besonders flache Einbauleuchten von Wever & Ducré. Die kleinen, kompakten Leuchten wurden speziell für niedrige Räume mit wenig Einbautiefe entwickelt und sind nicht nur platzsparend, sondern vor allem auch ein echtes Designhighlight – perfekt für Renovierungsprojekte und kleine City-Apartments.

DEEP bijou 2.0	p. 165	**60 mm**
DEEP petit	p. 167	**50 mm**
DEEP ADJUST petit	p. 173	**65 mm**
PIRRO 2.0 | 4.0 | 6.0	p. 189	**60 mm**
NOP petit	p. 193	**65 mm**
PLANO petit	p. 201	**65 mm**
CENO 2.0 | 3.0	p. 219	**60 mm**

BLIEK ROUND petit	p. 223	**60 mm**
RINI IP44	p. 245	**60 mm**
RINI SNEAK IP44	p. 249	**46 mm**
LUNA ROUND IP44	p. 247	**50 mm**
LUNA SQUARE IP44	p. 251	**50 mm**
MIRBI IP44	p. 255	**50 mm**
CITY IP44	p. 257	**50 mm**

back

PRIVATE RESIDENCE BELGIUM

NOP petit

CEILING RECESSED



1.0 LED

LED 6W | 350mA | 18V
COB 3-step | excl. power supply
aluminium powder coated
round cut out for mounting

0.18kg IP20 0,3 P 34°

35°/35° 355° 65

wire springs 68-70 4-13

	CODE
	130561W_
	130561S_
	130561B_

blade springs 70-76 min 4

	CODE
	130561W_C
	130561S_C
	130561B_C

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	540 | >90	3
3000K	570 | >90	5
1800-2700K | 15V	350 | >95	9



fits into Kaiser ThermoX® 9320-11

ALWAYS USE

power supply | 350mA

	CODE
10W	90223401
10W dim	90223402
12W DALI	90243402

more power supplies on page 723

back

NOP

CEILING RECESSED



1.0 LED

LED 8W | 220-240VAC
COB 3-step | phase-cut dim
aluminium powder coated
round cut out for mounting

0.26kg IP20 0,3 36°

30°/30° 355° 95

wire springs 83-86 4-30

	CODE
	130468W_
	130468S_
	130468B_

blade springs 83-92 min 4

	CODE
	130468W_C
	130468S_C
	130468B_C

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	515 | >90	3
3000K	535 | >90	5



fits into Kaiser ThermoX® 9320-11



1.0 MR16

QR-CBC51 max. 12W | GU5.3
12V | excl. power supply
aluminium powder coated
round cut out for mounting

0.11kg IP20 0,3

35°/35° 95

wire springs 83-86 4-30

	CODE
	130410W0
	130410S0
	130410B0

blade springs 83-92 min 4

	CODE
	130410W0C
	130410S0C
	130410B0C

ALWAYS USE

power supply | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

more specs on page 727

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
round cut out for mounting

0.14kg IP20 0,3

35°/35° 83

wire springs 83-86 4-30

	CODE
	130420W0
	130420S0
	130420B0

blade springs 83-92 min 4

	CODE
	130420W0C
	130420S0C
	130420B0C

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

SHOWROOM | GRANDO KEUKENS SINT-MARTENS-LATEM | BELGIUM

RON

CEILING RECESSED





1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
round cut-out for mounting

0.36kg IP20 0,3 P 36°

102-104 35°/35° 355° 90

4-25

	CODE
	111161W_
	111161B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	530/710	>90	3
3000K	570/770	>90	5
1800-2850K | 16V	330/450	>95	9

1.0 MR16

QR-CBC51 max. 12W | GU5.3
12V | excl. power supply
aluminium powder coated
round cut-out for mounting

0.30kg IP20 0,3

102-104 35°/35° 355° 75

4-25

	CODE
	111110W0
	111110B0

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
round cut-out for mounting

0.34kg IP20 0,3

102-104 35°/35° 355° 100

4-25

	CODE
	111120W0
	111120B0

fits in round cut out

ALWAYS USE

power supply | 500mA

	CODE
10W	90214405
10W dim	90224402
12W DALI	90244402

350mA power supplies on page 723

ALWAYS USE

power supply | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

more specs on page 727

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

back

PRIVATE RESIDENCE | SIGGE ARCHITECTS, ANTTI KORPI I TECLUX OY + SIGGE ARCHITECTS, ANTTI KORPI FINLAND

RON

CEILING RECESSED







2.0 LED

LED 2x LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

0.73kg IP20 0-3-DALI P 36°

102x210 35°/35° 355° 90 4-25

	CODE
	111261W_
	111261B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x530/710	>90	3
3000K	2x570/770	>90	5
1800-2850K	2x330/450	>95	9

ALWAYS USE

power supply | 500mA

	CODE
10W	90214405
10W dim	90224402
12W DALI	90244402

350mA power supplies on page 723

3.0 LED

LED 3x LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

1.08kg IP20 0-3-DALI P 36°

102x320 35°/35° 355° 90 4-25

	CODE
	111361W_
	111361B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3x530/710	>90	3
3000K	3x570/770	>90	5
1800-2850K	3x330/450	>95	9

ALWAYS USE

power supply | 500mA

	CODE
10W	90214405
10W dim	90224402
12W DALI	90244402

350mA power supplies on page 723

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.69kg IP20 0-3-DALI

102x210 35°/35° 355° 100 4-25

	CODE
	111220W0
	111220B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

3.0 PAR16

3x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

1.02kg IP20 0-3-DALI

102x320 35°/35° 355° 100 4-25

	CODE
	111320W0
	111320B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

back

PRIVATE RESIDENCE BELGIUM

PLANO petit

CEILING RECESSED







1.0 LED

LED 6W | 350mA | 18V
COB 3-step | excl. power supply
aluminium powder coated

0.08kg | IP20 | 0,3-step | P | 34°

54x59 | 25°/25° | 355° | 65 | 2-22

	CODE
	162161W_
	162161Q_
	162161B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	540	>90	3
3000K	570	>90	5
1800-2700K | 15V	360	>95	9

ALWAYS USE

power supply | 350mA

	CODE
10W	90223401
10W dim	90223402
12W DALI	90243402

more power supplies on page 723

2.0 LED

LED 2x LED 6W | 350mA | 18V
COB 3-step | excl. power supply
aluminium powder coated

0.15kg | IP20 | 0,3-step | P | 34°

54x110 | 25°/25° | 355° | 65 | 2-22

	CODE
	162261W_
	162261Q_
	162261B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x540	>90	3
3000K	2x570	>90	5
1800-2700K | 15V	2x360	>95	9

ALWAYS USE

power supply | 350mA

	CODE
10W	90223401
10W dim	90223402
12W DALI	90243402

more power supplies on page 723

3.0 LED

LED 3x LED 6W | 350mA | 18V
COB 3-step | excl. power supply
aluminium powder coated

0.22kg | IP20 | 0,3-step | P | 34°

54x162 | 25°/25° | 355° | 65 | 2-22

	CODE
	162361W_
	162361Q_
	162361B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3x540	>90	3
3000K	3x570	>90	5
1800-2700K | 15V	3x360	>95	9

ALWAYS USE

power supply | 350mA

	CODE
10W	90223401
10W dim	90223402
12W DALI	90243402

more power supplies on page 723



back

PRIVATE RESIDENCE | STUDIO BENOIT BELGIUM



PLANO

CEILING RECESSED



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

0.26kg IP20 §•0,3•) Ⓟ 36°

74x78 35°/35° 355° 95 2-18

	CODE
	118161W_
	118161S_
	118161Q_
	118161B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	510/680 | >90	3
3000K	550/740 | >90	5
1800-2850K	330/450 | >95	9

ALWAYS USE

power supply | 500mA

	CODE
10W	90214405
10W dim	90224402
12W DALI	90244402

350mA power supplies on page 723

OPTIONAL

	CODE
plasterkit	90017104



2.0 LED

2x LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

0.48kg IP20 §•0,3•) Ⓟ 36°

74x148 35°/35° 355° 95 2-18

	CODE
	118261W_
	118261S_
	118261Q_
	118261B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	2x510/680 | >90	3
3000K	2x550/740 | >90	5
1800-2850K	2x330/450 | >95	9

ALWAYS USE

power supply | 500mA

	CODE
10W	90214405
10W dim	90224402
12W DALI	90244402

350mA power supplies on page 723

OPTIONAL

	CODE
plasterkit	90017105



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.24kg IP20 §•0,3•)

74x78 35°/35° 355° 120 2-18

	CODE
	118120W0
	118120S0
	118120Q0
	118120B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

OPTIONAL

	CODE
plasterkit	90017104



2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.44kg IP20 §•0,3•)

74x148 35°/35° 355° 120 2-18

	CODE
	118220W0
	118220S0
	118220Q0
	118220B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

OPTIONAL

	CODE
plasterkit	90017105

back

SHOWROOM KANVAS LIQUIDFLOORS | WE WANT MORE WIJNEGEM | BELGIUM

PLANO ADJUST fort

CEILING RECESSED



1.0 LED

LED 25W | 700mA | 36V
COB 3-step | excl. power supply
aluminium powder coated

0.381kg IP20 3-step-dim P 34° 111x111 30°/30° 355° 130 4-25

	CODE
	118961W_
	118961B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	2480	>90	5
4000K	2660	>90	6

ALWAYS USE

power supply | 700mA

	CODE
30W dim	90225702
35W DALI	90245801

more specs on page 725

back

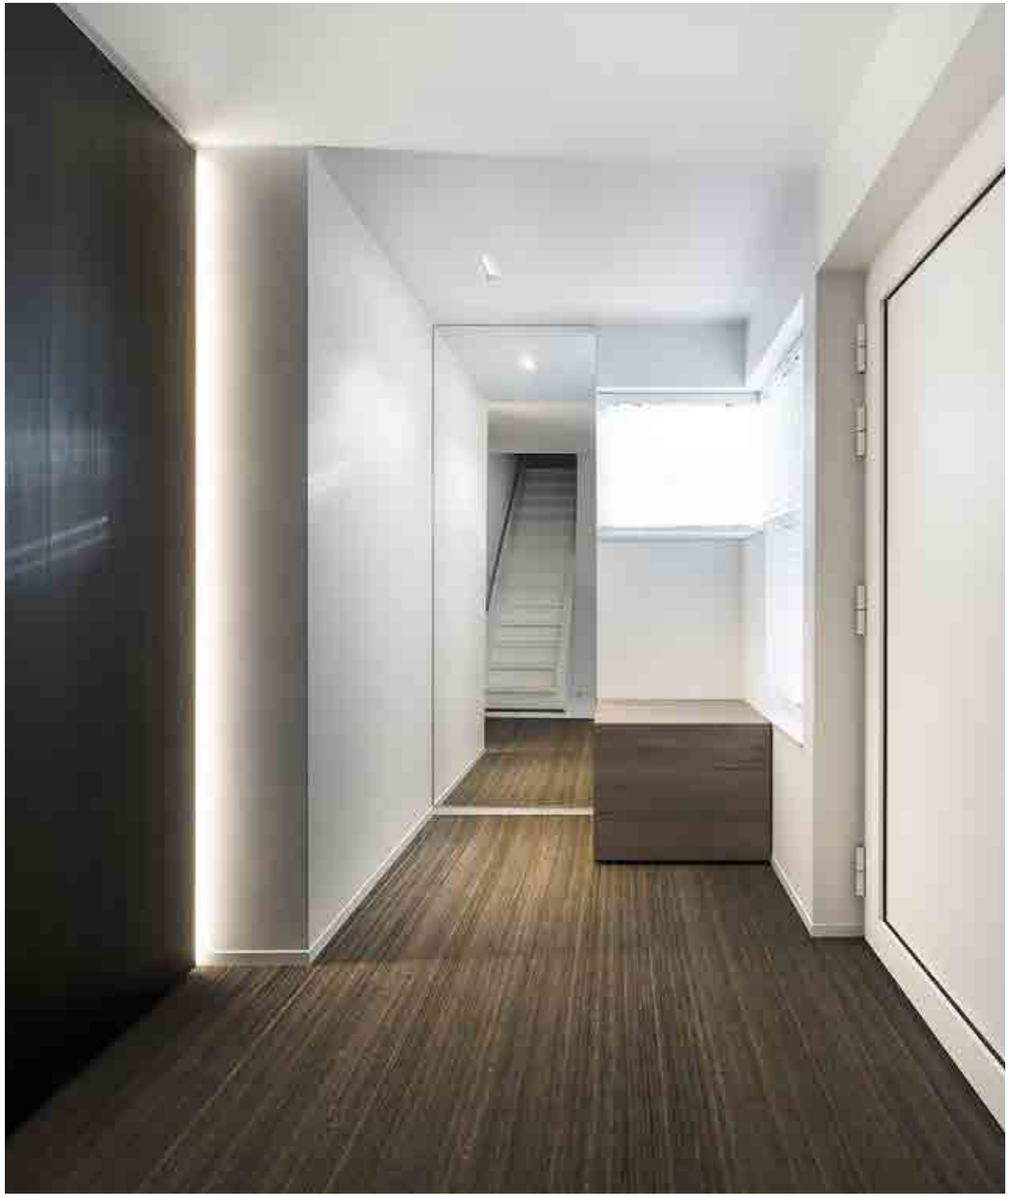

PRIVATE RESIDENCE | LOFT4C INTERIEURARCHITECTEN BELGIUM

STRANGE petit

CEILING RECESSED







1.0 LED

LED 6W | 350mA | 18V
COB 3-step | excl. power supply
aluminium powder coated

0.07kg | IP20 | 0,3-step | P | 31°

25°/25° | 355° | 65

	CODE
	163161W_
	163161B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	540	>90	3
3000K	570	>90	5
1800-2700K | 15V	360	>95	9

2.0 LED

LED 2x 6W | 350mA | 18V
COB 3-step | excl. power supply
aluminium powder coated

0.13kg | IP20 | 0,3-step | P | 31°

25°/25° | 355° | 65

	CODE
	163261W_
	163261B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x540	>90	3
3000K	2x570	>90	5
1800-2700K | 15V	2x360	>95	9

3.0 LED

LED 3x 6W | 350mA | 18V
COB 3-step | excl. power supply
aluminium powder coated

0.19kg | IP20 | 0,3-step | P | 31°

25°/25° | 355° | 65

	CODE
	163361W_
	163361B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3x540	>90	3
3000K	3x570	>90	5
1800-2700K | 15V	3x360	>95	9

ALWAYS USE

plastic plasterkit | 68x68 | 10 or 13

	CODE
	90017200
	90017201

aluminium plasterkit | 64x64 | 7-17

	CODE
	90017202

power supply | 350mA

	CODE
10W	90223401
10W dim	90223402
12W DALI	90243402

more power supplies on page 723

ALWAYS USE

plastic plasterkit | 68x119 | 10 or 13

	CODE
	90017203
	90017204

aluminium plasterkit | 64x117 | 7-17

	CODE
	90017205

power supply | 350mA

	CODE
10W	90223401
10W dim	90223402
12W DALI	90243402

more power supplies on page 723

ALWAYS USE

plastic plasterkit | 68x171 | 10 or 13

	CODE
	90017206
	90017207

aluminium plasterkit | 64x169 | 7-17

	CODE
	90017208

power supply | 350mA

	CODE
10W	90223401
10W dim	90223402
12W DALI	90243402

more power supplies on page 723



back

PRIVATE RESIDENCE | JELLE VANDECASTEELE | THE ART OF LIVING MAGAZINE BELGIUM

STRANGE

CEILING RECESSED



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

0.43kg IP20 0.3 P 36°

35°/35° 355° 95

	CODE
	131161W_
	131161B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	510/680	>90	3
3000K	550/740	>90	5
1800-2850K	330/450	>95	9

ALWAYS USE

plastic plasterkit 86x86 10 or 13

	CODE
	90017122
	90017116

aluminium plasterkit 86x86 8-32

	CODE
	90017120

power supply | 500mA

	CODE
10W	90214405
10W dim	90224402
12W DALI	90244402

350mA power supplies on page 723



2.0 LED

2x LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

0.74kg IP20 0.3 P 36°

35°/35° 355° 95

	CODE
	131261W_
	131261B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x510/680	>90	3
3000K	2x550/740	>90	5
1800-2850K	2x330/450	>95	9

ALWAYS USE

plastic plasterkit 86x156 10 or 13

	CODE
	90017123
	90017117

aluminium plasterkit 86x156 8-32

	CODE
	90017121

power supply | 500mA

	CODE
10W	90214405
10W dim	90224402
12W DALI	90244402

350mA power supplies on page 723



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.41kg IP20 0.3

35°/35° 355° 120

	CODE
	131120W0
	131120B0

ALWAYS USE

plastic plasterkit 86x86 10 or 13

	CODE
	90017122
	90017116

aluminium plasterkit 86x86 8-32

	CODE
	90017120

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729



2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.70kg IP20 0.3

35°/35° 355° 120

	CODE
	131220W0
	131220B0

ALWAYS USE

plastic plasterkit 86x156 10 or 13

	CODE
	90017123
	90017117

aluminium plasterkit 86x156 8-32

	CODE
	90017121

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

RIVER STONE | ZOOI INTERIOR STUDIO KIEV | UKRAINE

SNEAK trim

CEILING RECESSED

K



B



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

0.19 kg | IP20 | 0,3-D | 28°

74x78 | 35°/35° | 355° | 95 | 2-18

	CODE
	155351W_
	155351K_
	155351B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	400/530	>90	3
3000K	425/570	>90	5
1800-2850K	250/340	>95	9

ALWAYS USE

power supply | 500mA

	CODE
10W	90214405
10W dim	90224402
12W DALI	90244402

350mA power supplies on page 723



2.0 LED

2x LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

0.34 kg | IP20 | 0,3-D | 28°

74x148 | 35°/35° | 355° | 95 | 2-18

	CODE
	155451W_
	155451K_
	155451B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x400/530	>90	3
3000K	2x425/570	>90	5
1800-2850K	2x250/340	>95	9

ALWAYS USE

power supply | 500mA

	CODE
10W	90214405
10W dim	90224402
12W DALI	90244402

350mA power supplies on page 723

PRIVATE RESIDENCE OBUMEX – STEENOVEN BELGIUM





SNEAK trimless

CEILING RECESSED





1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

0.19 kg | IP20 | 0,3 | 28° | 35°/35° | 355° | 95

	CODE
	155151W_
	155151K_
	155151B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	400/530 | >90	3
3000K	425/570 | >90	5
1800-2850K	250/340 | >95	9

ALWAYS USE

plastic plasterkit 86x86 | 10 or 13

	CODE
	90017122
	90017116

aluminium plasterkit 86x86 | 8-32

	CODE
	90017120

power supply | 500mA

	CODE
10W	90214405
10W dim	90224402
12W DALI	90244402

350mA power supplies on page 723

2.0 LED

2x LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

0.34 kg | IP20 | 0,3 | 28° | 35°/35° | 355° | 95

	CODE
	155251W_
	155251K_
	155251B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	2x400/530 | >90	3
3000K	2x425/570 | >90	5
1800-2850K	2x250/340 | >95	9

ALWAYS USE

plastic plasterkit 86x156 | 10 or 13

	CODE
	90017123
	90017117

aluminium plasterkit 86x156 | 8-32

	CODE
	90017121

power supply | 500mA

	CODE
10W	90214405
10W dim	90224402
12W DALI	90244402

350mA power supplies on page 723

DIM THE LIGHTS

IT CAN BE SO EASY

Lighting a room has never been easier than with our new collection of Bluetooth-compatible products. All it takes to adjust and dim your lights is a simple swipe on your smartphone screen. Sounds easy? It is. Choose your favourite products from our collection, add the Bluetooth dimmer behind the switch and connect them to your light control app and you're good to go. Whether you want bright lights for breakfast, a candle-lit atmosphere for dinner, or anything in between – just kick up your feet and touch to set your desired mood.

Noch nie war die Beleuchtung so einfach wie mit unseren Bluetooth-kompatiblen Produkten – ein einfacher Klick genügt. Klingt einfach? Ist es auch: Lieblingsprodukte aus unserer Kollektion auswählen, den Bluetooth Dimmer hinter dem Lichtschalter hinzufügen, mit Ihrer Light Control App verbinden und los geht's. Ob ein hell erleuchtetes Frühstück, schummrige Atmosphäre für ein Candle-Light-Dinner oder für alles dazwischen – zurücklehnen und die gewünschte Lichtstimmung genießen.

WHAT YOU NEED

smartphone with Wever & Ducré bluetooth app

+

Wever & Ducré bluetooth dimmer find on page 728

+

Wever & Ducré phase-cut dim products

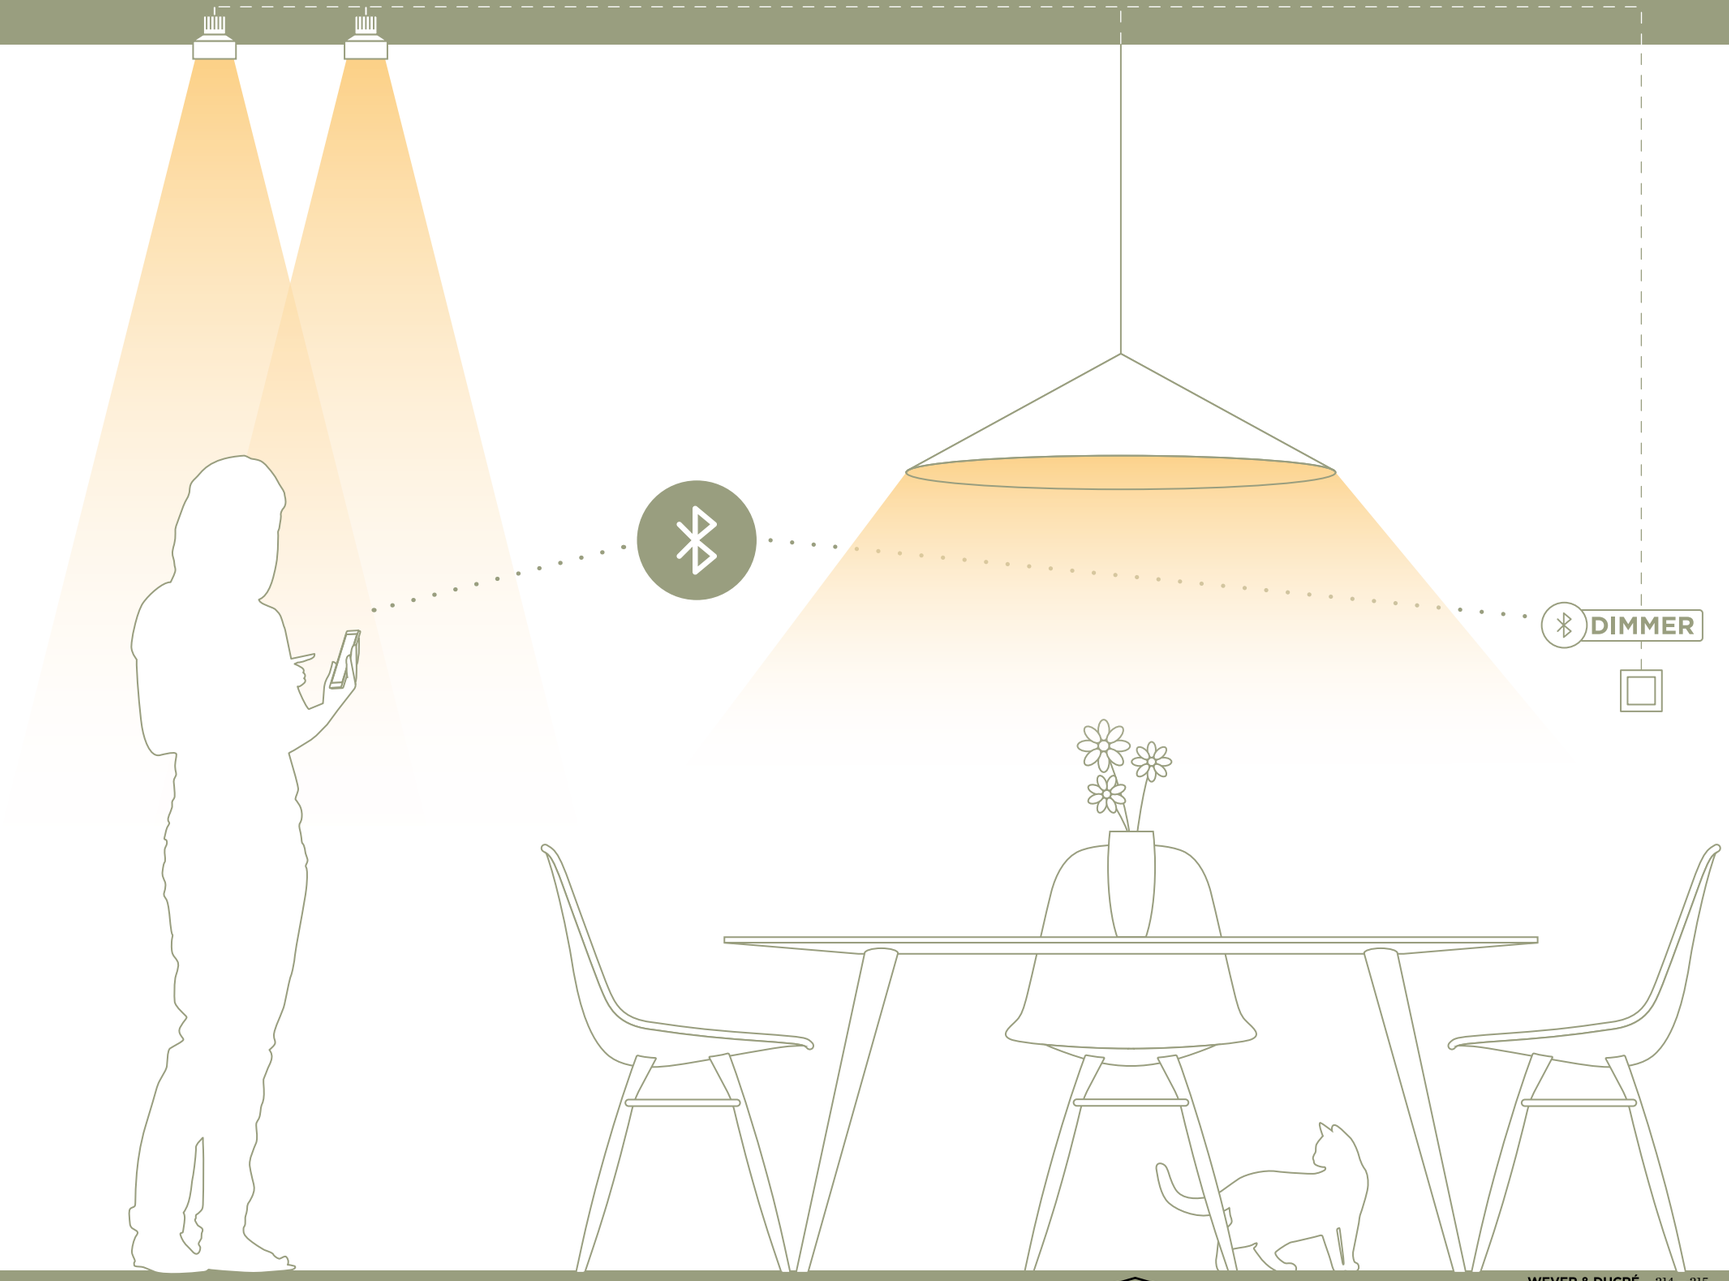

EETCAFÉ DEN OS | MARKEY & SCHELSTRATE NUKERKE | BELGIUM

RUVI

CEILING RECESSED

1.0

LED G95 max. 12W | E27
220-240VAC | 50-60Hz
aluminium powder coated

0.25kg IP20

54-56 90 7-33

	CODE
	1671E0B0

OPTIONAL

G95 LED E27 6W 400lm 2200K
phase-cut dim

	CODE
gold mirror	9003E151

G95 LED E27 6W 500lm 2700K
phase-cut dim

	CODE
gold mirror	9003E142
silver mirror	9003E149

G95 LED Filament | E27 6W
450lm 2200K | phase-cut dim

	CODE
clear	9003E111

more lamps and specs on page 730

back

PRIVATE RESIDENCE BELGIUM



only for 2.0 + 3.0 LED version

CENO

CEILING RECESSED

p. 317 p. 349 p. 397



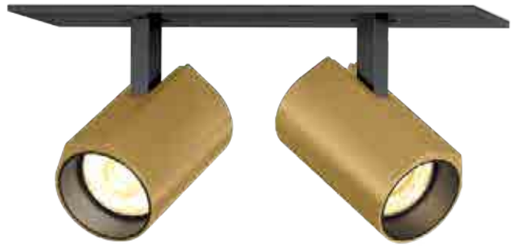







1.0 LED

LED 6W | 350mA | 18V
COB 3-step | excl. power supply
aluminium powder coated

0.12kg IP20 0,3-D P 35°

45-47 90° 350° 85 4-26

	CODE
	166161W_
	166161G_
	166161Q_
	166161K_
	166161B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	440	>90	3
3000K	470	>90	5
1800-2700K	320	>95	9

ALWAYS USE

power supply | 350mA

	CODE
10W dim	90223402
12W DALI	90243402

more power supplies on page 723 and accessories on page 744

1.1 LED

LED 6W | 350mA | 18V
COB 3-step | excl. power supply
aluminium powder coated

0.13kg IP20 0,3-D P 35°

32x66 90° 350° 85 4-26

	CODE
	166861W_
	166861G_
	166861Q_
	166861K_
	166861B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	440	>90	3
3000K	470	>90	5
1800-2700K	320	>95	9

ALWAYS USE

power supply | 350mA

	CODE
10W dim	90223402
12W DALI	90243402

more power supplies on page 723 and accessories on page 744

2.0 LED

2x LED 6W | 700mA | 18V total
COB 3-step | excl. power supply
aluminium powder coated

0.26kg IP20 0,3-D P 35°

32x145 90° 350° 60 4-26

	CODE
	166261W_
	166261G_
	166261Q_
	166261K_
	166261B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x440	>90	3
3000K	2x470	>90	5

ALWAYS USE

power supply | 700mA (1 piece needed)

	CODE
15W dim	90225502
35W DALI	90245801

more power supplies on page 725 and accessories on page 744

3.0 LED

3x LED 6W | 700mA | 27V total
COB 3-step | excl. power supply
aluminium powder coated

0.39kg IP20 0,3-D P 35°

32x221 90° 350° 60 4-26

	CODE
	166461W_
	166461G_
	166461Q_
	166461K_
	166461B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3x440	>90	3
3000K	3x470	>90	5

ALWAYS USE

power supply | 700mA (1 piece needed)

	CODE
20W dim	90225604
35W DALI	90245801

more power supplies on page 725 and accessories on page 744

back

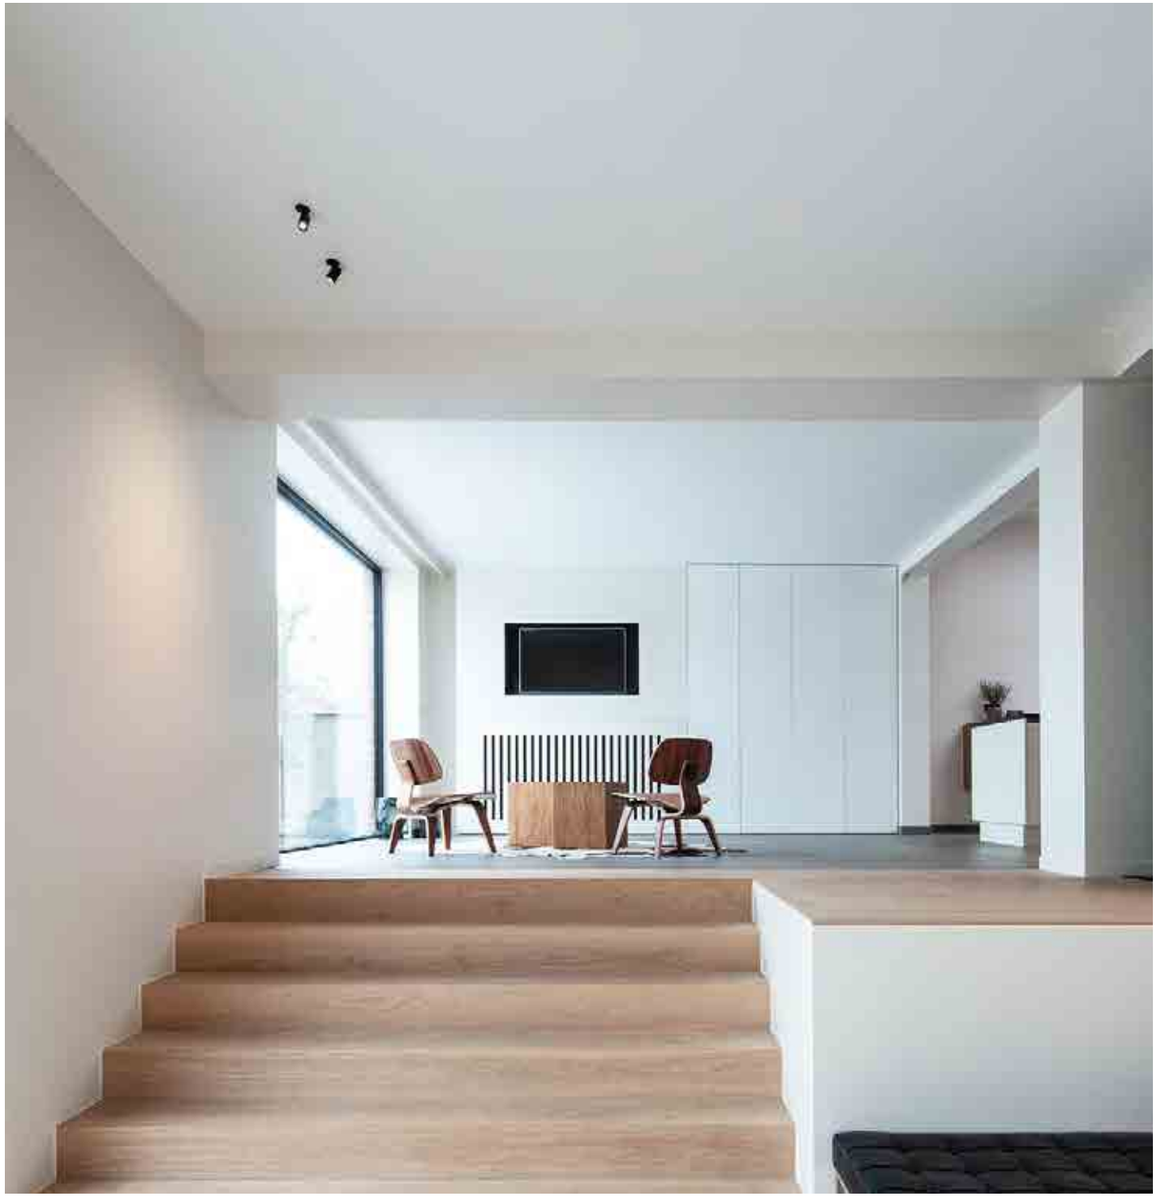

PRIVATE RESIDENCE GERMANY

BLIEK ROUND petit

CEILING RECESSED

60 mm
low recessed depth





1.0 LED

LED 6W | 700mA | 9V
COB 3-step | excl. power supply
aluminium powder coated

0.20kg IP20 0.3 P 35°

60° 355° 60

wire springs 86-89 4-23

	CODE
	164161W_
	164161K_
	164161B_

blade springs 86-89 min.6

	CODE
	164161W_C
	164161K_C
	164161B_C

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	440	>90	3
3000K	470	>90	5
1800-2700K	320	>95	9

ALWAYS USE

power supply | 700mA

	CODE
10W dim	90225402
10W DALI	90245401

more power supplies on page 725 and accessories on page 744

2.0 LED

LED 2x LED 6W | 700mA | 18V total
COB 3-step | excl. power supply
aluminium powder coated

0.40kg IP20 0.3 P 35°

60° 355° 60

wire springs 87-176 4-23

	CODE
	164261W_
	164261K_
	164261B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x440	>90	3
3000K	2x470	>90	5

ALWAYS USE

power supply | 700mA (1 piece needed)

	CODE
15W dim	90225502
35W DALI	90245801

more power supplies on page 725 and accessories on page 744

back

PRIVATE RESIDENCE BELGIUM

BLIEK ROUND

CEILING RECESSED

IC rated





1.0 LED

LED 7/10W | 350/500mA | 18V
COB 3-step | excl. power supply
aluminium powder coated

0.45kg IP20 0,3÷ P 36°

60° 355° 75

wire springs 126-130 4-25

	CODE
	125161W_
	125161K_
	125161B_

blade springs 126-130 min 10

	CODE
	125161W_C
	125161K_C
	125161B_C

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	480/650	>90	3
3000K	585/695	>90	5
4000K	630/840	>90	6
1800-2850K | 16V	340/460	>95	9

ALWAYS USE

power supply | 500mA

	CODE
10W	90214405
10W dim	90224402
12W DALI	90244402

more power supplies on page 724

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.42kg IP20 0,3÷

60° 350° 75

wire springs 127 4-25

	CODE
	125120W0
	125120K0
	125120B0

blade springs 127 min 10

	CODE
	125120W0C
	125120K0C
	125120B0C

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

back

PRIVATE RESIDENCE | ANKER & CO | LINK ARCHITECTURE DENMARK

SPYDER

CEILING RECESSED

B





1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium | steel powder coated

1.10kg IP20 0,3 36°

146-148 85° 355° 90 4-33

	CODE
	124161W_
	124161B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	490/660	>90	3
3000K	530/710	>90	5
1800-2850K | 16V	330/450	>95	9

ALWAYS USE

power supply | 500mA

	CODE
10W	90214405
10W dim	90224402
12W DALI	90244402

350mA power supplies on page 723

1.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium | steel powder coated

1.10kg IP20 0,3

146-148 85° 355° 90 4-33

	CODE
	124120W0
	124120B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

back

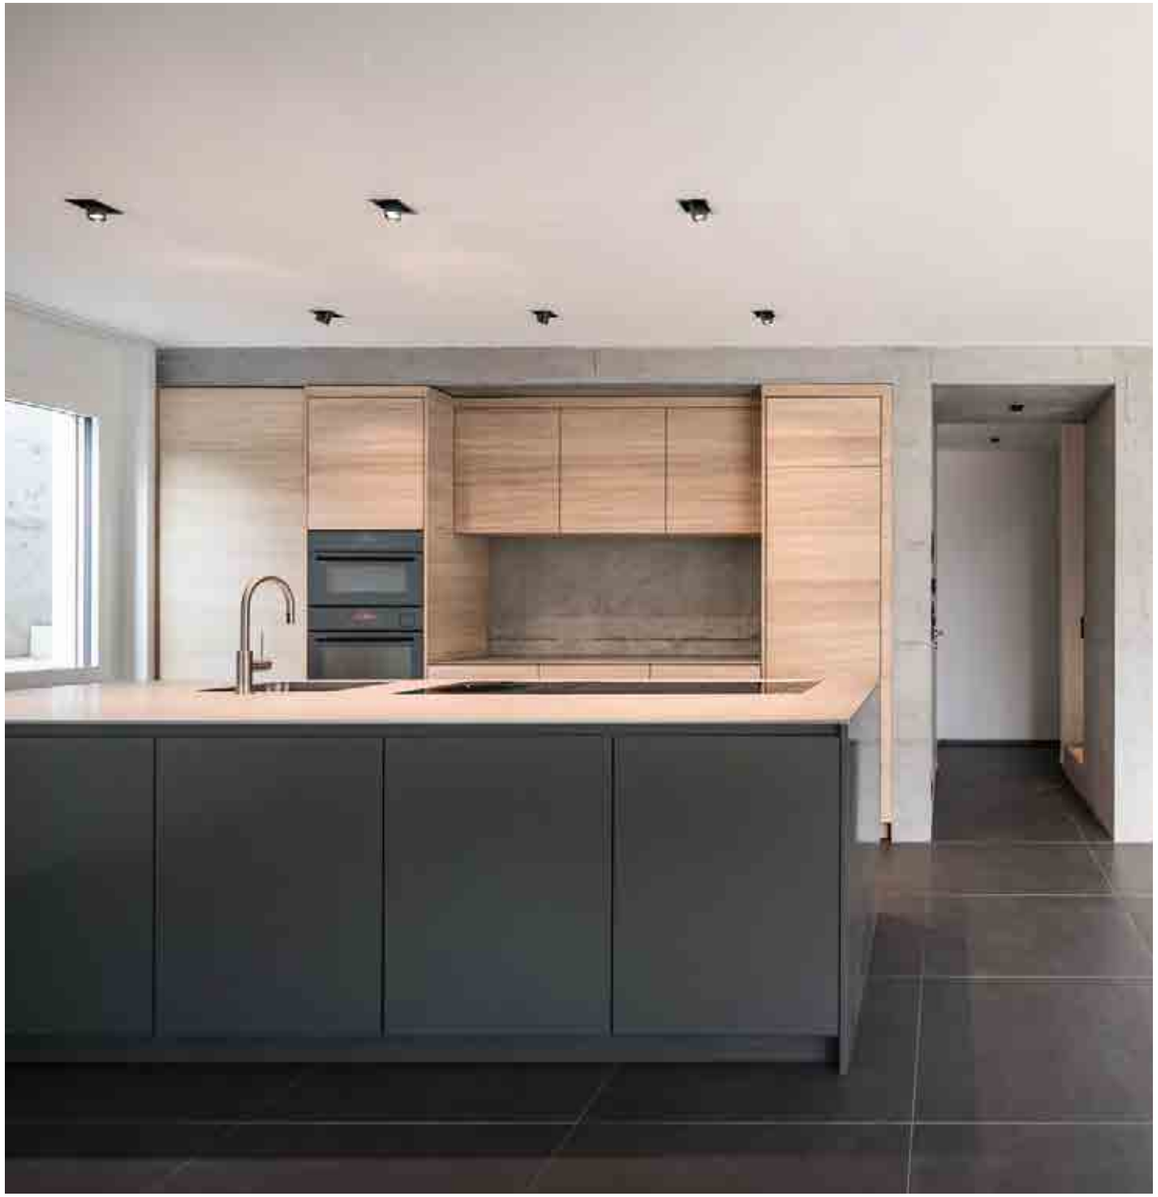

BLIEK SQUARE

CEILING RECESSED





1.0 LED

LED 7/10W | 350/500mA | 18V
COB 3-step | excl. power supply
aluminium powder coated

0.47kg | IP20 | 0,3-D | P | 36° | 111x111 | 60° | 355° | 75 | 4-25

	CODE
	125261W_
	125261B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	480/650	>90	3
3000K	585/695	>90	5
4000K	630/840	>90	6
1800-2850K | 16V	340/460	>95	9

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.45kg | IP20 | 0,3-D | 111x111 | 60° | 355° | 75 | 4-25

	CODE
	125220W0
	125220B0

ALWAYS USE

power supply | 500mA

	CODE
10W	90214405
10W dim	90224402
12W DALI	90244402

more power supplies on page 724

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

THEY'RE FUN TO BATHE WITH

SCARED OF WATER? NO WAY!

Keep knocking on the bathroom door all you want, IP44 luminaires will be in no hurry to leave, even less with IP65. Luminaires with the IP44 certification are protected against splashes and those with IP65 are resistant to water jets. They're every bit as comfortable in a SPA as they are above a shower. Don't have much space? Then choose a version with a low installation depth. They fit well in rooms with low ceiling heights as well, making even the smallest hotel bathrooms shine. By the way, many types of IP44 or IP65 luminaires are not only available as spots but in many more varieties, too.

WASSERSCHEU? VON WEGEN!

Eines ist sicher: Bei IP44-Leuchten kann man lange an die Badezimmertür klopfen – die kommen nicht raus. Bei IP65-Leuchten noch länger. Schließlich sind Leuchten mit der Zertifizierung IP44 optimal vor Spritzwasser und mit IP65 sogar vor einem Wasserstrahl geschützt. Und fühlen sich daher im SPA-Bereich genau so wohl, wie über der Dusche. Sie haben nur wenig Platz? Dann sind Versionen mit geringer Einbautiefe die perfekte Lösung. Sie passen auch in Räume mit niedriger Raumhöhe und bringen so selbst das kleinste Hotelbadezimmer zum Strahlen. Übrigens: IP44- oder IP65 Leuchten sind natürlich nicht nur als Spots, sondern auch in vielen anderen Ausführungen erhältlich.

DEEP BIJOU IP65	p. 235
DEEP IP44 | IP65	p. 237
DEEPER IP44	p. 239
TAIO IP65	p. 243
RINI IP44	p. 245
LUNA ROUND IP44	p. 247
RINI SNEAK IP44	p. 249
LUNA SQUARE IP44	p. 251
PLANO IP44	p. 253
MIRBI IP44	p. 255
CITY IP44	p. 257
ROB IP44	p. 329
ROBY IP44	p. 331
TOWNA IP44	p. 333
MIRBA IP44	p. 585
MIRBI LONG IP44	p. 587

back

DEEP bijou IP65

CEILING RECESSED

p. 593



1.0 LED

LED 4.5W | 500mA | 9Vf
COB 3-step | excl. power supply
aluminium powder coated

0.093kg IP65 0,3-D 6 30° 50-52 85 4-25

	CODE
	165361W_
	165361B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	360	>90	3
3000K	390	>90	5

ALWAYS USE

power supply IP20 | 500mA
phase-cut dim

	CODE
7W	90224301

power supply IP67 | 500mA

	CODE
7W	90214301

more power supplies on page 724



HOTEL MARTIN'S RENTMEESTERIJ | PCP ARCHITECTEN BILZEN | BELGIUM

IC rated

only LED version

DEEP IP44 | IP65

CEILING RECESSED

p. 593





1.0 LED

LED 6/9W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated

0.24kg IP65 0,3 6 36°

90

wire springs 86-89 4-27

	CODE
	184161W_
	184161B_

blade springs 86-89 min 4

	CODE
	184161W_C
	184161B_C

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	375/575 | >90	3
3000K	405/620 | >90	5

ALWAYS USE

power supply IP20 | 500mA

	CODE
10W	90214405
10W dim	90224402

power supply IP68 | 500mA

	CODE
24W	90214702

more power supplies on page 724

1.0 MR16

QR-CBC51 max. 12W | GU5.3
12V | excl. power supply
aluminium powder coated

0.26kg IP44 0,3 6

90

wire springs 86-89 4-25

	CODE
	112610W0
	112610B0

blade springs 86-89 min 8

	CODE
	112610W0C
	112610B0C

ALWAYS USE

power supply | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

more specs on page 727

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.30kg IP44 0,3 6

105

wire springs 86-89 4-25

	CODE
	112620W0
	112620B0

blade springs 86-89 min 8

	CODE
	112620W0C
	112620B0C

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

HOTEL NOBIS | WINGÅRDHS | ANKER & CO COPENHAGEN | DENMARK

DEEPER IP44

CEILING RECESSED







1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated

0.17kg | IP44 | 36° | 76-79 | 95 | 4-38

	CODE
	152261W_
	152261B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	440/600	>90	3
3000K	500/650	>90	5
1800-2850K | 16V	280/370	>95	9

ALWAYS USE

power supply | 500mA

	CODE
10W	90214405
10W dim	90224402
12W DALI	90244402

350mA power supplies on page 723

1.0 MR16

QR-CBC51 max. 12W | GU5.3
12V | excl. power supply
aluminium powder coated

0.11kg | IP44 | 76-79 | 100 | 4-38

	CODE
	152210W0
	152210B0

ALWAYS USE

power supply | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

more specs on page 727

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.15kg | IP44 | 76-79 | 115 | 4-38

	CODE
	152220W0
	152220B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

back

HOTEL THE KRANE | ARCGENCY BY MADS MØLLER | ANKER & CO COPENHAGEN | DENMARK

back

PRIVATE RESIDENCE AUSTRIA

IC rated

TAIO ROUND IP65

CEILING RECESSED

p. 335 p. 597 p. 601 p. 635

1.0 LED

LED 6/9W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
opal glass lens

0.13kg IP65 0,3 6

70 70 4-27

	CODE
	180181W_
	180181G_
	180181B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	310/425	>90	3
3000K	335/455	>90	5

ALWAYS USE

power supply IP20 | 500mA

	CODE
10W	90214405
10W dim	90224402

power supply IP68 | 500mA

	CODE
24W	90214702

more power supplies on page 724

Rev. 001/2021-07

back

SHOP CAMERON | DEJAEGER INTERIEURARCHITECTEN ZWEVEGEM | BELGIUM

RINI IP44

CEILING RECESSED

1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated

0.16 kg | IP44 | 0.3-step | 6 | 36°

76-79 | 60 | 4-25

	CODE
	154161W_
	154161B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	480/650	>90	3
3000K	520/700	>90	5
1800-2850K | 16V	300/400	>95	9

1.0 MR16

QR-CBC51 max. 12W | GU5.3
12V | excl. power supply
aluminium powder coated

0.10 kg | IP44 | 0.3-step | 6

76-79 | 70 | 4-25

	CODE
	154110W0
	154110B0

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.14 kg | IP44 | 0.3-step | 6

76-79 | 95 | 4-25

	CODE
	154120W0
	154120B0



only for LED version

ALWAYS USE

power supply | 500mA

	CODE
10W	90214405
10W dim	90224402
12W DALI	90244402

350mA power supplies on page 723

ALWAYS USE

power supply | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

more specs on page 727

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

back

LUNA ROUND IP44

CEILING RECESSED





1.0 LED HV

LED 7W | 220-240VAC
PCB 3-step | phase-cut dim
aluminium | stainless steel
opal PMMA cover | polyamide

0.18kg | IP44 | 76-79 | 50 | 8-15

	CODE
	114388W_
	114388M_
	114388B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	350	>90	5

1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium | stainless steel
opal glass cover | polyamide

0.19kg | IP44 | 76-83 | 100 | min 4

	CODE
	114381W_
	114381M_
	114381B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	380/510	>90	3
3000K	410/550	>90	5
1800-2850K | 16V	230/320	>95	9

1.0 MR16

QR-CBC51 max.10W | GU5.3
12V | excl. power supply
aluminium | stainless steel
opal glass cover | polyamide

0.28kg | IP44 | 76-83 | 100 | min 4

	CODE
	114110W0
	114110M0
	114110B0

1.0 PAR16

PAR16 max. 10W | GU10
100-240VAC | 50-60Hz
aluminium | stainless steel
opal glass cover | polyamide

0.24kg | IP44 | 76-83 | 120 | min 4

	CODE
	114120W0
	114120M0
	114120B0

OPTIONAL

dimmer

	CODE
phase-cut + bluetooth	90019100

more dimmers and specs on page 728



only for LED HV version

ALWAYS USE

power supply | 500mA

	CODE
10W	90214405
10W dim	90224402
12W DALI	90244402

350mA power supplies on page 723

OPTIONAL

	CODE
plasterkit	90017101

ALWAYS USE

power supply | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

more specs on page 727

OPTIONAL

	CODE
plasterkit	90017101

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

	CODE
plasterkit	90017101

back

PRIVATE RESIDENCE BELGIUM

RINI SNEAK IP44

CEILING RECESSED



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated

0.18 kg | IP44 | 0,3 | 6 | 36°

76-79 | 46 | 4-25

	CODE
	154261W_
	154261B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	470/630	>90	3
3000K	500/680	>90	5
1800-2850K | 16V	290/390	>95	9

ALWAYS USE

power supply | 500mA

	CODE
10W	90214405
10W dim	90224402
12W DALI	90244402

350mA power supplies on page 723



1.0 MR16

QR-CBC51 max. 12W | GU5.3
12V | excl. power supply
aluminium powder coated

0.12 kg | IP44 | 0,3 | 6

76-79 | 55 | 4-25

	CODE
	154210W0
	154210B0

ALWAYS USE

power supply | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

more specs on page 727



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.16 kg | IP44 | 0,3 | 6

76-79 | 80 | 4-25

	CODE
	154220W0
	154220B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729



only for LED version

back

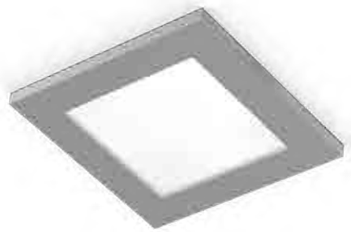

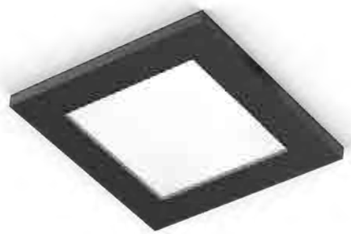



only for LED HV version

LUNA SQUARE IP44

CEILING RECESSED



1.0 LED HV

LED 7W | 220-240VAC
PCB 3-step | phase-cut dim
aluminium | stainless steel
opal PMMA cover | polyamide

0.19kg | IP44 | 3-step | P

72x72 | 50 | 8-15

	CODE
	114488W_
	114488M_
	114488B_

LIGHT COLOUR	LUMEN | CRI	CODE
3000K	350 | >90	5

OPTIONAL

dimmer

	CODE
phase-cut + bluetooth	90019100

more dimmers and specs on page 728



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium | stainless steel
opal glass cover | polyamide

0.20kg | IP44 | 3-step | G

76x76 | 100 | 8-15

	CODE
	114481W_
	114481M_
	114481B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	380/510 | >90	3
3000K	410/550 | >90	5
1800-2850K | 16V	230/320 | >95	9

ALWAYS USE

power supply | 500mA

	CODE
10W	90214405
10W dim	90224402
12W DALI	90244402

350mA power supplies on page 723

OPTIONAL

	CODE
plasterkit	90017102



1.0 MR16

QR-CBC51 max. 10W | GU5.3
12V | excl. power supply
aluminium | stainless steel
opal glass cover | polyamide

0.28kg | IP44 | 3-step | G

76x76 | 100 | 8-15

	CODE
	114210W0
	114210M0
	114210B0

ALWAYS USE

power supply | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

more specs on page 727

OPTIONAL

	CODE
plasterkit	90017102



1.0 PAR16

PAR16 max. 10W | GU10
100-240VAC | 50-60Hz
aluminium | stainless steel
opal glass cover | polyamide

0.26kg | IP44 | 3-step | G

76x76 | 120 | 8-15

	CODE
	114220W0
	114220M0
	114220B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

	CODE
plasterkit	90017102

PRIVATE RESIDENCE OBUMEX – STEENOVEN BELGIUM

PLANO IP44

CEILING RECESSED







1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated

0.21kg IP44 0,3 6 36° 74x78 90 4-30

	CODE
	118461W_
	118461B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	510/695 | >90	3
3000K	550/740 | >90	5
1800-2850K | 16V	300/390 | >95	9

ALWAYS USE

power supply | 500mA

	CODE
10W	90214405
10W dim	90224402
12W DALI	90244402

more power supplies on page 724

1.0 MR16

QR-CBC51 max. 35W | GU5.3
12V | excl. power supply
aluminium powder coated

0.15kg IP44 0,3 6 74x78 115 4-30

	CODE
	118410W0
	118410B0

ALWAYS USE

power supply | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

more specs on page 727

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.19kg IP44 0,3 6 74x78 115 4-30

	CODE
	118420W0
	118420B0

ALWAYS USE

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

back

OFFICE VIENNA | AUSTRIA

MIRBI IP44

CEILING RECESSED

p. 337 p. 587





1.0

LED 7W | 220-240VAC
PCB 3-step | phase-cut dim
clear + opal PMMA cover

0.24kg | IP44 | 0,3 | P

76-79 | 50 | 8-15

	CODE
	1145880_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	510	>90	5

OPTIONAL

dimmer

	CODE
phase-cut + bluetooth	90019100

more dimmers and specs on page 728

2.0

LED 7W | 220-240VAC
PCB 3-step | phase-cut dim
clear + opal PMMA cover

0.26kg | IP44 | 0,3 | P

72x72 | 50 | 2-25

	CODE
	1146880_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	510	>90	5

OPTIONAL

dimmer

	CODE
phase-cut + bluetooth	90019100

more dimmers and specs on page 728



back

HOTEL MARTIN'S RENTMEESTERIJ | PCP ARCHITECTEN BILZEN | BELGIUM

CITY IP44

CEILING RECESSED

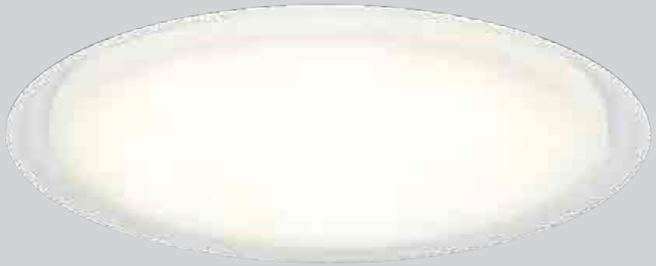

ø210

ø305

ø395

1.6

LED 13W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
opal PMMA cover

0.64 kg IP44 0,3 202-205 50 4-22

	CODE
	115184W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	770	>90	3
3000K	840	>90	5

2.6

LED 18W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
opal PMMA cover

1.05 kg IP44 0,3 297-300 50 4-22

	CODE
	115284W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1160	>90	3
3000K	1260	>90	5

3.5

LED 32W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
opal PMMA cover

1.70 kg IP44 0,3 387-390 50 4-22

	CODE
	115384W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1730	>90	3
3000K	1850	>90	5



back

CEILING SURFACE

p. 259 — 337

CEILING SURFACE SPOTLIGHTS

RAY MINI
p. 261

RAY
p. 263

BOX MINI
p. 269

BOX
p. 271

DOCUS MINI
p. 277

DOCUS
p. 279

HEXO MINI
p. 283

HEXO
p. 285

PIRRO 4.1
p. 289

PIRRO 4.0
p. 291

PIRRO OPAL
p. 293

SOLID PETIT 1.0
p. 295

SOLID PETIT 2.0
p. 295

SOLID
p. 299

SIRRA
p. 303

SIRRO
p. 305

SARA ON BASE
p. 309

SQUBE ON BASE
p. 311

CENO
p. 317



MICK
p. 319

CEILING SURFACE LUMINAIRES

CLEA
p. 323

CLOCK
p. 325



VENN
p. 327

CEILING SURFACE IP-RATED

ROB IP44
p. 329

ROBY IP44
p. 331

TOWNA IP44
p. 333

TAIO ROUND IP65
p. 335

MIRBI IP44 1.0
p. 337

MIRBI IP44 2.0
p. 337

DESIGNER FAMILIES

ROOMOR OFFICE
p. 37

MIRRO
p. 55

DRO
p. 69

WIRO
p. 91

J.J.W.
p. 133

HOTEL MARTIN'S RENTMEESTERIJ | PCP ARCHITECTEN BILZEN | BELGIUM

RAY mini

CEILING SURFACE

p. 357 p. 525

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.14kg IP20

	CODE
	258220W0
	258220G0
	258220Q0
	258220B0

OPTIONAL

inner reflector max. 10W
wet painted polycarbonate

	CODE
	900199W4
	900199G4
	900199Q4
	900199B4

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

back

HOTEL MÜHLE | ARCHITECT DI RAINER SCHÖPF OBERGURGL | AUSTRIA

RAY

CEILING SURFACE

p. 387
p. 399
p. 425
p. 527
p. 607
p. 633

1.0 LED

LED 8W | 220-240VAC
50-60Hz | COB 3-step
aluminium powder coated
brushed

0.70kg IP20 32°

phase-cut dim

	CODE
	146764W_
	146764L_
	146764G_
	146764Q_
	146764P_
	146764B_

DALI dim | 10W

	CODE
	146765W_
	146765L_
	146765G_
	146765Q_
	146765P_
	146765B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	580 | >80	2
3000K	610 | >80	4
1800-2850K	390 | >95	9

1800-2850K available only for phase-cut dim

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.61kg IP20

	CODE
	146720W0
	146720L0
	146720G0
	146720Q0
	146720P0
	146720B0

OPTIONAL

single inner cover max. 10W
aluminium powder coated brushed

	CODE
	911041W1
	911041G1
	911041B1

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

back

MAISON ME BOUTIQUE HOTEL | ARCHITECT ALICE PIUBELLO BARDOLINO LAKE GARDA | ITALY

HAVE A LOOK
weverducre.com/universal-stars-configurator

MIX AND MATCH

THE MAGIC CUBE

Remember that small magic cube we just couldn't put down in the 80s? Then you will love BOX. It has an almost infinite number of variations for you to try – not just in terms of colour and size. BOX is incredibly flexible when it comes to insets and lamps. Grab a double espresso and start mixing and matching. Not really into cubes? Then try taking a fantastic HEXO, DOCUS, or RAY luminaire home with you. Use our online configurator to put it together exactly how you like it.

Können Sie sich noch an den magischen kleinen Würfel erinnern, den wir in den 80ern einfach nicht aus der Hand legen konnten? Dann werden Sie BOX lieben. Denn auch mit ihr lassen sich nahezu unendlich viele Varianten durchprobieren. Und das nicht nur in puncto Farben und Größe. Auch bei Insets und Leuchtmitteln ist BOX mehr als nur flexibel. Also einfach einen doppelten Espresso schnappen und loskombinieren. Würfel sind nicht so Ihr Ding? Dann können Sie sich mit HEXO, DOCUS oder RAY auch andere tolle Leuchtenformen dieser Serie nach Hause holen. Und sie sich mit unserem Online-Konfigurator gleich selbst zusammenstellen.

SHADE COLOUR

INNER REFLECTOR COLOUR

INNER COVER COLOUR



BOX MINI
GOLD INNER REFLECTOR

BOX MINI
WITHOUT INSETS

WITHOUT
INSETS

BLACK
INNER COVER

GOLD
INNER COVER

WHITE
INNER REFLECTOR

BLACK
INNER REFLECTOR

GOLD
INNER REFLECTOR

BOX mini

CEILING SURFACE

p. 359 p. 533



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.16kg IP20

	CODE
	258120W0
	258120G0
	258120Q0
	258120B0

OPTIONAL

inner reflector max. 10W
wet painted polycarbonate

	CODE
	900199W1
	900199G1
	900199Q1
	900199B1

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

back

PRIVATE RESIDENCE | SUÑER ARQUITECTOS SPAIN

OPTIONAL

single inner reflector max. 10W
wet painted polycarbonate

	CODE
	911211W1
	911211G1
	911211B1

single inner cover max. 10W
aluminium powder coated brushed

	CODE
	911011W1
	911011G1
	911011B1

BOX

CEILING SURFACE

p. 427 p. 535 p. 611 p. 641





1.0 LED

LED 8W | 220-240VAC
50-60Hz | COB 3-step
aluminium powder coated
brushed

0.74kg IP20 0,3÷ P 32°

phase-cut dim

	CODE
	146164W_
	146164L_
	146164G_
	146164Q_
	146164P_
	146164B_

DALI dim | 10W

	CODE
	146165W_
	146165L_
	146165G_
	146165Q_
	146165P_
	146165B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	540 | >80	2
3000K	560 | >80	4
1800-2850K	390 | >95	9

1800-2850K available only for
phase-cut dim

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.66kg IP20 0,3÷

	CODE
	146120W0
	146120L0
	146120G0
	146120Q0
	146120P0
	146120B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

back

PRIVATE RESIDENCE | PETER PLAN BELGIUM

BOX

CEILING SURFACE





OPTIONAL

double inner reflector max. 10W
wet painted polycarbonate

	CODE
	911251W1
	911251G1
	911251B1

single inner cover max. 10W
aluminium powder coated brushed
2 pieces needed

	CODE
	911011W1
	911011G1
	911011B1

2.0 LED

2x LED 8W | 220-240VAC
50-60Hz | COB 3-step
aluminium powder coated
brushed | phase-cut dim

1.08kg IP20 0,3+ P 32°

	CODE
	146264W_
	146264L_
	146264G_
	146264Q_
	146264P_
	146264B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	2x540 | >80	2
3000K	2x560 | >80	4
1800-2850K	2x390 | >95	9

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

1.13kg IP20 0,3+

	CODE
	146220W0
	146220L0
	146220G0
	146220Q0
	146220P0
	146220B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

back

OFFICE INARTO | INARTO ARCHITECTEN HERENTALS | BELGIUM

OPTIONAL

inner reflector max. 10W
wet painted polycarbonate

	CODE
	900199W2
	900199G2
	900199B2

back

DOCUS mini

CEILING SURFACE

p. 361 p. 541



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.16kg IP20

	CODE
	258320W0
	258320G0
	258320B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

SHOP | CANOTTI PANE DOLCE E CAFFÈ | FLUSSOCREATIVO DESIGN STUDIO TRAVAGLIATO | ITALY

DOCUS

CEILING SURFACE

p. 429





OPTIONAL

single inner cover max. 10W
aluminium powder coated brushed

	CODE
	911021W1
	911021G1
	911021B1

1.0 LED

LED 8W | 220-240VAC
50-60Hz | COB 3-step
aluminium powder coated
brushed

0.63kg IP20 32°

phase-cut dim

	CODE
	146364W_
	146364L_
	146364G_
	146364P_
	146364B_

DALI dim | 10W

	CODE
	146365W_
	146365L_
	146365G_
	146365P_
	146365B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	540 | >80	2
3000K	560 | >80	4
1800-2850K	390 | >95	9

1800-2850K available only for
phase-cut dim

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.55kg IP20

	CODE
	146320W0
	146320L0
	146320G0
	146320P0
	146320B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

back

HOTEL HOWARD | ROQUE INTÉRIEURS PARIS | FRANCE

DOCUS

CEILING SURFACE





2.0 LED

LED 2x LED 8W | 220-240VAC
50-60Hz | COB 3-step
aluminium powder coated
brushed | phase-cut dim

0.92kg IP20 0,3 P 32°

	CODE
	146464W_
	146464L_
	146464G_
	146464P_
	146464B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	2x540 | >80	2
3000K	2x560 | >80	4
1800-2850K	2x390 | >95	9

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

1.01kg IP20 0,3

	CODE
	146420W0
	146420L0
	146420G0
	146420P0
	146420B0

OPTIONAL

single inner cover max. 10W
aluminium powder coated brushed
2 pieces needed

	CODE
	911021W1
	911021G1
	911021B1

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

back

THINK URBAN | DEGRAER INTERIEURARCHITECTEN KORTRIJK | BELGIUM

HEXO mini

CEILING SURFACE

p. 363 p. 543

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.15kg IP20

OPTIONAL

inner reflector max. 10W
wet painted polycarbonate

	CODE
	900199W3
	900199G3
	900199Q3
	900199B3

	CODE
	258420W0
	258420G0
	258420Q0
	258420B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

back

PRIVATE RESIDENCE | CONCEPT'N BELGIUM

HEXO

CEILING SURFACE

p. 387
p. 399
p. 431

OPTIONAL

single inner cover max. 10W
aluminium powder coated brushed

CODE
911031W1
911031G1
911031B1



1.0 LED

LED 8W | 220-240VAC
50-60Hz | COB 3-step
aluminium powder coated
brushed

0.72kg IP20 0,3+ 32°

phase-cut dim

CODE
146564W_
146564G_
146564Q_
146564P_
146564B_

DALI dim | 10W

CODE
146565W_
146565G_
146565Q_
146565P_
146565B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	540 | >80	2
3000K	560 | >80	4
1800-2850K	390 | >95	9

1800-2850K available only for
phase-cut dim



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.63kg IP20 0,3+

CODE
146520W0
146520G0
146520Q0
146520P0
146520B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

CODE
2700K | white 901228W2
2700K | black 901228B3
3000K | white 901228W4
3000K | black 901228B5

more lamps and specs on page 729

back

THE SILO | COBE ARCHITECTS | ANKER & CO COPENHAGEN | DENMARK

HEXO

CEILING SURFACE





2.0 LED

2x LED 8W | 220-240VAC
50-60Hz | COB 3-step
aluminium powder coated
brushed

1.13kg IP20 0,3-D P 32°

phase-cut dim

	CODE
	146664W_
	146664G_
	146664Q_
	146664P_
	146664B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	2x540 | >80	2
3000K	2x560 | >80	4
1800-2850K	2x390 | >95	9

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

1.19kg IP20 0,3-D

	CODE
	146620W0
	146620G0
	146620Q0
	146620P0
	146620B0

OPTIONAL

single inner cover max. 10W
aluminium powder coated brushed
2 pieces needed

	CODE
	911031W1
	911031G1
	911031B1

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

back

PRIVATE RESIDENCE GERMANY

PIRRO

CEILING SURFACE

p. 189 p. 409

E

J

K

B





1.0

LED 7W | 220-240VAC
50-60Hz | COB 3-step | incl. PS
phase-cut dim aluminium
powder coated | PC lens and
reflector

0.20kg IP20 32°

	CODE
	151151E_
	151151J_
	151151K_
	151151B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	380	>90	3
3000K	405	>90	5

accessories on page 744

4.1

LED 4x LED 5W | 220-240VAC
50-60Hz | COB 3-step | incl. PS
phase-cut dim | aluminium
powder coated | PC lens and
reflector

0.50kg IP20 32°

	CODE
	151461E_
	151461J_
	151461K_
	151461B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x380	>90	3
3000K	4x405	>90	5

accessories on page 744

back

PRIVATE RESIDENCE | PETER PLAN BELGIUM

PIRRO

CEILING SURFACE

p. 189 p. 409







2.0

LED 2x LED 5W | 220-240VAC
50-60Hz | COB 3-step | incl. PS
phase-cut dim | aluminium
powder coated | PC lens and
reflector

0.30kg IP20 0,3 P 32°

	CODE
	151251E_
	151251J_
	151251K_
	151251B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x380	>90	3
3000K	2x405	>90	5

accessories on page 744

4.0

LED 4x LED 5W | 220-240VAC
50-60Hz | COB 3-step | incl. PS
phase-cut dim | aluminium
powder coated | PC lens and
reflector

0.48kg IP20 0,3 P 32°

	CODE
	151451E_
	151451J_
	151451K_
	151451B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x380	>90	3
3000K	4x405	>90	5

accessories on page 744

6.0

LED 6x LED 5W | 220-240VAC
50-60Hz | COB 3-step | incl. PS
phase-cut dim | aluminium
powder coated | PC lens and
reflector

0.80kg IP20 0,3 P 32°

	CODE
	151651E_
	151651J_
	151651K_
	151651B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	6x380	>90	3
3000K	6x405	>90	5

accessories on page 744

back

PRIVATE RESIDENCE | BAUBUREAU OG 27 | LINEAR 54 SWITZERLAND

PIRRO OPAL

CEILING SURFACE

p. 189 p. 409

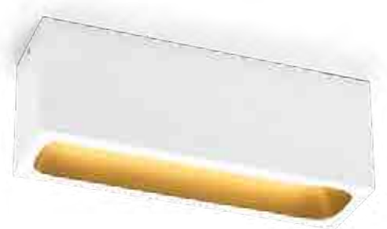





2.0

LED 7W | 220-240VAC
50-60Hz | PCB 3-step | incl. PS
phase-cut dim | aluminium
powder coated |opal PMMA cover

0.30kg IP20

	CODE
	151281E_
	151281J_
	151281K_
	151281B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	240	>90	3
3000K	260	>90	5

4.0

LED 12W | 220-240VAC
50-60Hz | PCB 3-step | incl. PS
phase-cut dim | aluminium
powder coated | opal PMMA cover

0.52kg IP20

	CODE
	151481E_
	151481J_
	151481K_
	151481B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	550	>90	3
3000K	580	>90	5

available from summer 2021

back

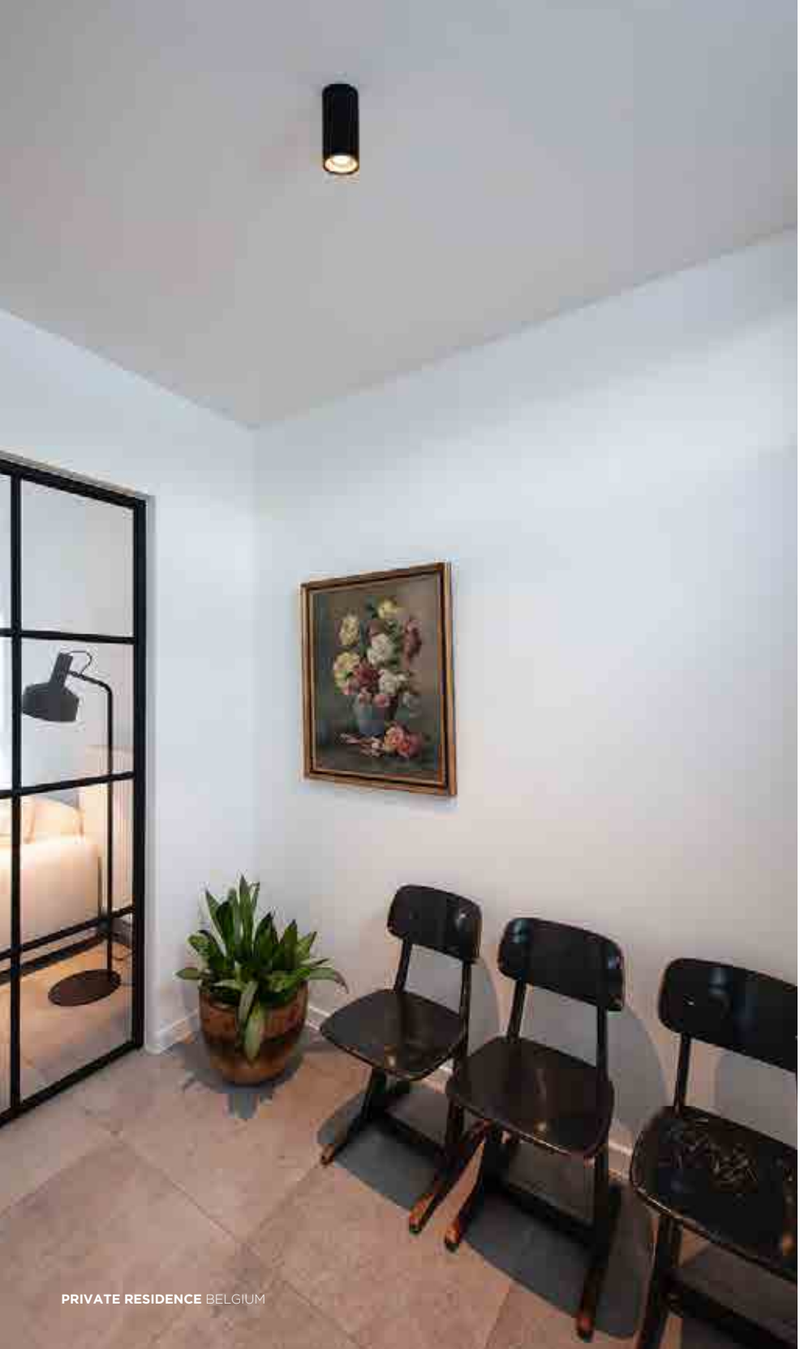

PRIVATE RESIDENCE BELGIUM

SOLID petit

CEILING SURFACE

1.0 LED

LED 6W | 220-240V | 50-60Hz
incl. PS | phase-cut dim
aluminium powder coated

0.32kg IP20 0,3-P 32°

	CODE
	133564W_
	133564J_
	133564K_
	133564B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	335	>90	3
3000K	350	>90	5

2.0 LED

LED 8W | 220-240V | 50-60Hz
incl. PS | phase-cut dim
aluminium powder coated

0.42kg IP20 0,3-P 34°
25°/25° 355°

	CODE
	133464W_
	133464J_
	133464K_
	133464B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	540	>90	3
3000K	570	>90	5
1800-2700K	360	>95	9

back

PRIVATE RESIDENCE | ATELIER FB FRANCE

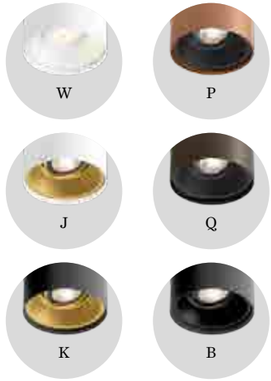

Rev. 001/2021-06

SOLID

CEILING SURFACE





1.0 LED

LED 12W | 220-240VAC
50-60Hz | COB 3-step | incl. PS
aluminium powder coated

0.65kg IP20 0.3-1 P 36°

25°/25° 355°

phase-cut dim

	CODE
	133264W_
	133264J_
	133264K_
	133264P_
	133264Q_
	133264B_

DALI dim

	CODE
	133365W_
	133365J_
	133365K_
	133365P_
	133365Q_
	133365B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	746 | >90	3
3000K	770 | >90	5
1800-2850K	410 | >95	9

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.61kg IP20 0.3-1

25°/25° 355°

	CODE
	133120W0
	133120J0
	133120K0
	133120P0
	133120Q0
	133120B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

back

RELESYS I LOBO-LAB ARCHITECTS I ANKER & CO COPENHAGEN | DENMARK

PRIVATE RESIDENCE BELGIUM

SIRRA

CEILING SURFACE





1.0 LED

LED 10W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.86kg IP20 0,3+ P 36°

35°/35° 355°

	CODE
	134164W_
	134164E_
	134164B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	710	>90	3
3000K	770	>90	5
1800-2850K	440	>95	9

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.74kg IP20 0,3+

35°/35° 355°

	CODE
	134120W0
	134120E0
	134120B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

back

FAIR BOOTH | BIS BEURS | GINO VANHOUTTE GENT | BELGIUM

SIRRO

CEILING SURFACE





1.0 LED

LED 10W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.85kg IP20 0,3+ P 36°

35°/35° 355°

	CODE
	139164W_
	139164E_
	139164B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	710	>90	3
3000K	770	>90	5
1800-2850K	440	>95	9

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.81kg IP20 0,3+

35°/35° 355°

	CODE
	139120W0
	139120E0
	139120B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

back

OFFICE | DEUTSCHE WOHNWERTE | BRANDHERM + KRUMREY HAMBURG HEIDELBERG | GERMANY

SIRRO

CEILING SURFACE



2.0 LED

LED 2x LED 10W | 220-240VAC
50-60Hz | COB 3-step
incl. PS | phase-cut dim
aluminium powder coated
brushed

1.57kg IP20 0,3-step P 36°

35°/35° 355°

	CODE
	139264W_
	139264E_
	139264B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	2x710 | >90	3
3000K	2x770 | >90	5
1800-2850K	2x440 | >95	9



3.0 LED

LED 3x LED 10W | 220-240VAC
50-60Hz | COB 3-step
incl. PS | phase-cut dim
aluminium powder coated
brushed

2.21kg IP20 0,3-step P 36°

35°/35° 355°

	CODE
	139364W_
	139364E_
	139364B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	3x710 | >90	3
3000K	3x770 | >90	5
1800-2850K	3x440 | >95	9



2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

1.51kg IP20 0,3-step

35°/35° 355°

	CODE
	139220W0
	139220E0
	139220B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729



3.0 PAR16

3x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

1.51kg IP20 0,3-step

35°/35° 355°

	CODE
	139320W0
	139320E0
	139320B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

back

RIVER STONE | ZOOI INTERIOR STUDIO KIEV | UKRAINE

SARA on base

CEILING SURFACE

p. 379 p. 551





1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | aluminium
powder coated

0.23kg IP20 ≈0,3>

90°

	CODE
	157220W0
	157220G0
	157220K0
	157220B0

1.1 PAR16

PAR16 max. 12W | GU10
100-240VAC | aluminium
powder coated

0.32kg IP20 ≈0,3>

90° 330°

	CODE
	157420W0
	157420K0
	157420B0

3.0 PAR16

3x PAR16 max. 12W | GU10
100-240VAC | aluminium
powder coated

0.74kg IP20 ≈0,3>

90° 330°

	CODE
	157520W0
	157520K0
	157520B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

back

PRIVATE RESIDENCE BELGIUM

PAR16

LED

for LED version inner ring is always black

SQUBE on base

CEILING SURFACE

p. 381
p. 391







1.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
aluminium powder coated

0.43kg IP20 39° 90°

	CODE
	144264W_
	144264B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	415	>80	2
3000K	430	>80	4
1800-3000K	350	>80	9

OPTIONAL

dimmer

	CODE
phase-cut + bluetooth	90019100

more dimmers and specs on page 728

2.0 LED

LED 12W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
aluminium powder coated

0.44kg IP20 90°

	CODE
	144464W_
	144464B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K | 32°	711	>80	2
3000K | 32°	790	>80	4
1800-3000K | 58°	790	>80	9

OPTIONAL

dimmer

	CODE
phase-cut + bluetooth	90019100

more dimmers and specs on page 728

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.43kg IP20 90°

	CODE
	144220W0
	144220B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

Rev. 001/2021-06

PRIVATE RESIDENCE | ANKER & CO | LINK ARCHITECTURE DENMARK

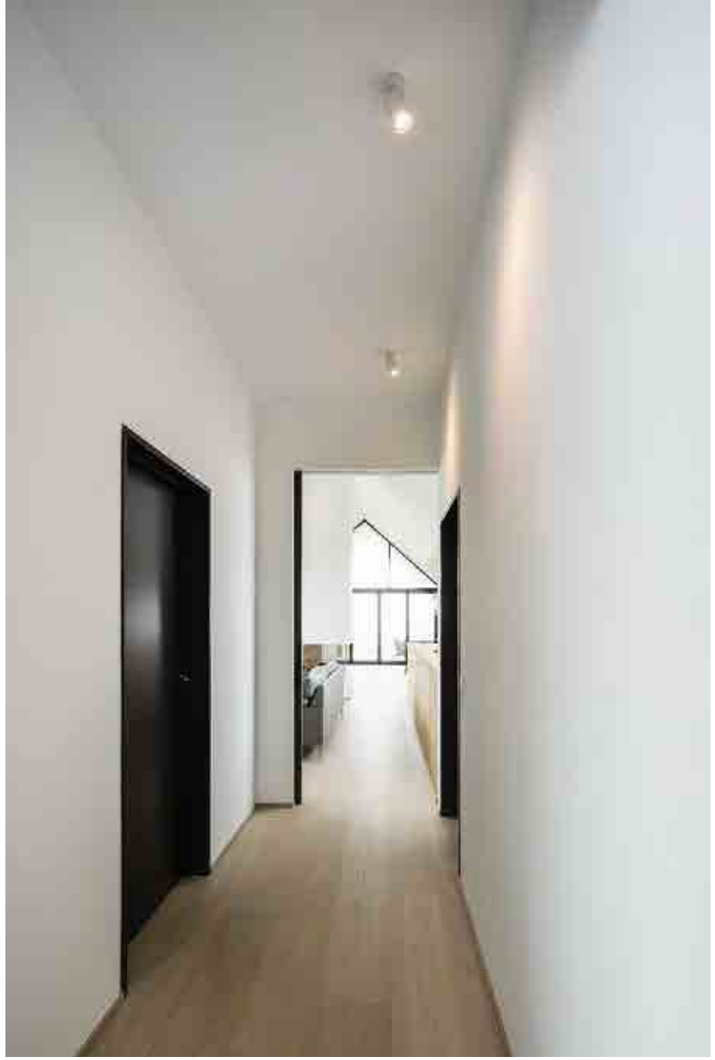

PRIVATE RESIDENCE | LANCO DESIGN BELGIUM

SQUBE on base

CEILING SURFACE

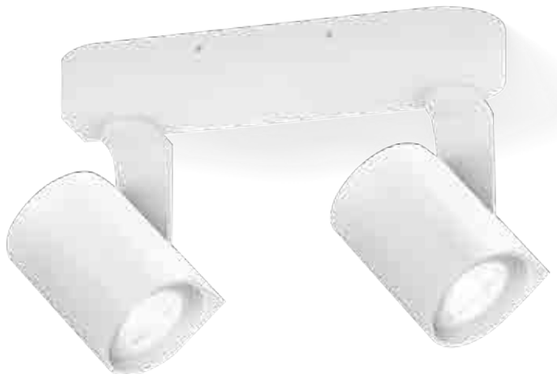





#2 PAR16

2x PAR16 max. 12W | GU10
100-240VAC
aluminium powder coated

0.58kg IP20 ≤0,3

90° 355°

	CODE
	144520W0
	144520B0

#3 PAR16

3x PAR16 max. 12W | GU10
100-240VAC
aluminium powder coated

0.93kg IP20 ≤0,3

90° 355°

	CODE
	144620W0
	144620B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

back

PRIVATE RESIDENCE GERMANY

CENO

CEILING SURFACE

p. 219
p. 349
p. 397

GOOD DESIGN

As awarded by The Chicago Athenaeum: Museum of Architecture and Design







2.0

LED 2x LED 7W | 220-240VAC 50-60Hz | COB 3-step | phase-cut dim | incl. PS | aluminium powder coated | brushed

0.43kg IP20 0.3+D P 35°

90° 350°

	CODE
	166361W_
	166361Q_
	166361K_
	166361B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	2x440 | >90	3
3000K	2x470 | >90	5

accessories on page 744

4.0

LED 4x LED 7W | 220-240VAC 50-60Hz | COB 3-step | phase-cut dim | incl. PS | aluminium powder coated | brushed

0.95kg IP20 0.3+D P 35°

90° 350°

	CODE
	166761W_
	166761Q_
	166761K_
	166761B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	4x440 | >90	3
3000K	4x470 | >90	5

accessories on page 744

SHOP AUSTRIA

MICK

CEILING SURFACE

p. 353 p. 555

DESIGNED BY
S&R CORNELISSEN

As awarded by The Chicago Athenaeum: Museum of Architecture and Design

reddot winner 2020
lighting design





1.0

LED 15W | 220-240VAC
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.35kg IP20 0,3-

18° 90° 350°

	CODE
	159154J_
	159154K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	400	>90	3
3000K	400	>90	5

2.0

LED 2x LED 2x7.5W | 220-240VAC
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.62kg IP20 0,3-

18° 90° 350°

	CODE
	159254J_
	159254K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x230	>90	3
3000K	2x250	>90	5

J

K

Rev. 001/2021-07

back

HOTEL VIENNA | AUSTRIA

PRIVATE RESIDENCE GERMANY

CLEA

CEILING SURFACE

p. 569



1.0

LED 14.4W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium wet painted | white
opal glass hand blown

0.62kg IP20

	CODE
	181188W_
	181188SG_
	181188FJ_
	181188B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	745	>90	3
3000K	775	>90	5



2.0

LED 14.4W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium wet painted | white
opal glass hand blown

1.00kg IP20

	CODE
	181288W_
	181288SG_
	181288FJ_
	181288B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	745	>90	3
3000K	775	>90	5



3.0

LED 14.4W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium wet painted | white
opal glass hand blown

2.20kg IP20

	CODE
	181388W_
	181388SG_
	181388FJ_
	181388B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	745	>90	3
3000K	775	>90	5

available from summer 2021

Rev. 001/2021-06

back

PRIVATE RESIDENCE AUSTRIA

CLOCK

CEILING SURFACE

p. 571

1.0

LED 14.4W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium and steel wet painted
white opal glass hand blown

0.66kg IP20

	CODE
	182188B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	745	>90	3
3000K	775	>90	5

2.0

LED 14.4W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium and steel wet painted
white opal glass hand blown

0.76kg IP20

	CODE
	182388B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	745	>90	3
3000K	775	>90	5

3.0

LED 14.4W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium and steel wet painted
white opal glass hand blown

1.00kg IP20

	CODE
	182488B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	745	>90	3
3000K	775	>90	5

available from summer 2021

Rev. 001/2021-06

back

OFFICE | RPD | VIVA ARCHITECTURE ANTWERPEN | BELGIUM

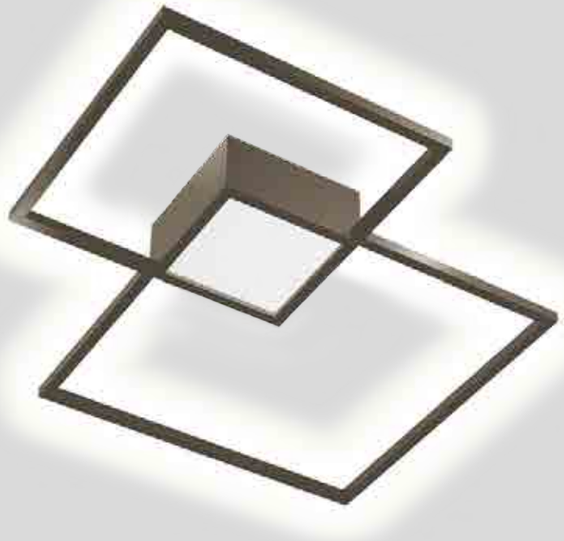

VENN

CEILING SURFACE

p. 471 p. 579

DESIGNED BY
S&R CORNELISSEN





1.0

LED 38W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS
aluminium powder coated
opal PMMA cover indirect light

2.50kg IP20

phase-cut dim

	CODE
	149184W_
	149184Q_
	149184B_

DALI dim

	CODE
	149185W_
	149185Q_
	149185B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2950	>80	2
3000K	3140	>80	4

2.0

LED 47W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS
aluminium powder coated
opal PMMA cover dir./indir. light

2.50kg IP20

phase-cut dim

	CODE
	149284W_
	149284Q_
	149284B_

DALI dim

	CODE
	149285W_
	149285Q_
	149285B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	540/2950	>80	2
3000K	580/3140	>80	4

back

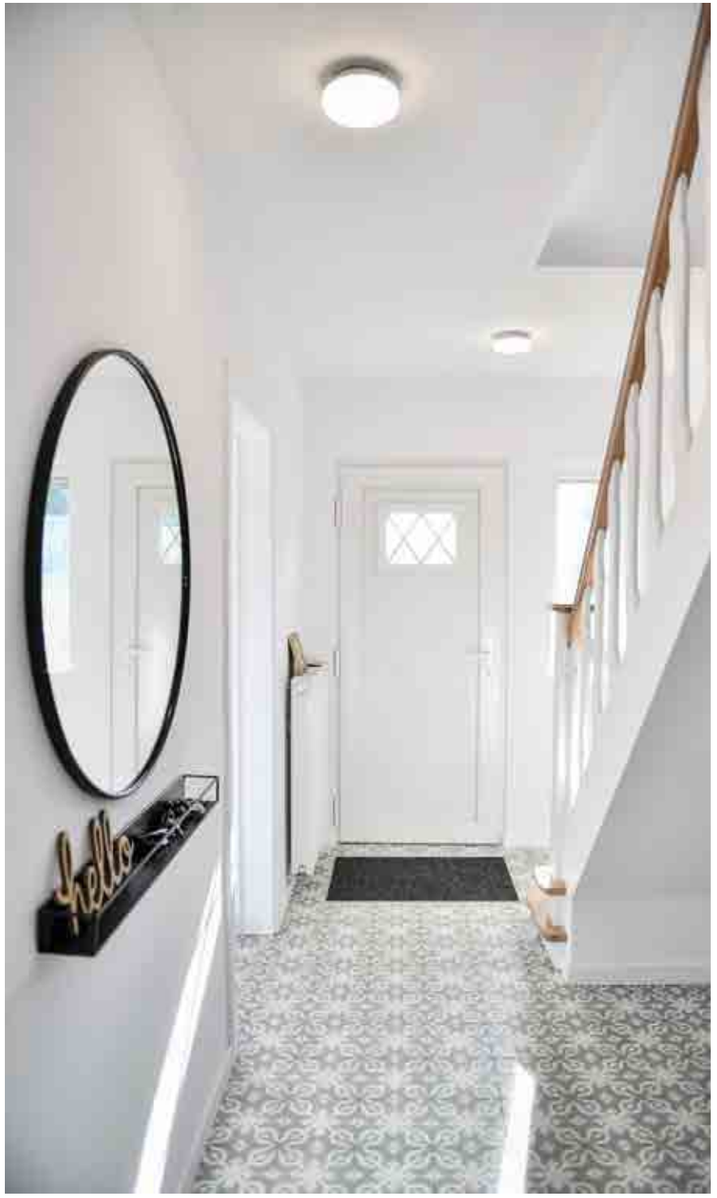

PRIVATE RESIDENCE BELGIUM

ROB IP44

CEILING SURFACE

p. 615

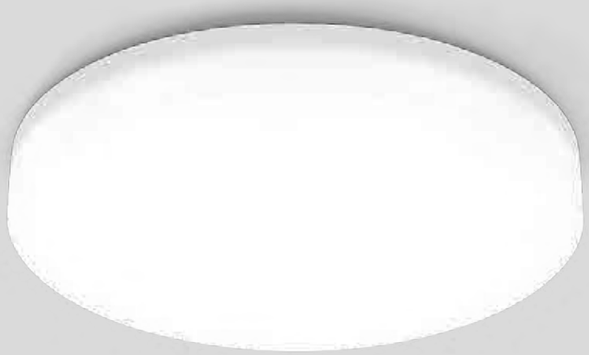



1.6

LED 13W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
opal PMMA cover

0.70kg IP44

	CODE
	701184W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	860	>90	3
3000K	950	>90	5

2.6

LED 18W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
opal PMMA cover

1.20kg IP44

	CODE
	701284W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1250	>90	3
3000K	1380	>90	5

3.5

LED 32W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
opal PMMA cover

1.90kg IP44

	CODE
	701384W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1820	>90	3
3000K	1950	>90	5



OPTIONAL

dimmer

	CODE
phase-cut + bluetooth	90019100

more dimmers and specs on page 728

OPTIONAL

dimmer

	CODE
phase-cut + bluetooth	90019100

more dimmers and specs on page 728

OPTIONAL

dimmer

	CODE
phase-cut + bluetooth	90019100

more dimmers and specs on page 728

back

ORL PRAXIS SEMADENI | EMULSION INNENARCHITEKTUR CHUR | SWITZERLAND

ROBY IP44

CEILING SURFACE

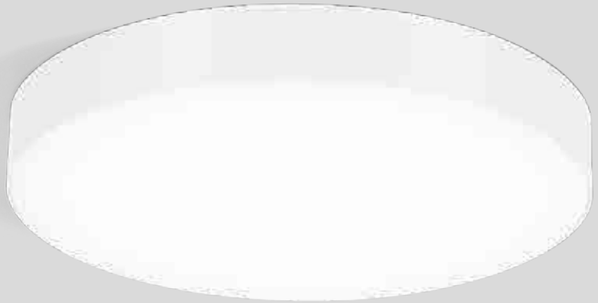

1.6

LED 13W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
brushed | opal PMMA cover

1.00kg IP44

	CODE
	135184W_
	135184B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	750	>90	3
3000K	820	>90	5

OPTIONAL

dimmer

	CODE
phase-cut + bluetooth	90019100

more dimmers and specs on page 728

2.6

LED 18W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
brushed | opal PMMA cover

1.55kg IP44

	CODE
	135284W_
	135284B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1130	>90	3
3000K	1250	>90	5

OPTIONAL

dimmer

	CODE
phase-cut + bluetooth	90019100

more dimmers and specs on page 728

3.5

LED 32W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
brushed | opal PMMA cover

2.45kg IP44

	CODE
	135384W_
	135384B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1680	>90	3
3000K	1800	>90	5

OPTIONAL

dimmer

	CODE
phase-cut + bluetooth	90019100

more dimmers and specs on page 728

back

PRIVATE RESIDENCE | LEIBEZ INTERIEUR AUSTRIA

TOWNA IP44

CEILING SURFACE

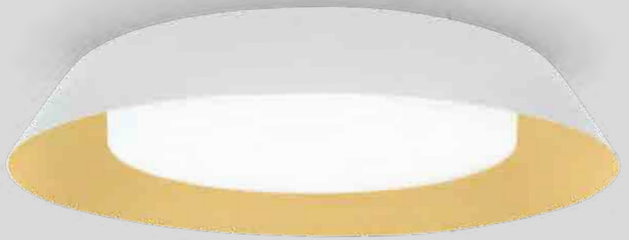







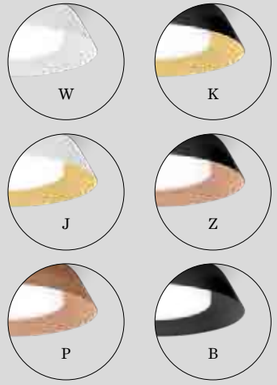

1.0

LED 13W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim | steel
wet painted | opal PMMA cover

1.15kg | IP44

	CODE
	178184W_
	178184J_
	178184P_
	178184K_
	178184Z_
	178184B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	780	>90	3
3000K	850	>90	5

OPTIONAL

dimmer

	CODE
phase-cut + bluetooth	90019100

more dimmers and specs on page 728

2.0

LED 18W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim | steel
wet painted | opal PMMA cover

1.90kg | IP44

	CODE
	178284W_
	178284J_
	178284P_
	178284K_
	178284Z_
	178284B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1090	>90	3
3000K	1210	>90	5

OPTIONAL

dimmer

	CODE
phase-cut + bluetooth	90019100

more dimmers and specs on page 728

3.0

LED 32W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim | steel
wet painted | opal PMMA cover

3.00kg | IP44

	CODE
	178384W_
	178384J_
	178384P_
	178384K_
	178384Z_
	178384B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1550	>90	3
3000K	1660	>90	5

OPTIONAL

dimmer

	CODE
phase-cut + bluetooth	90019100

more dimmers and specs on page 728

back

PRIVATE RESIDENCE AUSTRIA

TAIO ROUND IP65

CEILING SURFACE

p. 243 p. 597 p. 601 p. 635

1.0

LED 10.5W | 100-240VAC
50-60Hz | COB 3-step | incl. PS
phase-cut dim | aluminium
powder coated | opal glass lens

0.55kg IP65

	CODE
	180281W_
	180281A_
	180281Q_
	180281B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	425 | >90	3
3000K	455 | >90	5

back

PRIVATE RESIDENCE | IMORE INTERIEURARCHITECTUUR BELGIUM

MIRBI IP44

CEILING SURFACE

p. 255 p. 587







1.0

LED 7W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
wet painted PA housing
clear + opal PMMA cover

0.4kg IP44

	CODE
	175188W_
	175188E_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	510	>90	5

2.0

LED 7W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
wet painted PA housing
clear + opal PMMA cover

0.5kg IP44

	CODE
	175288W_
	175288E_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	510	>90	5

back

TRACKS | SYSTEMS

p. 339 — 413

STREX SYSTEM

TRACKS ACCESSORIES
p. 343

CENO
p. 349

MICK
p. 353

RAY MINI
p. 357

BOX MINI
p. 359

RAY
p. 387

HEXO
p. 387

DOCUS MINI
p. 361

HEXO MINI
p. 363

OPAL LIGHT MODULE
p. 365

DOTS LIGHT MODULE
p. 365

ODREY
p. 367

3-PHASE TRACK

TRACKS ACCESSORIES
p. 389

SQUBE
p. 391

CENO FORT
p. 397

RAY
p. 399

HEXO
p. 399



STUBE
p. 371



SOLLI
p. 373

ELLO SYSTEM

ELLO SYSTEM
p. 401

PIRRO SYSTEM

PIRRO SYSTEM
p. 409

1-PHASE TRACK

TRACKS ACCESSORIES
p. 377

SARA
p. 379

SQUBE
p. 381

DRO
p. 383

ODREY
p. 385

ILANE

ILANE
p. 411

ON THE RIGHT TRACK

THREE WAYS TO MAKE THEM SHINE

It's normal to go off the rails when it comes to tracks. That's why we need a quick introduction. You can essentially choose between three options. The simplest is the 1-phase track. This system controls light sources from one point and switches them all on and off together. You'd prefer to operate each luminaire individually? Then we recommend the 3-phase track, where spotlights, insets and suspended luminaires are connected and controlled separately. The 48-volt system is new in the range. It allows spotlights and suspended luminaires, and also various sets of spots and opal insets for general lighting, to be inserted with ease. This means you can always react flexibly to changes in the room. The system can be easily controlled by your smartphone, which is especially practical.

Dass man bei Schienen erst mal Bahnhof versteht, ist ganz normal. Deshalb gibt's hier eine schnelle Einführung. Grundsätzlich können Sie zwischen drei Möglichkeiten wählen. Die einfachste ist die 1-Phasen-Schiene, bei der alle Lichtquellen von einem Punkt aus angesteuert und zusammen ein- und ausgeschaltet werden. Sie möchten Ihre Leuchten einzeln bedienen? Dann empfiehlt sich eine 3-Phasen-Schiene, bei der Strahler, Insets und Hängeleuchten separat angeschlossen und gesteuert werden. Neu im Programm: Das 48-Volt-System. Mit ihm lassen sich nicht nur Strahler oder Hängeleuchten, sondern auch verschiedene Spots- und Opalinsets – zur Allgemeinbeleuchtung ganz einfach einsetzen. So kann jederzeit flexibel auf Veränderungen im Raum reagiert werden. Besonders praktisch: Das System lässt sich ganz bequem vom Smartphone aus steuern.

HAVE A LOOK
weverducre.com/strex-configurator

	STREX TRACK SYSTEM 48V DALI | p. 342	1-PHASE TRACK 220–240V | p. 376	3-PHASE TRACK 220–240V | p. 388
1 CHOOSE YOUR MOUNTING	 recessed · surface · suspended · suspended indirect light	recessed · surface · suspended	 surface · suspended
2 COMBINE IT WITH DIFFERENT INSETS			
3 INSTALL IT IN YOUR FAVOURITE LAYOUT			

For more support and an extended layout of track systems, please check our FAQ section at weverducre.com/faq

back

RECESSED EXAMPLES

configure your own STREX SYSTEM online at
weverducre.com/strex-configurator

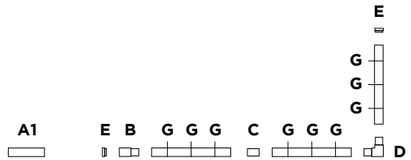



A1 | POWER SUPPLY

remote converter | 220-240VAC
50-60Hz | 48V | for connection to
power feed

	CODE
100W | 48V	90218901
150W | 48V	90218902

for DALI SELV solution see page 737



B | POWER FEED

48V | 15A | DALI | end/middle power
feed | max. 4 x 1.5mm²

	CODE
	90014153
	90014154



C | CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector

	CODE
	90014196
	90014197



D | L-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector left and right

	CODE
	90014251
	90014252

for 4 corner O shape, refer to mounting
instructions or online configurator



E | END CAP

	CODE
	90014149
	90014150



F | WIRELESS CONTROL

5W | 2400-2483.5mHz | adapter for
DALI wireless management

	CODE
	90014194
	90014195

Download the app for setup and
control to start dimming.



RECESSED

track 48V | 15A | DALI

SELV

		CODE
	1.0m	90014187
	1.0m	90014188
	2.0m	90014189
	2.0m	90014190
	3.0m	90014191
	3.0m	90014192



G | MOUNTING BRACKET

recessed mounting bracket

31-33 80 5-25

CODE
90014193

for 1.0m - 2pcs needed
for 2.0m - 4pcs needed
for 3.0m - 6pcs needed

custom cut
available

more on page 737 and
weverducre.com/strex-custom

back

SURFACE EXAMPLES

configure your own STREX SYSTEM online at
weverducre.com/strex-configurator

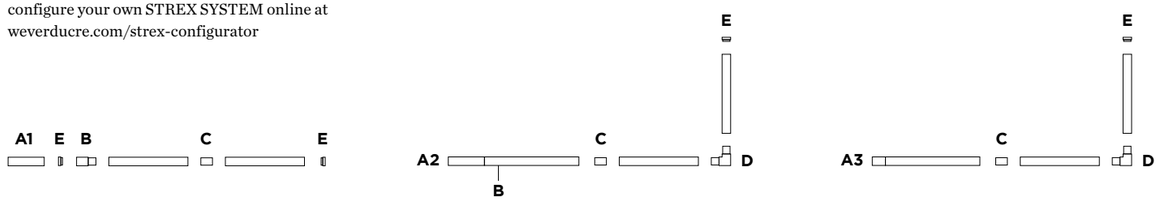



SURFACE

track 48V | 15A | DALI

SELV

		CODE
	1.0m	90014181
■	1.0m	90014182
	2.0m	90014183
■	2.0m	90014184
	3.0m	90014185
■	3.0m	90014186

custom cut available

more on page 737 and
weverducre.com/strex-custom



A1 | POWER SUPPLY

remote converter | 220-240VAC
50-60Hz | 48V | for connection to
power feed

	CODE
100W | 48V	90218901
150W | 48V	90218902

for DALI SELV solution see page 737



A2 | POWER SUPPLY

profile converter box incl. PS
220-240VAC | 50-60Hz
48V | incl. DALI through wiring
for connection to power feed

220-240V
DALI SELV IN
48V
DALI SELV OUT

		CODE
	100W	90014166
■	100W	90014167
	150W	90014170
■	150W	90014171



A3 | IN TRACK POWER SUPPLY

converter with in line connection box
including power feed | 220-240VAC
50-60Hz | 48V

		CODE
■	80W	90014176



		CODE
■	230W	90014177



B | POWER FEED

48V | 15A | DALI | end/middle power
feed | max. 4 x 1.5mm²

	CODE
	90014153
■	90014154



F | WIRELESS CONTROL

5W | 2400-2483.5mHz | adapter for
DALI wireless management

	CODE
	90014194
■	90014195

Download the app for setup and
control to start dimming.



C | CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector

	CODE
	90014196
■	90014197



D | L-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector left and right

	CODE
	90014198
■	90014199

for 4 corner O shape, refer to mounting
instructions or online configurator

E | END CAP

	CODE
	90014147
■	90014148

back

SUSPENDED EXAMPLES

configure your own STREX SYSTEM online at
weverducre.com/strex-configurator









SUSPENDED

track 48V | 15A | DALI

SELV

		CODE
	1.0m	90014181
■	1.0m	90014182
	2.0m	90014183
■	2.0m	90014184
	3.0m	90014185
■	3.0m	90014186



SUSP. INDIRECT LIGHT

track 48V | 15A | DALI | with indirect light | 3.0m suspension sets already included

SELV

		CODE
	2.0m	900140W_
■	2.0m	900140B_

LIGHT COLOUR	LUMEN | CRI	CODE
3000K | 30W	1900 | >90	5

		CODE
	3.0m	900141W_
■	3.0m	900141B_

LIGHT COLOUR	LUMEN | CRI	CODE
3000K | 45W	2850 | >90	5



G | SUSPENSION SET

complete suspension set
incl. ceiling fixation bracket | not needed for indirect light version

stainless steel colour	CODE
1.5m	90014160
3.0m	90014161

black colour	CODE
1.5m	90014274
3.0m	90014275

for 1.0m - 2pcs needed
for 2.0m - 3pcs needed
for 3.0m - 4pcs needed

custom cut available

more on page 737 and
weverducre.com/strex-custom



A1 | POWER SUPPLY

profile converter box incl. PS 220-240VAC | 50-60Hz | 48V | incl. DALI through wiring for connection to power feed | power supply in box, suspended in line with profile

		CODE
	100W	90014260
■	100W	90014261
	150W	90014262
■	150W	90014263



C | CONNECTOR

48V | 15A | DALI | electrical/ mechanical connector

	CODE
	90014196
■	90014197



A2 | POWER SUPPLY

ceiling base incl. PS 220-240VAC | 50-60Hz | 48V incl. DALI through wiring for connection to power feed



		CODE
	100W	90014168
■	100W	90014169
	150W	90014172
■	150W	90014173



D | L-CONNECTOR

48V | 15A | DALI | electrical/ mechanical connector left and right

	CODE
	90014198
■	90014199

for 4 corner O shape, refer to mounting instructions or online configurator



A3 | IN TRACK POWER SUPPLY

converter in track | including power feed | 220-240VAC | 50-60Hz | 48V incl. 3m power cable

		CODE
■	80W	90014174



		CODE
■	230W	90014175



E | END CAP

	CODE
	90014147
■	90014148



B | POWER FEED

48V | 15A | DALI | end/middle power feed | max. 4 x 1.5mm²

	CODE
	90014153
■	90014154



F | WIRELESS CONTROL

5W | 2400-2483.5mHz | adapter for DALI wireless management

	CODE
	90014194
■	90014195

Download the app for setup and control to start dimming.

PRIVATE RESIDENCE BELGIUM

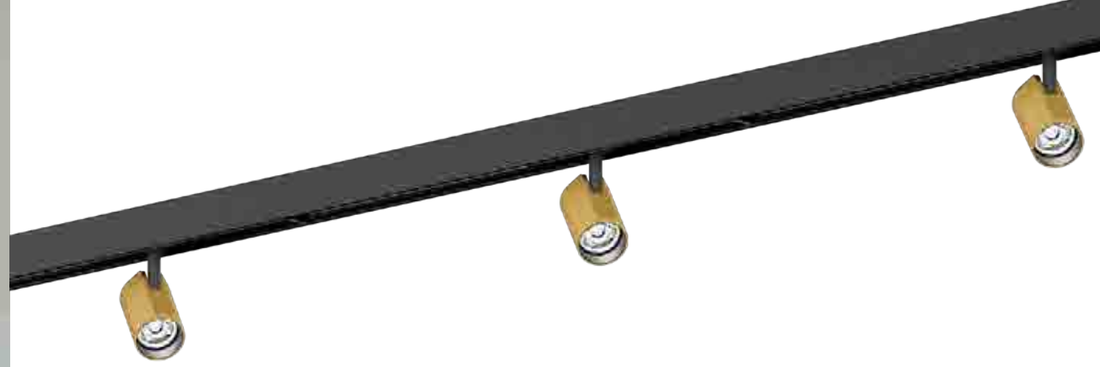

CENO on track

48V SYSTEM

p. 219 p. 317









1.0

LED LED 6.5W | 48V | COB 3-step
aluminium powder coated
PC adapter

0.13kg IP20 0,3 P 35°

90° 360°

non dim

	CODE
	166562W_
	166562K_
	166562B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	440	>90	3
3000K	470	>90	5

accessories on page 744

1.0

LED LED 6.5W | 48V | COB 3-step
aluminium powder coated
PC adapter

0.20kg IP20 0,3 P 35°

90° 360°

DALI dim

	CODE
	166565W_
	166565K_
	166565B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	440	>90	3
3000K	470	>90	5

accessories on page 744

2.0

LED 2x LED 6.5W | 48V | COB 3-step
aluminium powder coated
PC adapter

0.21kg IP20 0,3 P 35°

90° 360°

non dim

	CODE
	166662W_
	166662K_
	166662B_

DALI dim

	CODE
	166665W_
	166665K_
	166665B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x440	>90	3
3000K	2x470	>90	5

accessories on page 744

Rev. 001/2021-06

back

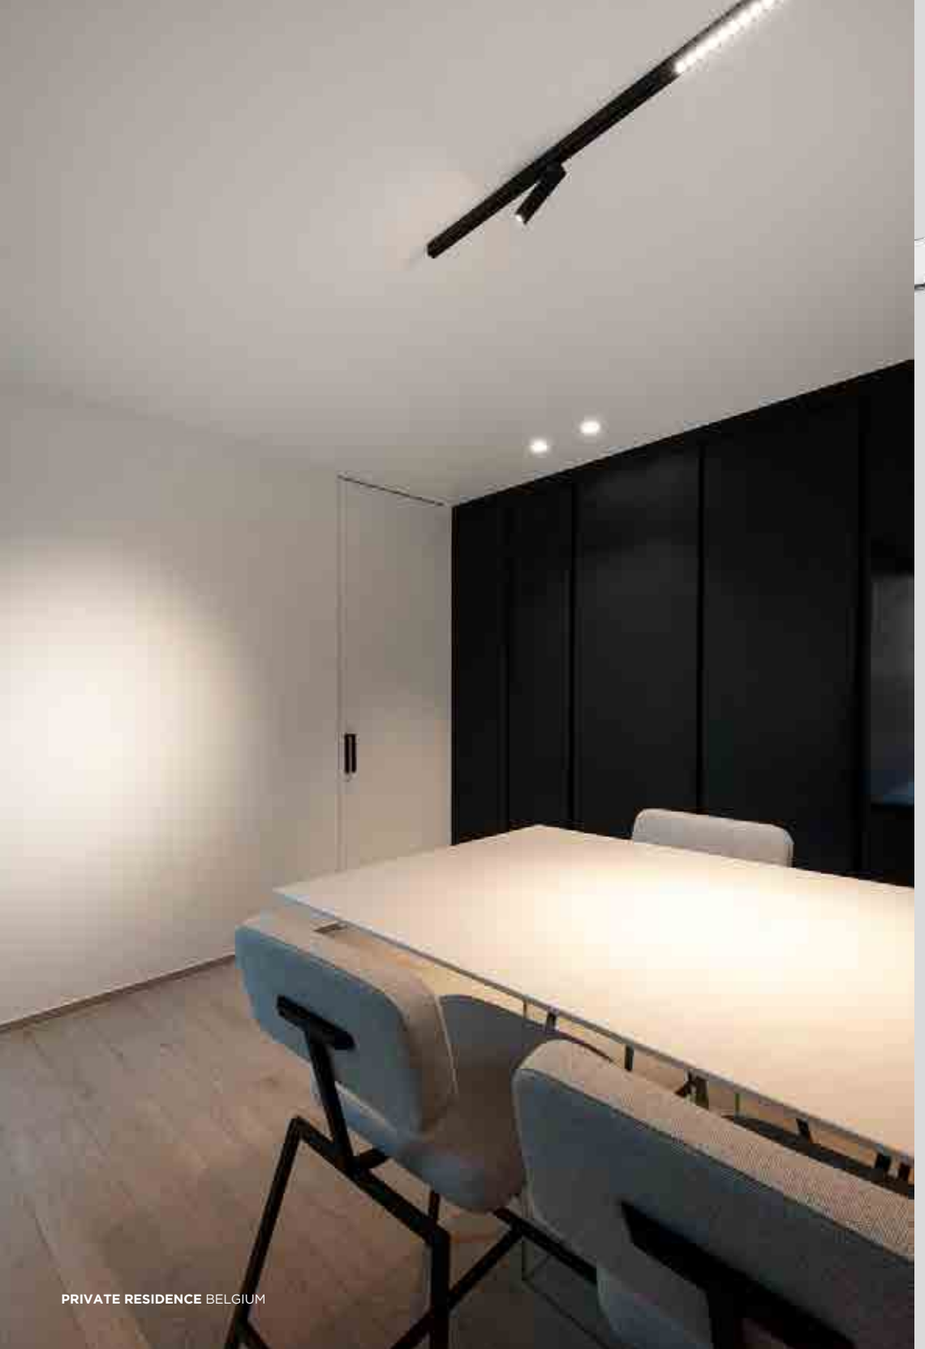

PRIVATE RESIDENCE BELGIUM

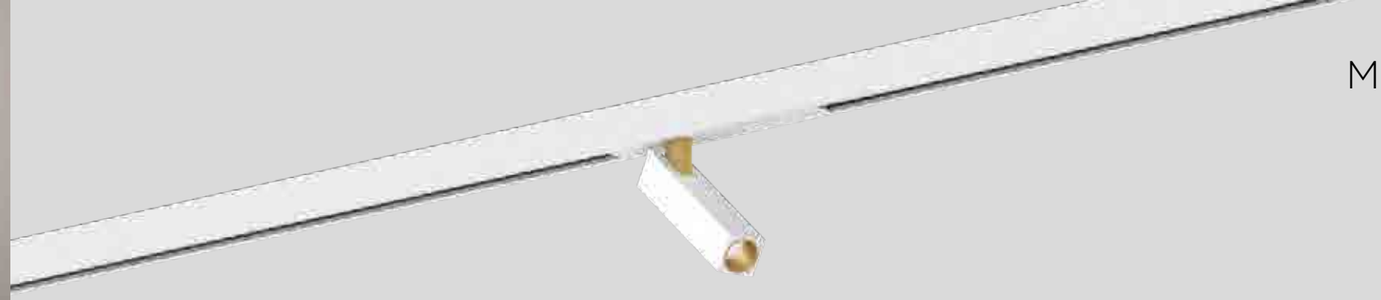

MICK on track

48V SYSTEM

p. 319 p. 555

DESIGNED BY
S&R CORNELISSEN

reddot winner 2020
lighting design



1.0

LED 9.5W | 48V | COB 3-step
aluminium powder coated
PC adapter

0.22kg IP20 0,3-D P 18°

90° 360°

non dim

	CODE
	159462J_
	159462K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	325	>90	3
3000K	355	>90	5



1.0

LED 9.5W | 48V | COB 3-step
aluminium powder coated
PC adapter

0.22kg IP20 0,3-D P 18°

90° 360°

DALI dim

	CODE
	159465J_
	159465K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	325	>90	3
3000K	355	>90	5



2.0

2x LED 9.5W | 48V | COB 3-step
aluminium powder coated
PC adapter

0.44kg IP20 0,3-D P 18°

90° 360°

non dim

	CODE
	159562J_
	159562K_

DALI dim

	CODE
	159565J_
	159565K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x325	>90	3
3000K	2x355	>90	5

back

RAY mini on track

48V SYSTEM

p. 261 p. 525

only for ceiling and suspended tracks



1.0

LED 7W | 48V | COB 3-step
aluminium powder coated brushed

0.16kg IP20

non dim | adapter colour

CODE
258262W__
258262B__

housing | inner reflector colour

CODE
W
J
E
G
GB
Q
BQ
K
B

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	490 | >90	3
3000K	520 | >90	5



1.0

LED 7W | 48V | COB 3-step
aluminium powder coated brushed

0.16kg IP20

DALI dim | adapter colour

CODE
258265W__
258265B__

housing | inner reflector colour

CODE
W
J
E
G
GB
Q
BQ
K
B

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	490 | >90	3
3000K	520 | >90	5

Rev. 001/2021-06

back

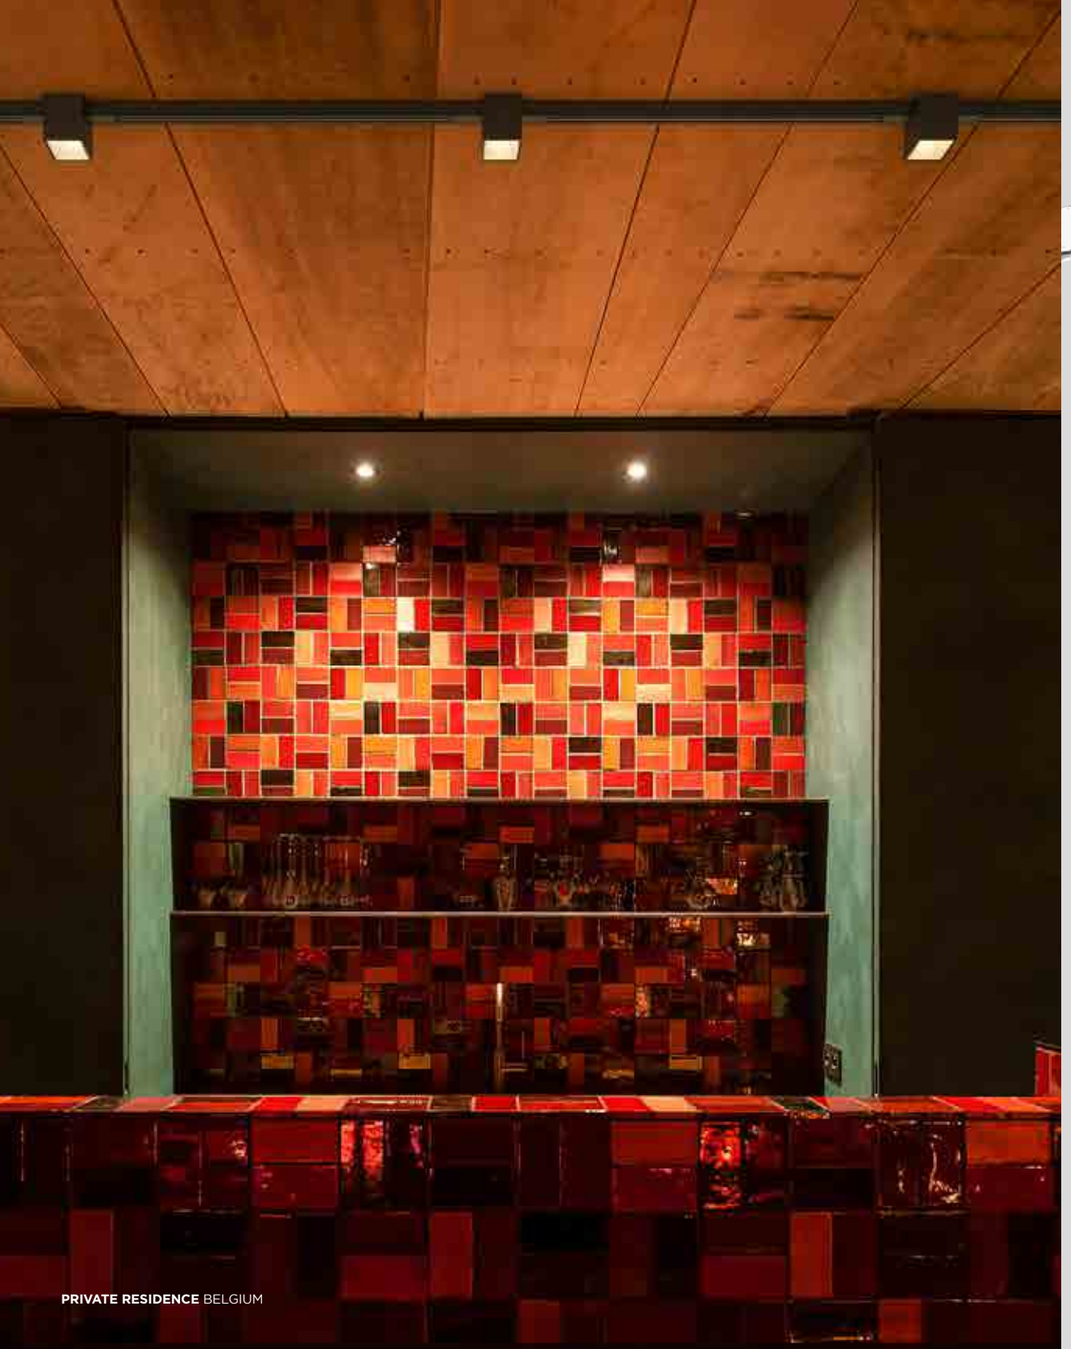

PRIVATE RESIDENCE BELGIUM

BOX mini on track

48V SYSTEM

p. 269 p. 533





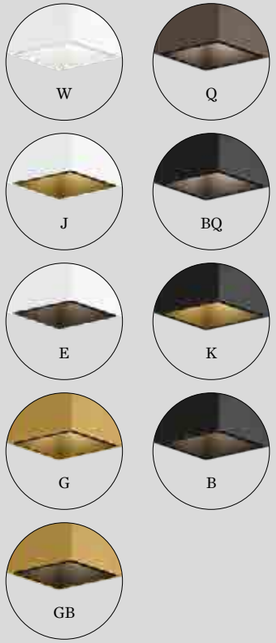

only for ceiling and suspended tracks

1.0

LED 7W | 48V | COB 3-step
aluminium powder coated brushed
PC adapter

0.20kg IP20

non dim | adapter colour

	CODE
	258162W__
	258162B__

housing | inner reflector colour

	CODE
	W
	J
	E
	G
	GB
	Q
	BQ
	K
	B

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	490 | >90	3
3000K	520 | >90	5

1.0

LED 7W | 48V | COB 3-step
aluminium powder coated brushed
PC adapter

0.20kg IP20

DALI dim | adapter colour

	CODE
	258165W__
	258165B__

housing | inner reflector colour

	CODE
	W
	J
	E
	G
	GB
	Q
	BQ
	K
	B

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	490 | >90	3
3000K	520 | >90	5

Rev. 001/2021-06

back

PRIVATE RESIDENCE SPAIN

DOCUS mini on track

48V SYSTEM

p. 277 p. 541





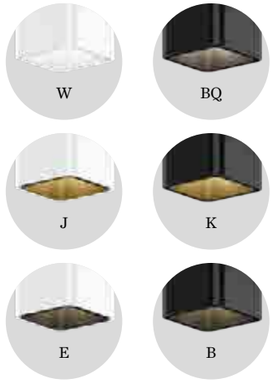

only for ceiling and suspended tracks

1.0

LED 7W | 48V | COB 3-step
aluminium powder coated
PC adapter

0.18kg IP20

non dim | adapter colour

	CODE
	258362W_ _
	258362B_ _

housing | inner reflector colour

	CODE
	W
	J
	E
	BQ
	K
	B

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	490 | >90	3
3000K	520 | >90	5

1.0

LED 7W | 48V | COB 3-step
aluminium powder coated
PC adapter

0.18kg IP20

DALI dim | adapter colour

	CODE
	258365W_ _
	258365B_ _

housing | inner reflector colour

	CODE
	W
	J
	E
	BQ
	K
	B

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	490 | >90	3
3000K	520 | >90	5

Rev. 001/2021-06

back

HOTEL GERMANY

HEXO mini on track

48V SYSTEM

p. 283 p. 543





W

BQ

J

K

E

B

Q

only for ceiling and suspended tracks

1.0

LED 7W | 48V | COB 3-step
aluminium powder coated brushed
PC adapter

0.18kg IP20 0,3

non dim | adapter colour

	CODE
	258462W_ _
	258462B_ _

housing | inner reflector colour

	CODE
	W
	J
	E
	Q
	BQ
	K
	B

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	490 | >90	3
3000K	520 | >90	5

1.0

LED 7W | 48V | COB 3-step
aluminium powder coated brushed
PC adapter

0.18kg IP20 0,3

DALI dim | adapter colour

	CODE
	258465W_ _
	258465B_ _

housing | inner reflector colour

	CODE
	W
	J
	E
	Q
	BQ
	K
	B

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	490 | >90	3
3000K	520 | >90	5

Rev. 001/2021-06

back

OFFICE GERMANY

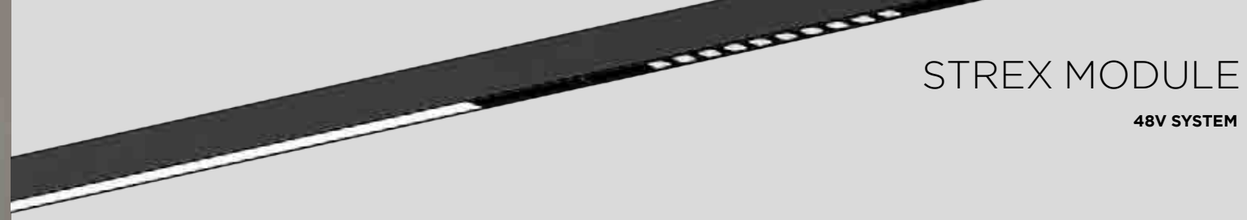

STREX MODULE

48V SYSTEM





1.0 DOT

LED LED 8.5W | 48V | PCB 3-step
aluminium powder coated
PC cover

0.11kg IP20 S+0,3+ P 24° UGR≤19

non dim

	CODE
	171142W_
	171142B_

DALI dim

	CODE
	171145W_
	171145B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	900 | >90	3
3000K	1000 | >90	5

1.0 OPAL

LED LED 8W | 48V | PCB 3-step
aluminium powder coated
PC cover

0.16kg IP20 S+0,3+ P

non dim

	CODE
	171182W_
	171182B_

DALI dim

	CODE
	171185W_
	171185B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	441 | >90	3
3000K	490 | >90	5

2.0 OPAL

LED LED 16W | 48V | PCB 3-step
aluminium powder coated
PC cover

0.32kg IP20 S+0,3+ P

non dim

	CODE
	171282W_
	171282B_

DALI dim

	CODE
	171285W_
	171285B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	878 | >90	3
3000K	975 | >90	5

back

ODREY on track

48V SYSTEM

p. 419
p. 485
p. 519

OPTIONAL

inner cover 1.0

	CODE
	911420G0
	911420B0

suitable for shades 6.0 | 7.0 | 8.0

1.0

LED 7W | 48V | COB 3-step
aluminium wet painted
PC adapter | contact customer service for alternative cable lengths

0.25kg IP20 0,3-D P 32°

DALI dim

	CODE
	257165G_
	257165B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	335	>90	3
3000K	350	>90	5

ALWAYS USE

shade 1.0 - 8.0 in gold

	CODE
1.0	911421G1
2.0	91140GG0
2.0	91140GB0
3.0	911423G1
4.0	911424G1
5.0	911425G1
6.0	911426G1
7.0	911427G1
8.0	911428G1

shade 1.0 - 8.0 in black

	CODE
1.0	911421B1
2.0	91140BB0
2.0	91140BG0
3.0	911423B1
4.0	911424B1
5.0	911425B1
6.0	911426B1
7.0	911427B1
8.0	911428B1

back

PRIVATE RESIDENCE NETHERLANDS

OFFICE GERMANY

STUBE on track

48V SYSTEM



W

G

B

Rev. 001/2021-07

1.0

LED 7.2W | 48V | COB 3-step
aluminium wet painted
PC adapter | contact customer service for alternative cable lengths

0.15kg IP20 0,3 25°

DALI dim

	CODE
	170365W_
	170365G_
	170365B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	535	>90	3
3000K	550	>90	5



2.0

LED 7.2W | 48V | COB 3-step
aluminium wet painted
PC adapter| contact customer service for alternative cable lengths

0.25kg IP20 0,3 25°

DALI dim

	CODE
	170465W_
	170465G_
	170465B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	535	>90	3
3000K	550	>90	5

back

PRIVATE RESIDENCE AUSTRIA

SOLLI on track

48V SYSTEM



1.0

LED 5W | 48V | COB 3-step aluminium powder coated glass handblown | black PC adapter and cable | contact customer service for alternative cable lengths

0.70kg IP20

DALI dim

	CODE
	238185FD_
	238185TD_
	238185WB_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	215 | >90	3
3000K	230 | >90	5

back

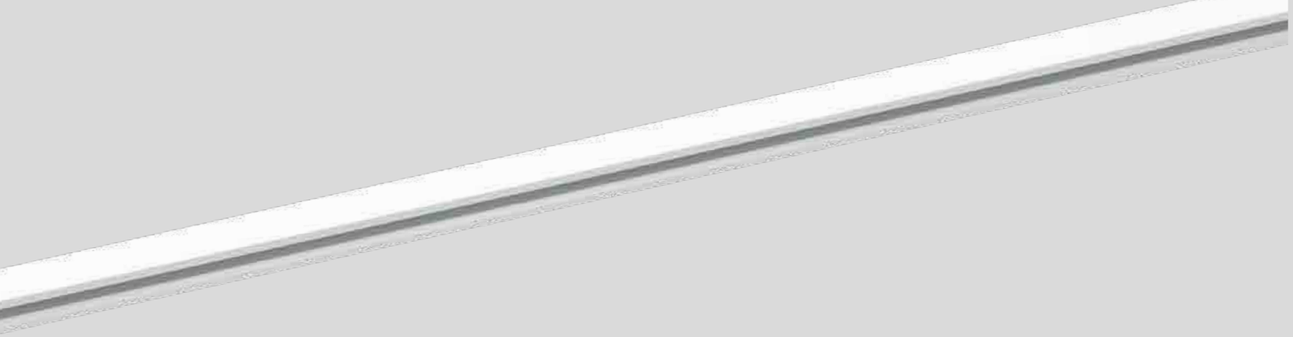



TRACK PROFILE

recessed | 220-240V | 16A

		CODE
	1.0m	90014118
	1.0m	90014119
	2.0m	90014120
	2.0m	90014121
	3.0m	90014122
	3.0m	90014123



F | MOUNTING BRACKET

for recessed fixation

34-45 85 4-15

	CODE
	90014100

for 1.0m - 2pcs needed
for 2.0m - 3pcs needed
for 3.0m - 4pcs needed



TRACK PROFILE

surface | suspended | 220-240V | 16A

		CODE
	1.0m	90014001
	1.0m	90014007
	2.0m	90014002
	2.0m	90014008
	3.0m	90014003
	3.0m	90014009

G | SUSPENSION SET

complete suspension set
incl. ceiling fixation bracket

		CODE
	1.5m	90014101
	1.5m	90014102
	3.0m	90014103
	3.0m	90014104

for 1.0m - 2pcs needed
for 2.0m - 3pcs needed
for 3.0m - 4pcs needed

1-PHASE TRACKS

220-240V TRACKS | ACCESSORIES

RECESSED | SURFACE | SUSPENDED EXAMPLES

configuration as seen from top view
for more support and extended layout of 1-phase tracks,
please check our FAQ section on weverducre.com/faq

top view



A | END FEED

220-240V | max. 3 x 1.5mm² - 16A

	CODE
	90014018
	90014019

top view



A | END FEED

220-240V | max. 3 x 1.5mm² - 16A

	CODE
	90014020
	90014021

top view



B | MIDDLE FEED

straight
220-240V | max. 3 x 1.5mm² - 16A

	CODE
	90014036
	90014037

C | END CAP LEFT/RIGHT

	CODE
	90014028
	90014029

top view



D | L-FEED

can be used as feed and connector
220-240V | max. 3 x 1.5mm² - 16A

	CODE
	90014024
	90014025

top view



D | L-FEED

can be used as feed and connector
220-240V | max. 3 x 1.5mm² - 16A

	CODE
	90014026
	90014027

top view

E | CONNECTOR

straight | 220-240V | 16A

	CODE
	90014022
	90014023

COVERPLATE END FEED

only use with recessed tracks

	CODE
	90014124
	90014125

more 1-phase track accessories on page 738

back

ENSO BOUTIQUE HOTEL | TIM DE TAEYE & TINE VANPARIJS KNOKKE-HEIST | BELGIUM

SARA on track

1-PHASE

p. 309 p. 551

1.0 LED

LED 8W | 220-240VAC
COB 3-step | phase-cut dim
aluminium powder coated
incl. 1-phase Global® track adapter

0.24kg IP20

34° 90° 355°

	CODE
	157164W_
	157164G_
	157164K_
	157164B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	500 | >80	2
3000K	530 | >80	4

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC
aluminium powder coated
incl. 1-phase Global® track adapter

0.16kg IP20

90° 355°

	CODE
	157120W0
	157120G0
	157120K0
	157120B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

for LED version inner ring is always black

OPTIONAL

dimmer

	CODE
phase-cut + bluetooth	90019100

more dimmers and specs on page 728

back

LENDHOTEL | LAM ARCHITEKTUR ZT GMBH GRAZ | AUSTRIA

SQUBE on track

1-PHASE

p. 311





1.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
aluminium powder coated
incl. 1-phase Global® track adapter

0.36kg IP20 0,3

39° 90° 355°

	CODE
	144164W_
	144164B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	415	>80	2
3000K	430	>80	4
1800-3000K	350	>80	9

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
incl. 1-phase Global® track adapter

0.32kg IP20 0,3

90° 355°

	CODE
	144120W0
	144120B0

OPTIONAL

dimmer

	CODE
phase-cut + bluetooth	90019100

more dimmers and specs on page 728

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

for LED version inner ring is always black

back

URBAN SPACES | STUDIO KOMO STUTTGART | GERMANY

DRO on track

1-PHASE

p. 69

1.0

LED QT14 max. 5W | G9
220-240VAC | 50-60Hz
white/brown matt glass hand blown | aluminium powder coated
incl. 1-phase Global® track adapter

0.60kg IP20

brown on

brown off

Italian hand blown glass

	CODE
	1724G0WB
	1724G0YB

OPTIONAL

QT14 LED 3.5W | phase-cut dim

	CODE
3000K | 250lm	9010G804

more specs on page 730

back

ODREY on track

1-PHASE

p. 419
p. 485
p. 519

OPTIONAL

inner cover 1.0

	CODE
	911420G0
	911420B0

suitable for shades 6.0 | 7.0 | 8.0



1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted
incl. 1-phase Global® track adapter

0.22kg IP20

	CODE
	257220G0
	257220B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K	901228B3
3000K	901228B5

more lamps and specs on page 729

ALWAYS USE

shade 1.0 - 8.0 in gold

	CODE
1.0	911421G1
2.0	91140GG0
2.0	91140GB0
3.0	911423G1
4.0	911424G1
5.0	911425G1
6.0	911426G1
7.0	911427G1
8.0	911428G1

shade 1.0 - 8.0 in black

	CODE
1.0	911421B1
2.0	91140BB0
2.0	91140BG0
3.0	911423B1
4.0	911424B1
5.0	911425B1
6.0	911426B1
7.0	911427B1
8.0	911428B1

back

white luminaires come with a white cable and adapter. Other colours are standard with black cable and adapter. Alternative colour combinations on request.

SUSPENSIONS on track

1-PHASE



RAY 2.0 | 3.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed | incl. 1-phase Global®
track adapter

0.62 | 0.76kg IP20 0,3 36°

2.0

200mm	CODE
	217564W_
	217564L_
	217564G_
	217564P_
	217564B_

3.0

300mm	CODE
	217664W_
	217664L_
	217664G_
	217664P_
	217664B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	420 | >90	3
3000K	440 | >90	5
1800-2850K	360 | >95	9



RAY 2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed | incl. 1-phase Global®
track adapter

0.54 | 0.68kg IP20 0,3

2.0

200mm	CODE
	217520W0
	217520L0
	217520G0
	217520P0
	217520B0

3.0

300mm	CODE
	217620W0
	217620L0
	217620G0
	217620P0
	217620B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729



HEXO 2.0 | 3.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed | incl. 1-phase Global®
track adapter

0.66 | 0.82kg IP20 0,3 36°

2.0

200mm	CODE
	215564G_
	215564Q_
	215564P_
	215564B_

3.0

300mm	CODE
	215664G_
	215664Q_
	215664P_
	215664B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	420 | >90	3
3000K	440 | >90	5
1800-2850K	360 | >95	9



HEXO 2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed | incl. 1-phase Global®
track adapter

0.58 | 0.74kg IP20 0,3

2.0

200mm	CODE
	215520G0
	215520Q0
	215520P0
	215520B0

3.0

300mm	CODE
	215620G0
	215620Q0
	215620P0
	215620B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

back

SURFACE | SUSPENDED EXAMPLES

configuration as seen from top view

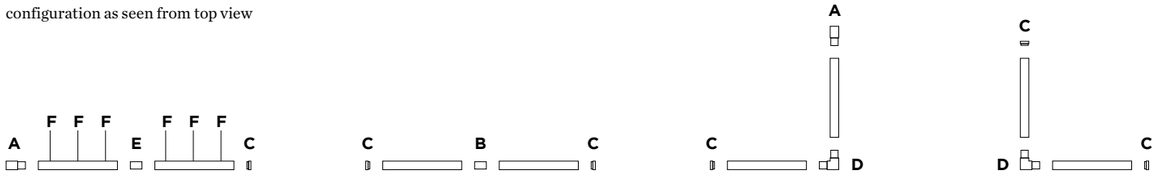



TRACK PROFILE

surface | suspended | 220-240V | 16A

FELV

		CODE
	1.0m	90014200
	1.0m	90014201
	2.0m	90014202
	2.0m	90014203
	3.0m	90014204
	3.0m	90014205

F | SUSPENSION SET

complete suspension set
incl. ceiling fixation bracket

		CODE
	1.5m	90014206
	1.5m	90014207
	3.0m	90014208
	3.0m	90014209

for 1.0m - 2pcs needed
for 2.0m - 3pcs needed
for 3.0m - 4pcs needed



A | END FEED

including cable gasket
220-240V | max. 7 x 1.5-2.5mm² | 16A

		CODE
		90014238
		90014239



A | END FEED

including cable gasket
220-240V | max. 7 x 1.5-2.5mm² | 16A

		CODE
		90014240
		90014241



B | MIDDLE FEED

straight
220-240V | max. 7 x 1.5-2.5mm² | 16A

		CODE
		90014224
		90014225

C | END CAP LEFT/RIGHT

		CODE
		90014216
		90014217



D | L-FEED

220-240V | max. 7 x 1.5-2.5mm² | 16A

		CODE
		90014220
		90014221



D | L-FEED

220-240V | max. 7 x 1.5-2.5mm² | 16A

		CODE
		90014222
		90014223



E | STRAIGHT CONNECTOR

straight | 220-240V | 16A

		CODE
		90014226
		90014227



TRACK COVER

		CODE
	1.0m	90014236
	1.0m	90014237

more 3-phase track accessories on page 739

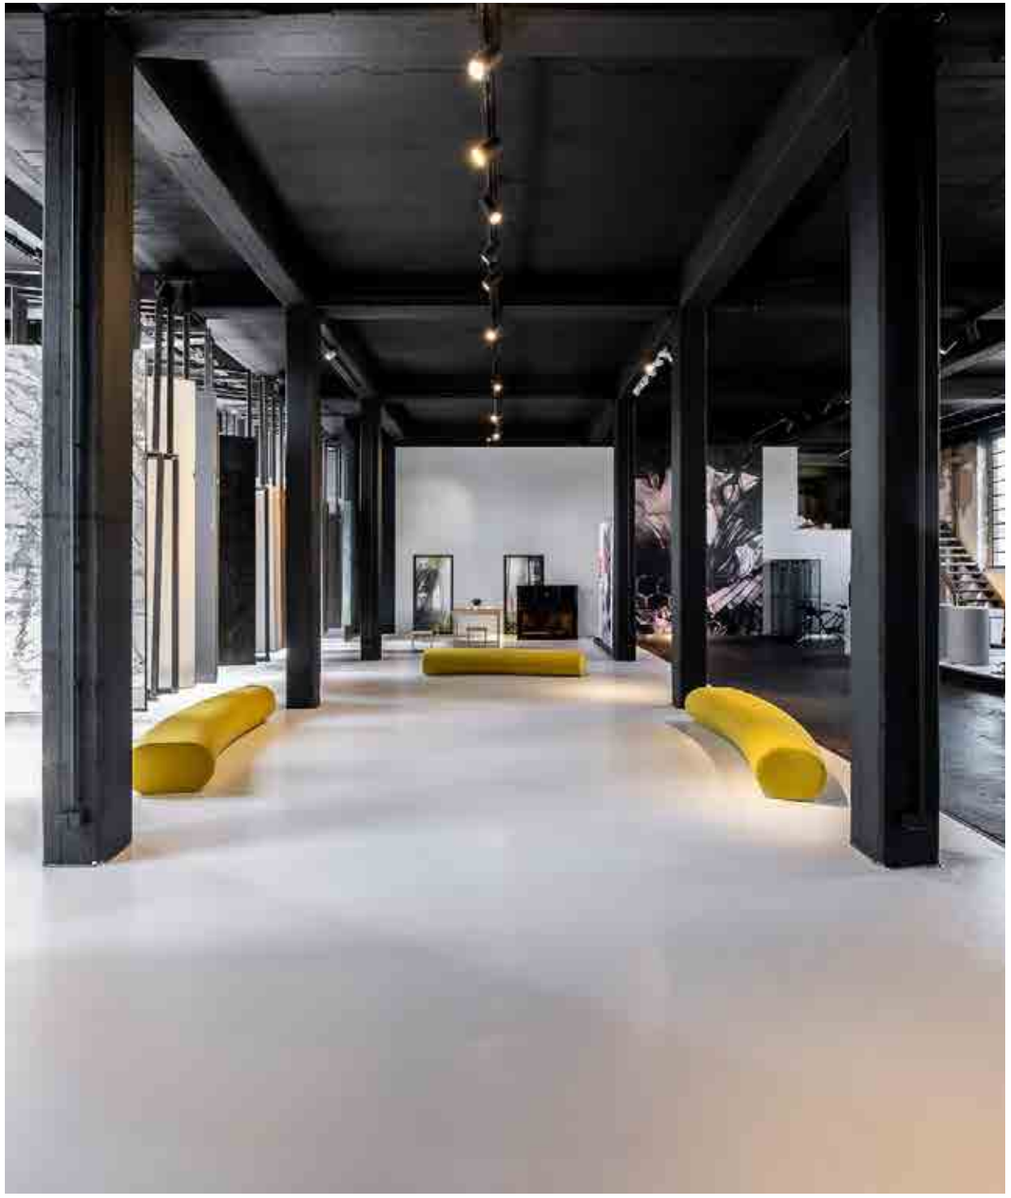

MAGAZIN AUF EF HERTEN | GERMANY

SQUBE on track

3-PHASE

p. 311

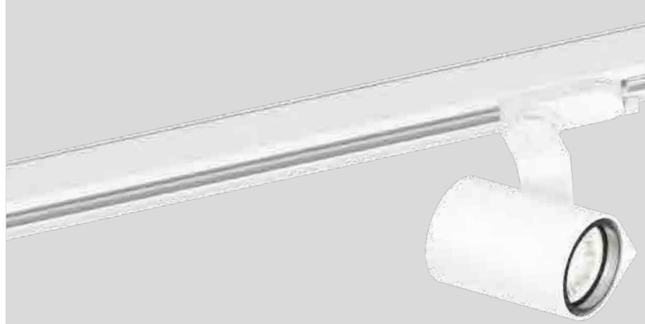







1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
incl. 3-phase track adapter

0.32kg IP20 0,3 90° 355°

	CODE
	144720W0
	144720B0

LIGHT COLOUR	LUMEN	CRI	CODE
2700K | 32°	711	>80	2
3000K | 32°	790	>80	4
1800-3000K | 58°	790	>80	9

OPTIONAL

dimmer

	CODE
phase-cut + bluetooth	90019100

more dimmers and specs on page 728

2.0 LED

LED 12W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
aluminium powder coated
incl. 3-phase track adapter

0.40kg IP20 0,3 P 90° 355°

	CODE
	144364W_
	144364B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1300	>90	3
3000K	1390	>90	5

OPTIONAL

dimmer

	CODE
phase-cut + bluetooth	90019100

more dimmers and specs on page 728

3.0 LED

LED 20W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
aluminium powder coated
incl. 3-phase track adapter

0.75kg IP20 0,3 P 27° 90° 355°

	CODE
	144564W_
	144564B_

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

for LED version inner ring is always black

Rev. 001/2021-06

back

BAR BERNARD | MARIE LECLUYSE INTERIEURARCHITECTUUR WATOU | BELGIUM

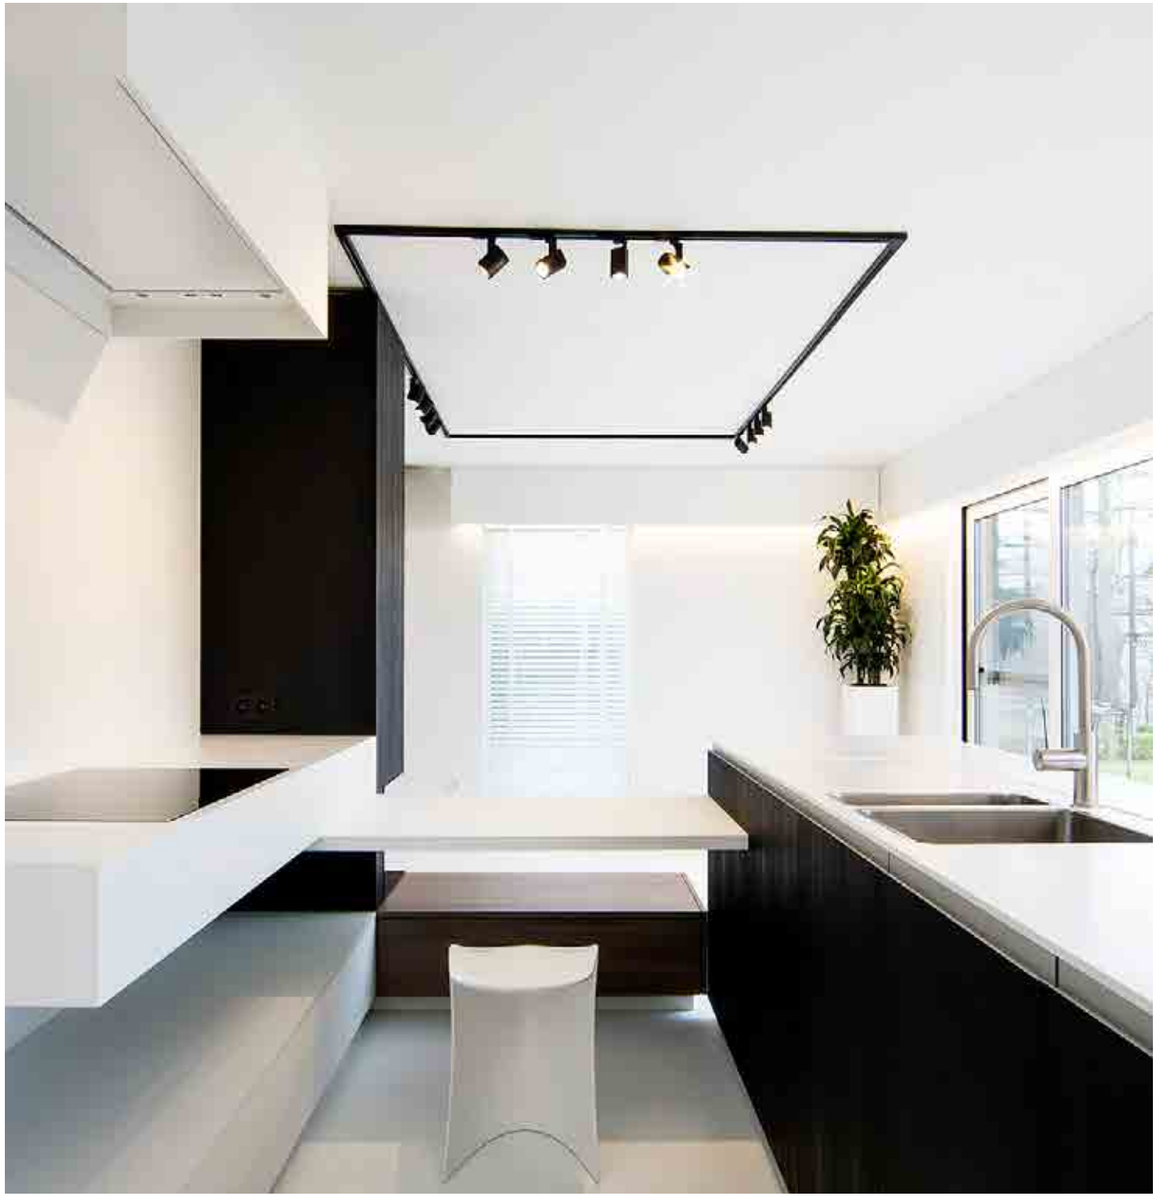

PRIVATE RESIDENCE | LOFT4C INTERIEURARCHITECTEN BELGIUM

THE AUDO | NORM ARCHITECTS | ~~ANKER & CO~~ KOPENHAGEN | DENMARK
back

PRIVATE RESIDENCE GERMANY

CENO fort on track

3-PHASE

p. 219 p. 317



1.0

LED 43W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | DALI dim
incl. 3-phase track adapter

0.78kg IP20 0.3 24° 90° 355°

	CODE
	166964W_
	166964B_

LIGHT COLOUR	LUMEN | CRI	CODE
3000K	2650 | >90	5
4000K	2830 | >90	7

inner ring is always black

available from autumn 2021

OPTIONAL

Honeycomb

	CODE
	90051132

Rev. 001/2021-07

back

FLOKK A/S | PETER HAMMER | ANKER & CO NORDHAVN | DENMARK

white luminaires come with a white cable and adapter. Other colours are standard with black cable and adapter. Alternative colour combinations on request.



RAY 2.0 | 3.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed | incl. 3-phase track
adapter

0.62 | 0.76kg IP20 0,3 36°

2.0

200mm	CODE
	217364W_
	217364L_
	217364G_
	217364P_
	217364B_

3.0

300mm	CODE
	217464W_
	217464L_
	217464G_
	217464P_
	217464B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	420 | >90	3
3000K	440 | >90	5
1800-2850K	360 | >95	9



RAY 2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed | incl. 3-phase track
adapter

0.54 | 0.68kg IP20 0,3

2.0

200mm	CODE
	217320W0
	217320L0
	217320G0
	217320P0
	217320B0

3.0

300mm	CODE
	217420W0
	217420L0
	217420G0
	217420P0
	217420B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729



HEXO 2.0 | 3.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed | incl. 3-phase track
adapter

0.66 | 0.82kg IP20 0,3 36°

2.0

200mm	CODE
	215364G_
	215364Q_
	215364P_
	215364B_

3.0

300mm	CODE
	215464G_
	215464Q_
	215464P_
	215464B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	420 | >90	3
3000K	440 | >90	5
1800-2850K	360 | >95	9



HEXO 2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed | incl. 3-phase track
adapter

0.58 | 0.74kg IP20 0,3

2.0

200mm	CODE
	215320G0
	215320Q0
	215320P0
	215320B0

3.0

300mm	CODE
	215420G0
	215420Q0
	215420P0
	215420B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

back

ELLO SYSTEM

CEILING SURFACE | SUSPENDED

p. 465

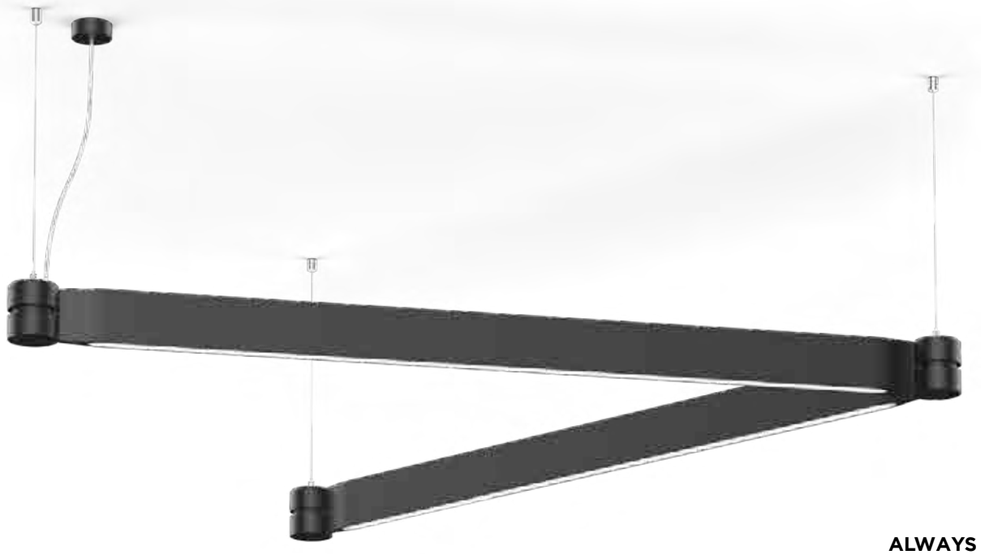



A | 1.0

LED 18W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS
aluminium powder coated
opal PMMA cover

1.70kg IP20

phase-cut dim | 3000K | >90 CRI | 1090lm

	CODE
	500184W5
	500184B5

DALI dim | 3000K | >90 CRI | 1090lm

	CODE
	500185W5
	500185B5

ALWAYS USE

B | connector point
phase-cut dim up to max. 4 fixtures
DALI dim up to max. 2 fixtures

	CODE
	900190W1
	900190B1

OPTIONAL

C | steel suspension cable

	CODE
2.0m	90015102

D1 | power feeder for phase-cut dim
incl. steel suspension cable 2.0m
max. 10 luminaires per power feeder

	CODE
	90018010
	90018011

D2 | power feeder for DALI 2.0m
incl. steel suspension cable 2.0m
max. 10 luminaires per power feeder

	CODE
	90018012
	90018013

SURFACE EXAMPLES

configuration as seen from top view | minimum angle 45°

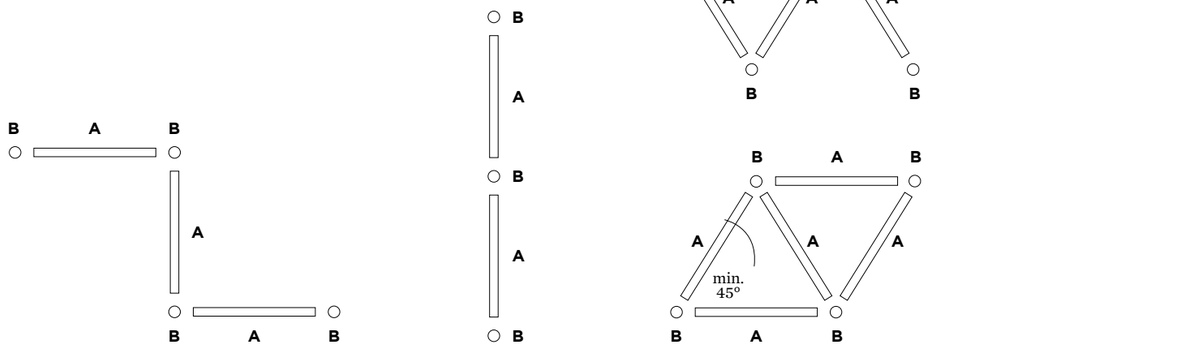

DESIGNED BY
S&R CORNELISSEN

SUSPENDED EXAMPLES

configuration as seen from top view | minimum angle 45°
can be used up or down (direct or indirect)

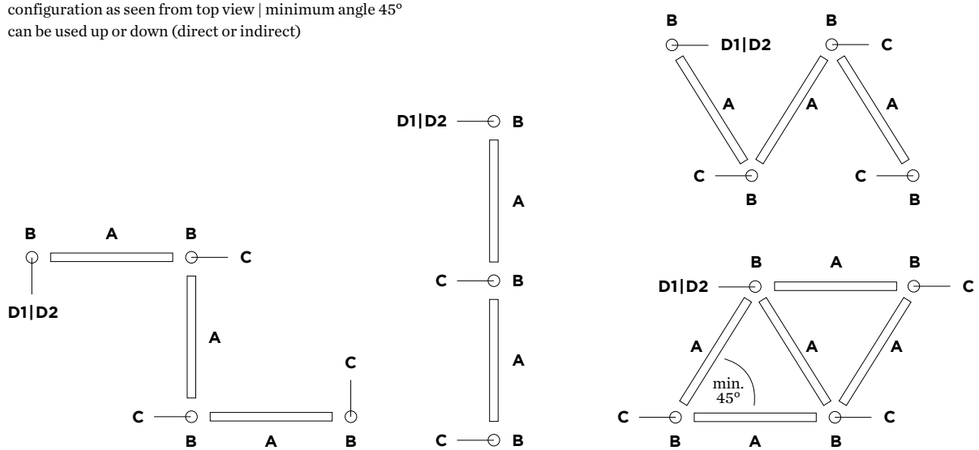

back

SLEEVESUP! SPACES GMBH GIESSEN | GERMANY

SLEEVESUP! SPACES GMBH HANNOVER | GERMANY

OFFICE KR PROPERTIES | H2A ARCHITECURAL GROUP | K2 LIGHT ARCHITECTURE MOSCOW | RUSSIA

OFFICE WESTERNACHER SOLUTIONS AG | JENNIFER BÜHLING DESIGNFUNKTION BERLIN | GERMANY

YEP, RIGHT THERE

SPOT LANDING FOR YOUR FAVOURITE LIGHT

There's certainly one question you no longer need to ask: Where is the power outlet? That's because this doesn't really matter with PIRRO SYSTEM. After all, lights can be optically positioned precisely where they look just right – perfect, in fact. How does it work? PIRRO opal and PIRRO spot insets can be attached to two rails of different lengths and in many different versions. This lets you create a small work of art on every ceiling reminiscent of well-known Bauhaus classics – and that's no coincidence. Serge Cornelissen used exactly those classics as models or his lamp creation, which above all sets itself apart with its functionality, style and minimalism. A true success story, if we do say to ourselves. We'd like to add that the PIRRO SYSTEM is available in subtle white, gold or black, and can be combined with insets in two sizes and four different colours.

Eine Frage müssen Sie sich ab sofort bestimmt nicht mehr stellen und zwar: Wo ist hier der Stromauslass? Denn das ist mit PIRRO SYSTEM ziemlich egal. Schließlich lassen sich Leuchten damit optisch punktgenau dort platzieren, wo sie einfach richtig und zwar richtig gut aussehen. Wie's funktioniert? PIRRO Opal und PIRRO Spot Insets können auf zwei unterschiedlich langen Schienen und in vielen verschiedenen Varianten angebracht werden. So entsteht an jeder Decke ein kleines Kunstwerk, das nicht umsonst an bekannte Bauhaus-Klassiker denken lässt. Genau die dienten Serge Cornelissen nämlich als Vorbild für seine Leuchten-Kreation, die vor allem durch Funktionalität, Stil und Minimalismus besticht. Echt gelungen, finden wir und fügen hinzu, dass PIRRO SYSTEM in dezentem Weiß, Gold oder Schwarz zu haben ist und mit Insets in zwei Größen und vier verschiedenen Farbvarianten kombiniert werden kann.

HOW TO COMBINE YOUR PIRRO SYSTEM

CEILING BASE SURFACE

available in white, gold or black



1.0

755 mm



2.0

1150 mm

PIRRO OPAL OR SPOT INSETS

available in white and black, white and gold, black and gold or black

2.0

opal

2.0

spot

4.0

opal

4.0

spot

CREATE YOUR OWN DESIGN

some examples



ceiling base 1.0 with insets

755 mm



ceiling base 2.0 with insets

1150 mm

back

PRIVATE RESIDENCE GERMANY

PIRRO SYSTEM

CEILING SURFACE

p. 189 p. 289

ALWAYS USE

2.0 OPAL

LED 7W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated
opal PMMA cover

0.30kg IP20

	CODE
	151281E_
	151281J_
	151281K_
	151281B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	240 | >90	3
3000K	260 | >90	5

2.0 SPOT

LED 2x LED 5W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim | aluminium powder coated
PC lens and reflector

0.30kg IP20 32°

	CODE
	151251E_
	151251J_
	151251K_
	151251B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	2x380 | >90	3
3000K	2x405 | >90	5





1.0 CEILING BASE

ceiling base for 2 insets
aluminium powder coated

0.45kg

	CODE
	90052072
	90052074
	90052073

2.0 CEILING BASE

ceiling base for 3 insets
aluminium powder coated

0.70kg

	CODE
	90052075
	90052077
	90052076

4.0 OPAL

LED 12W | 220-240VAC |50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated
opal PMMA cover

0.52kg IP20

	CODE
	151481E_
	151481J_
	151481K_
	151481B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	550 | >90	3
3000K	580 | >90	5

4.0 SPOT

LED 4x LED 5W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim | aluminium powder coated
PC lens and reflector

0.48kg IP20 32°

	CODE
	151451E_
	151451J_
	151451K_
	151451B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	4x380 | >90	3
3000K	4x405 | >90	5

available from summer 2021

back

PRIVATE RESIDENCE BELGIUM

ILANE

CEILING SURFACE

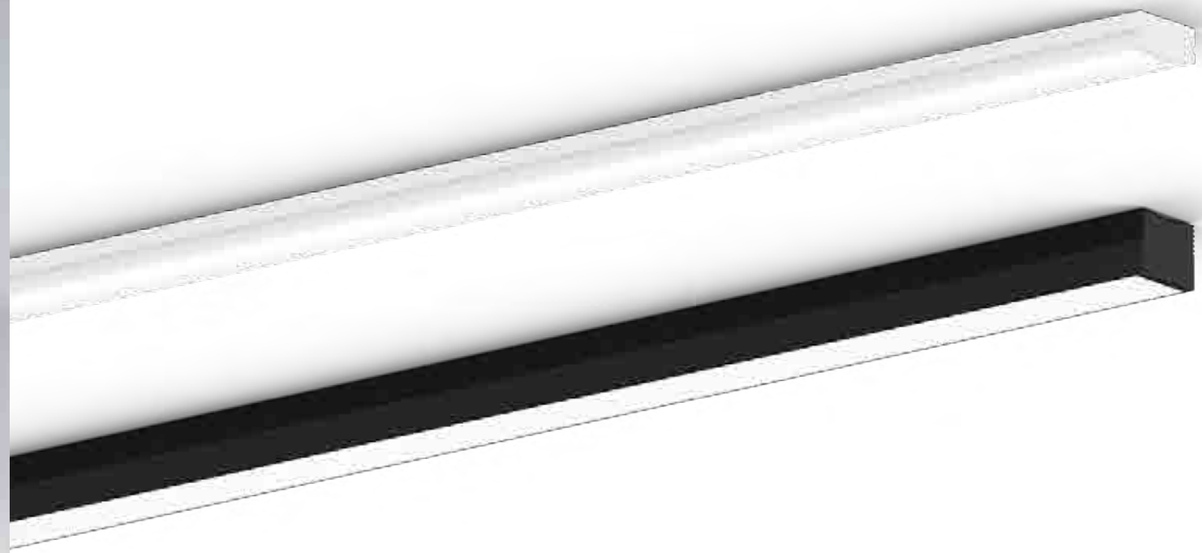



black diffuser detail



flush with plasterboard

available from summer 2021



1.0

aluminium wet painted or anodised diffuser | included end caps and mounting clips

0.11kg/m

		CODE
	2.0m	911991W2
	2.0m	911991B2

		CODE
	3.0m	911991W3
	3.0m	911991B3



2.0

aluminium wet painted or anodised diffuser | included end caps and mounting clips

0.19kg/m

		CODE
	2.0m	911992W2
	2.0m	911992B2

		CODE
	3.0m	911992W3
	3.0m	911992B3

ALWAYS USE

LED COB strip IP20 | 800lm/m
10W/m | incl. connector cable

	CODE
2.0m	9003S21_
3.0m	9003S31_
5.0m	9003S41_

LED COB strip IP20 | 1250lm/m
15W/m | incl. connector cable

	CODE
2.0m	9003S22_
3.0m	9003S32_
5.0m	9003S42_

for net output of LED strip on profiles, check weverducre.com/ilane

LIGHT COLOUR	CRI	CODE
2700K	>90	3
3000K	>90	5

ALWAYS USE

Double side adhesive tape
for invisible profile fixation

	CODE
3.0m	90019199

more accessories on page 739

Power supply

	CODE
35W | 24V	90212801
100W | 24V	90212902

phase-cut dim

	CODE
25W | 24V	90222701
50W | 24V	90222901

more specs on page 726

OPTIONAL

Black diffuser
only for 1.0

	CODE
2.0m	911902B1
3.0m	911903B1

back

ILANE

CEILING SURFACE | RECESSED

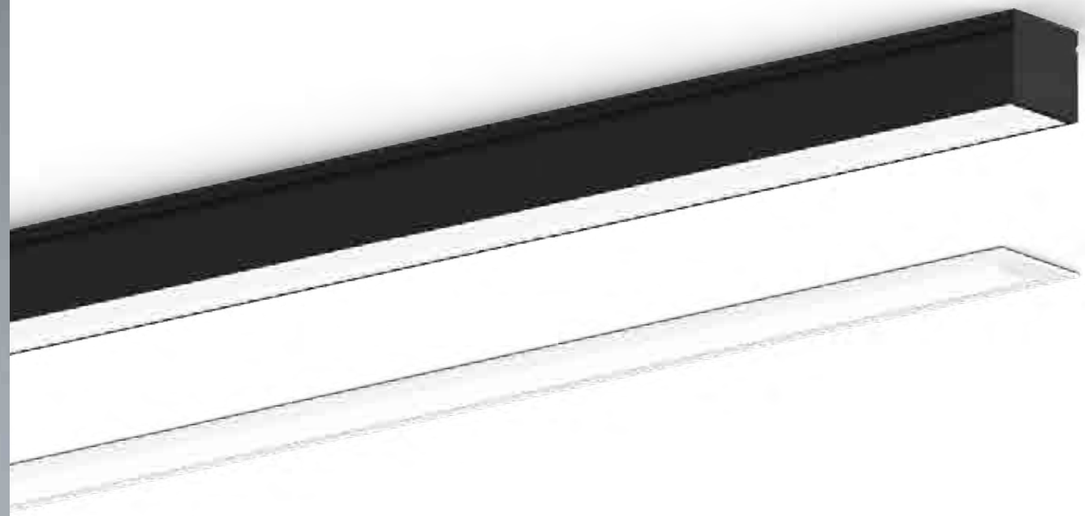

black diffuser detail



available from summer 2021



3.0

aluminium wet painted or anodised diffuser | included end caps and invisible mounting clips

0.26kg/m Ⓟ

		CODE
	2.0m	911993W2
	2.0m	911993B2
	3.0m	911993W3
	3.0m	911993B3



4.0

aluminium wet painted or anodised diffuser | included end caps and mounting clips

0.24kg/m Ⓟ 21 20

		CODE
	2.0m	911994W2
	2.0m	911994B2
	3.0m	911994W3
	3.0m	911994B3

ALWAYS USE

LED COB strip IP20 | 800lm/m
10W/m | incl. connector cable

	CODE
2.0m	9003S21
3.0m	9003S31
5.0m	9003S41

LED COB strip IP20 | 1250lm/m
15W/m | incl. connector cable

	CODE
2.0m	9003S22
3.0m	9003S32
5.0m	9003S42

LED COB strip IP65 | 780lm/m
8W/m | incl. connector cable

	CODE
2.0m	9003S61
3.0m	9003S71
5.0m	9003S81

LED COB strip IP65 | 1350lm/m
14.4W/m | incl. connector cable

	CODE
2.0m	9003S62
3.0m	9003S72
5.0m	9003S82

for net output of LED strip on profiles, check weverducre.com/ilane

LIGHT COLOUR	CRI	CODE
2700K	>90	3
3000K	>90	5

more accessories on page 739

ALWAYS USE

Power supply

	CODE
35W | 24V	90212801
100W | 24V	90212902

phase-cut dim

	CODE
25W | 24V	90222701
50W | 24V	90229901

more specs on page 726

OPTIONAL

Black diffuser
only for 3.0

	CODE
2.0m	911912B1
3.0m	911913B1

back

CEILING SUSPENDED

p. 415— 499

CEILING SUSPENDED SINGLE

ODREY
p. 419

RAY
p. 425

BOX
p. 427

DOCUS
p. 429

HEXO
p. 431

SHIEK 1.0
p. 435

SHIEK 3.0
p. 437

SHIEK 4.0
p. 439

WETRO
p. 443

SELO
p. 451

DINOR 1.0
p. 453

DINOR 2.0
p. 453

DINOR 3.0
p. 453

CORK
p. 457

CONE
p. 459

BISHOP
p. 461

ELLO
p. 465

DARF
p. 467

VENN
p. 471

GIGANT
p. 473

CYCLONE
p. 477

CEILING SUSPENDED MULTI

ODREY MULTI
p. 485

RAY MULTI
p. 487

BOX MULTI
p. 489

DOCUS MULTI
p. 491

HEXO MULTI
p. 493



WETRO MULTI
p. 495

SHIEK MULTI
p. 497

DESIGNER FAMILIES

ROOMOR TUBE SUSPENDED
p. 29

ROOMOR OFFICE CABLE SUSPENDED
p. 33

ROOMOR OFFICE TUBE SUSPENDED
p. 35

MIRRO
p. 57

DRO
p. 71

ROCK
p. 85

WIRO
p. 93

REVER
p. 143

J.J.W.
p. 135

back

LOOK WHO CAME TO DINNER

ODREY ON THE CEILING

Looking for a surprise guest for your dinner party? Let ODREY shine from the ceiling. After all, this elegant luminaire is fantastic with its eight different shade shapes and two variable inner covers. Don't be surprised if your guests frequently look up at the ceiling. It's hard to resist the temptation when the elegant ODREY winks from its black or gold shade. By the way, if you really want something unique, choose a mounting in a contrasting colour. You can choose between black and gold.

Sie suchen nach einem Überraschungsgast für Ihre Dinnerparty? Dann lassen Sie doch einfach ODREY von der Decke strahlen. Schließlich beeindruckt die elegante Leuchte nicht nur mit acht verschiedenen Schirmformen, sondern auch mit zwei variablen Innencover. Wundern Sie sich also nicht, wenn Ihre Gäste öfter mal nach oben sehen. Wenn die elegante ODREY mit einem Shade in Gold oder Schwarz von der Decke blinzelt, kann man dieser Versuchung kaum widerstehen. Übrigens: Wer's noch individueller mag, kann das Mounting in einer Kontrastfarbe wählen. Zur Auswahl stehen schwarz oder gold.

CREATE YOUR VERY OWN ODREY

MOUNTING + SHADE + INNER COVER

MOUNTING
available in ● black or ● gold

1.0

+

SHADES
available in ● black or ● gold

1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0
ø55	ø250	ø100	ø124	ø115	ø190	ø150	ø250

+ + +

OPTIONAL INNER COVERS
available in ● black or ● gold

1.0 1.0 1.0

HAVE A LOOK
weverducre.com/odrey-configurator

back

ODREY

CEILING SUSPENDED

p. 367
p. 385
p. 519



1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted

0.22kg IP20

	CODE
	257120G0
	257120B0

ALWAYS USE

shade 1.0 - 8.0 in gold

	CODE
1.0	911421G1
2.0	91140GG0
2.0	91140GB0
3.0	911423G1
4.0	911424G1
5.0	911425G1
6.0	911426G1
7.0	911427G1
8.0	911428G1

shade 1.0 - 8.0 in black

	CODE
1.0	911421B1
2.0	91140BB0
2.0	91140BG0
3.0	911423B1
4.0	911424B1
5.0	911425B1
6.0	911426B1
7.0	911427B1
8.0	911428B1

ALWAYS USE

A | Single suspension
ceiling base round

	CODE
	90052022
	90052021

B | Single ceiling base semi recessed

	CODE
	90052026
	90052027

C | Invisible ceiling suspension
plasterkit | system - with fixation and adjustment

	CODE
	90015196
	90015195

OPTIONAL

inner cover 1.0

	CODE
	911420G0
	911420B0

suitable for shades 6.0 | 7.0 | 8.0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K	901228B3
3000K	901228B5

more lamps and specs on page 729

back

PRIVATE RESIDENCE NETHERLANDS

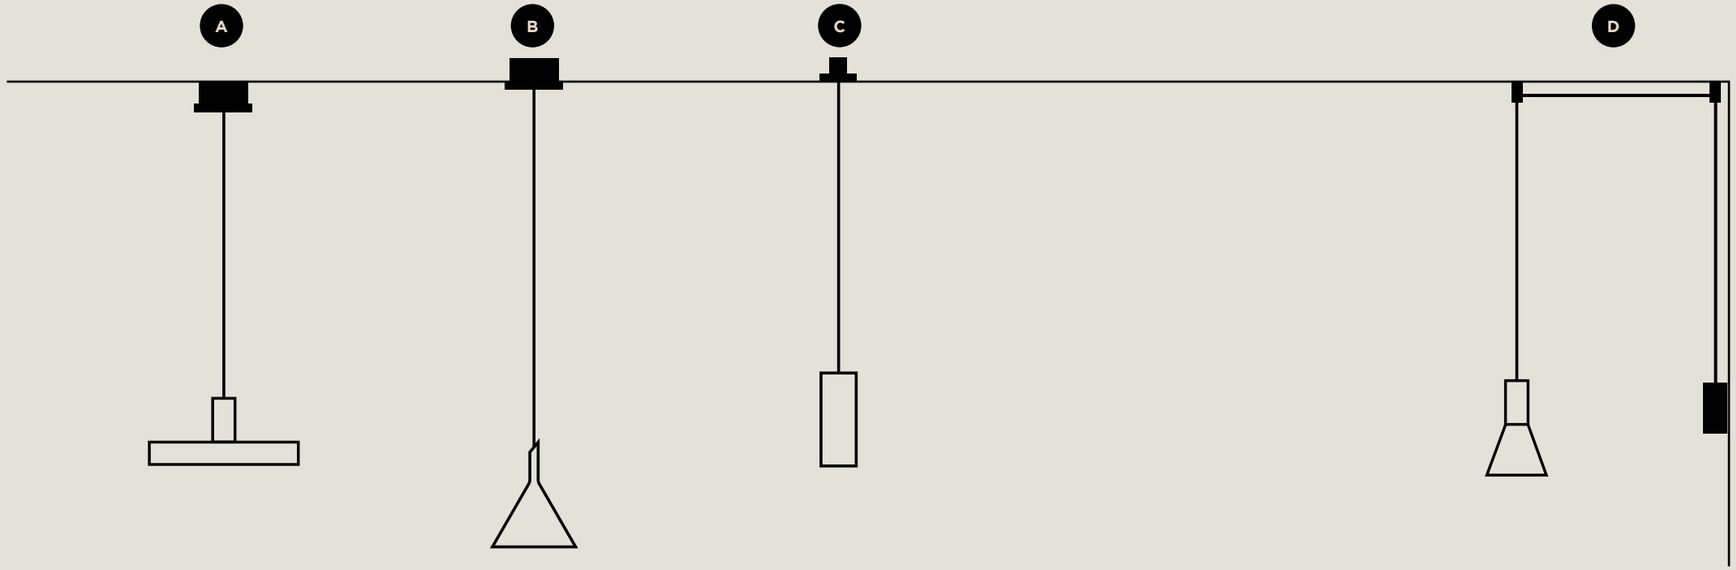

SINGLE SUSPENSION OPTIONS

FOR 1 LUMINAIRE

IT'S A MATCH!

You've fallen in love with one of our luminaires, and now you're looking for the right ceiling rose? Let's play a quick game of Matchmaker here. You have four basic options. The first is the classic surface version. Alternatively, you can choose the semi-recessed version, where the ceiling rose can also be hidden in the ceiling but with a cover that can always be opened for maintenance. Or you can opt for the more subtle invisible version, where the installed ceiling rose disappears into the plaster ceiling. And last but not least, the wall base with integrated switch. Did you find a match? All you need to do now is pick the right colour.

Sie haben sich in eine unserer Leuchten verliebt und suchen jetzt nach dem passenden Baldachin? Dann spielen wir hier mal kurz die Vermittlungsbörse. Grundsätzlich können Sie zwischen vier Möglichkeiten wählen: Der klassischen Aufbauvariante, der Semi-recessed-Variante, die den Baldachin auch in der Decke verschwinden lässt, den man aber zu Wartungszwecken jederzeit öffnen kann und der superdezenten Invisible-Version, bei der man den Baldachin in der Gipsdecke einbaut und der damit unsichtbar wird. Und zu guter Letzt die Wandvariante mit integriertem Lichtschalter. Na, ein Match gefunden? Dann müssen Sie sich jetzt nur noch für die passende Farbe entscheiden.

ODREY	p. 419
RAY	p. 425
BOX	p. 427
DOCUS	p. 429
HEXO	p. 431
SHIEK	p. 435
WETRO	p. 443
SELO	p. 451
DINOR	p. 453

For WALL BASE ROUND, we recommend ordering at least 4 m of cable, for details please see the multi chapter starting on page 480.

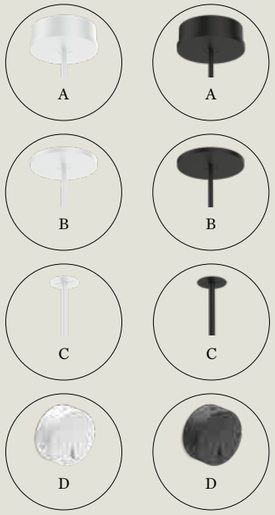

A

SINGLE SUSPENSION
ceiling base round

	CODE
	90052022
	90052021

B



SINGLE CEILING BASE
semi recessed

	CODE
	90052026
	90052027

more information on page 741

C

INVISIBLE CEILING SUSPENSION
plasterkit | system - with fixation and adjustment

	CODE
	90015196
	90015195

more information on page 741

D



WALL BASE ROUND
wall base round for 1 luminaire
incl. switch on/off
incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196

more specs on page 742

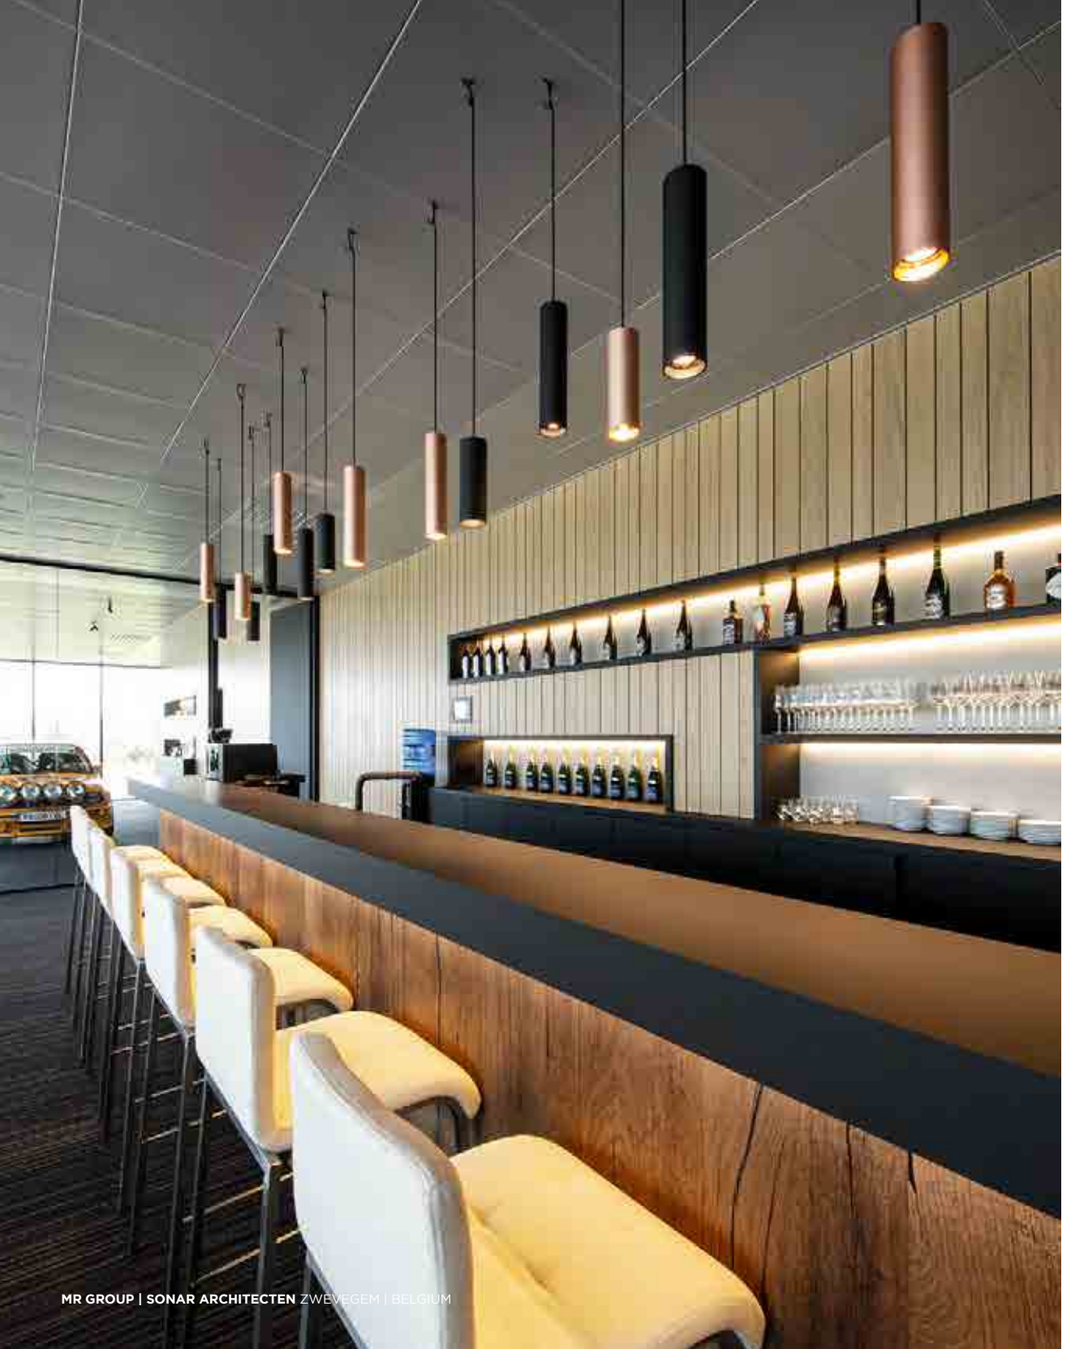

MR GROUP | SONAR ARCHITECTEN ZWEVEGEM | BELGIUM

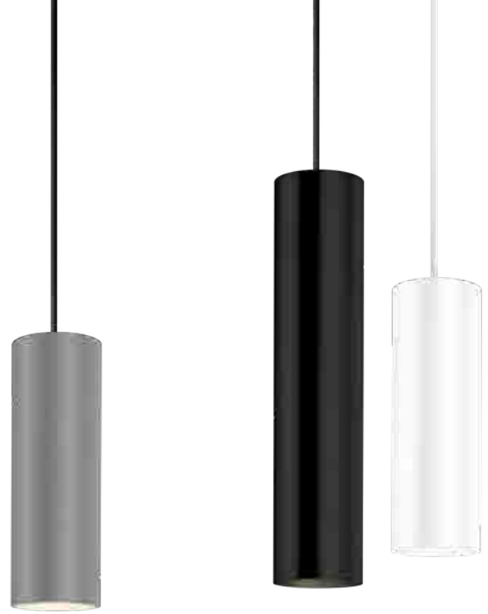





RAY

CEILING SUSPENDED

p. 263 p. 387 p. 399 p. 527 p. 607 p. 633



2.0 | 3.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.62 | 0.76kg IP20 0,3 36°

2.0

200mm	CODE
	217164W_
	217164L_
	217164G_
	217164P_
	217164B_

3.0

300mm	CODE
	217264W_
	217264L_
	217264G_
	217264P_
	217264B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	420 | >90	3
3000K	440 | >90	5
1800-2850K	360 | >95	9



2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.54 | 0.68kg IP20 0,3

2.0

200mm	CODE
	217120W0
	217120L0
	217120G0
	217120P0
	217120B0

3.0

300mm	CODE
	217220W0
	217220L0
	217220G0
	217220P0
	217220B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

ALWAYS USE

A | Single suspension
ceiling base round

	CODE
	90052022
	90052021

B | Single ceiling base semi recessed

	CODE
	90052026
	90052027

C | Invisible ceiling suspension
plasterkit | system - with fixation
and adjustment

	CODE
	90015196
	90015195

multi suspension options on page 480

white luminaires come with a white cable; other colours are standard with black cable

alternative colour combinations on request

back

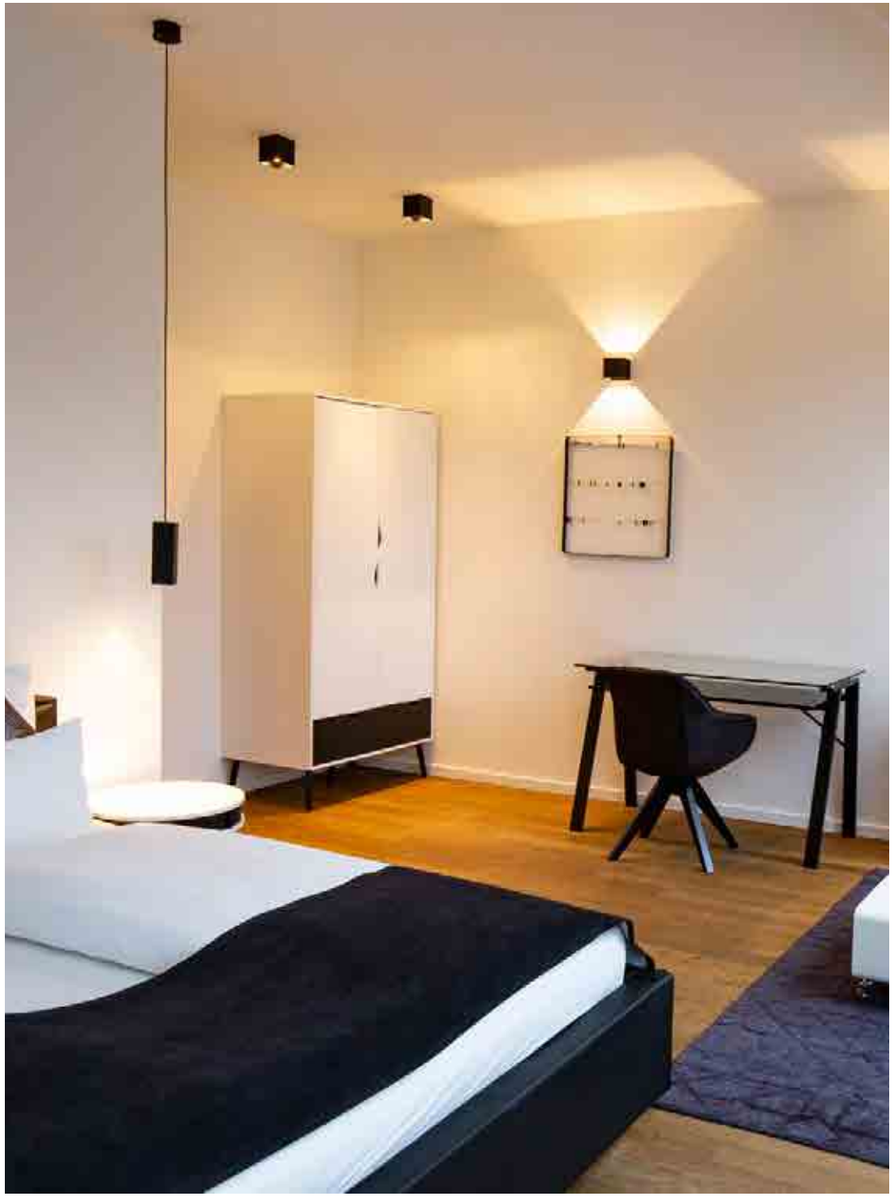

GAPSITE HOTEL | KADLETZ ARCHITEKTUR GRAZ | AUSTRIA





BOX

CEILING SUSPENDED

p. 271 p. 535 p. 611 p. 641





2.0 | 3.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.66 | 0.83kg IP20 3-step dim 36°

2.0

200mm	CODE
	214164W_
	214164L_
	214164P_
	214164B_

3.0

300mm	CODE
	214264W_
	214264L_
	214264P_
	214264B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	420 | >90	3
3000K	440 | >90	5
1800-2850K	360 | >95	9

2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.59 | 0.76kg IP20 dim

2.0

200mm	CODE
	214120W0
	214120L0
	214120P0
	214120B0

3.0

300mm	CODE
	214220W0
	214220L0
	214220P0
	214220B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

ALWAYS USE

A | Single suspension
ceiling base round

	CODE
	90052022
	90052021

B | Single ceiling base semi recessed

	CODE
	90052026
	90052027

C | Invisible ceiling suspension
plasterkit | system - with fixation
and adjustment

	CODE
	90015196
	90015195

multi suspension options on page 480

white luminaires come with a white cable; other colours are standard with black cable

alternative colour combinations on request

back

SHOWROOM | GRANDO KEUKENS BRUGGE | BELGIUM





DOCUS

CEILING SUSPENDED

p. 279





2.0 | 3.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.66 | 0.82kg IP20 0,3•D 36°

2.0

200mm	CODE
	216164W_
	216164G_
	216164P_
	216164B_

3.0

300mm	CODE
	216264W_
	216264L_
	216264G_
	216264P_
	216264B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	420 | >90	3
3000K	440 | >90	5
1800-2850K	360 | >95	9

2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.59 | 0.72kg IP20 0,3•D

2.0

200mm	CODE
	216120W0
	216120G0
	216120P0
	216120B0

3.0

300mm	CODE
	216220W0
	216220L0
	216220G0
	216220P0
	216220B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

ALWAYS USE

A | Single suspension
ceiling base round

	CODE
	90052022
	90052021

B | Single ceiling base semi recessed

	CODE
	90052026
	90052027

C | Invisible ceiling suspension
plasterkit | system - with fixation and adjustment

	CODE
	90015196
	90015195

multi suspension options on page 480

white luminaires come with a white cable; other colours are standard with black cable

alternative colour combinations on request

back

GREENHOUSE BXL | INTERVEST OFFICES & WAREHOUSES DIEGEM | BELGIUM

HEXO

CEILING SUSPENDED

p. 285 p. 387 p. 399



2.0 | 3.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.66 | 0.82kg IP20 3-step-dim 36°

2.0

200mm	CODE
	215164G_
	215164Q_
	215164P_
	215164B_

3.0

300mm	CODE
	215264G_
	215264Q_
	215264P_
	215264B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	420 | >90	3
3000K	440 | >90	5
1800-2850K	360 | >95	9



2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.58 | 0.74kg IP20 3-step-dim

2.0

200mm	CODE
	215120G0
	215120Q0
	215120P0
	215120B0

3.0

300mm	CODE
	215220G0
	215220Q0
	215220P0
	215220B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729





ALWAYS USE

A | Single suspension
ceiling base round

	CODE
	90052022
	90052021

B | Single ceiling base semi recessed

	CODE
	90052026
	90052027

C | Invisible ceiling suspension
plasterkit | system - with fixation
and adjustment

	CODE
	90015196
	90015195

multi suspension options on page 480

all luminaires come with a black cable;
white cable possible on request

back

BOSSUYT SHOP INTERIORS KUURNE | BELGIUM

back

PRIVATE RESIDENCE | EVA CARLIER INTERIOR DESIGN BELGIUM

SHIEK

CEILING SUSPENDED

DESIGNED BY
3H DRAFT



white cable on request





1.0 LED

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated lacquered | incl. 1x strain relief and hook

0.36 kg | IP20

1800-2850K | >90 CRI | 510lm

	CODE
	237189W9
	237189J9
	237189P9
	237189K9
	237189Z9

2.0 LED

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated lacquered | incl. 1x strain relief and hook

0.47 kg | IP20

1800-2850K | >90 CRI | 510lm

	CODE
	237289W9
	237289J9
	237289P9
	237289K9
	237289Z9

ALWAYS USE

A | Single suspension
ceiling base round

	CODE
	90052022
	90052021

B | Single ceiling base semi recessed

	CODE
	90052026
	90052027

C | Invisible ceiling suspension
plasterkit | system - with fixation and adjustment

	CODE
	90015196
	90015195

multi suspension options on page 480

back

PRIVATE RESIDENCE | ARCHITECT ROACH YOUNG STUDIO UNITED KINGDOM

SHIEK

CEILING SUSPENDED

reddot award 2017
winner

DESIGN AWARD 2017

As awarded by The Chicago Athenaeum: Museum of Architecture and Design

DESIGNED BY
3H DRAFT

white cable on request



3.0 LED

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated lacquered | incl. 1x strain relief and hook

0.60 kg | IP20

1800-2850K | >90 CRI | 510lm

CODE
237389W9
237389J9
237389P9
237389K9
237389Z9



3.0 E27

E27 max. 20W | A60 | 100-240VAC
50-60Hz | aluminium powder coated | lacquered | incl. 1x strain relief and hook

0.60 kg | IP20

CODE
2343E8W0
2343E8J0
2343E8P0
2343E8K0
2343E8Z0

ALWAYS USE

A | Single suspension
ceiling base round

CODE
90052022
90052021

B | Single ceiling base semi recessed

CODE
90052026
90052027

C | Invisible ceiling suspension
plasterkit | system - with fixation and adjustment

CODE
90015196
90015195

multi suspension options on page 480

back

HARGASSNER ENERGY WORLD LINZ | AUSTRIA

SHIEK

CEILING SUSPENDED

DESIGNED BY
3H DRAFT

white cable on request



4.0 LED

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
lacquered | incl. 1x strain relief
and hook

0.70 kg IP20

1800-2850K | >90 CRI | 510lm

CODE
237489W9
237489J9
237489P9
237489K9
237489Z9



4.0 E27

E27 max. 20W | A60 | 100-240VAC
50-60Hz | aluminium powder
coated | lacquered | incl. 1x strain
relief and hook

0.70 kg IP20

CODE
2344E8W0
2344E8J0
2344E8P0
2344E8K0
2344E8Z0

ALWAYS USE

A | Single suspension
ceiling base round

CODE
90052022
90052021

B | Single ceiling base semi recessed

CODE
90052026
90052027

C | Invisible ceiling suspension
plasterkit | system - with fixation
and adjustment

CODE
90015196
90015195

multi suspension options on page 480

back

PRIVATE RESIDENCE OBUMEX – STEENOVEN BELGIUM

SHIEK

CEILING SUSPENDED

DESIGNED BY
3H DRAFT



white cable on request



5.0 LED

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
lacquered | incl. 1x strain relief
and hook

0.80 kg IP20

1800-2850K | >90 CRI | 510lm

CODE
237589W9
237589J9
237589P9
237589K9
237589Z9

5.0 E27

E27 max. 20W | A60 | 100-240VAC
50-60Hz | aluminium powder
coated | lacquered | incl. 1x strain
relief and hook

0.80 kg IP20

CODE
2345E8W0
2345E8J0
2345E8P0
2345E8K0
2345E8Z0

ALWAYS USE

A | Single suspension
ceiling base round

CODE
90052022
90052021

B | Single ceiling base semi recessed

CODE
90052026
90052027

C | Invisible ceiling suspension
plasterkit | system - with fixation
and adjustment

CODE
90015196
90015195

multi suspension options on page 480

back

FASHION STORE 'T KAPELLEKE | BOSSUYT SHOP INTERIORS DEERLIJK | BELGIUM

WETRO

CEILING SUSPENDED

DESIGNED BY
3H DRAFT



white cable on request



1.0

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
artisanal hand blown glass | incl.
1x strain relief and hook

0.56 kg | IP20

1800-2850K | >90 CRI | 340lm

CODE

236189P9
236189B9



2.0

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
artisanal hand blown glass | incl.
1x strain relief and hook

0.97 kg | IP20

1800-2850K | >90 CRI | 340lm

CODE

236289P9
236289B9



3.0

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
artisanal hand blown glass | incl.
1x strain relief and hook

1.69 kg | IP20

1800-2850K | >90 CRI | 340lm

CODE

236389P9
236389B9

ALWAYS USE

A | Single suspension
ceiling base round

CODE

90052022
90052021

B | Single ceiling base semi recessed

CODE

90052026
90052027

C | Invisible ceiling suspension
plasterkit | system - with fixation and adjustment

CODE

90015196
90015195

multi suspension options on page 480

back

PRIVATE RESIDENCE | AUFSCHNAITER GESMBH & CO KG AUSTRIA

BAR OSLO | NORWAY

WETRO

CEILING SUSPENDED

DESIGNED BY
3H DRAFT

white cable on request

Italian hand blown glass



1.0

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
artisanal hand blown glass | incl.
1x strain relief and hook

0.56 kg | IP20

1800-2850K | >90 CRI | 340lm

	CODE
	236189TS9
	236189TD9



2.0

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
artisanal hand blown glass | incl.
1x strain relief and hook

0.97 kg | IP20

1800-2850K | >90 CRI | 340lm

	CODE
	236289TS9
	236289TD9



3.0

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
artisanal hand blown glass | incl.
1x strain relief and hook

1.69 kg | IP20

1800-2850K | >90 CRI | 340lm

	CODE
	236389TS9
	236389TD9

ALWAYS USE

A | Single suspension
ceiling base round

	CODE
	90052022
	90052021

B | Single ceiling base semi recessed

	CODE
	90052026
	90052027

C | Invisible ceiling suspension
plasterkit | system - with fixation and adjustment

	CODE
	90015196
	90015195

multi suspension options on page 480

back

PRIVATE RESIDENCE | BOKETTO 2 INTERIEUR BELGIUM

WETRO

CEILING SUSPENDED

DESIGNED BY
3H DRAFT

TAUPE WHITE GLASS
ON

TAUPE WHITE GLASS
OFF

white cable on request

Italian hand blown glass



1.0

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
artisanal hand blown glass | incl.
1x strain relief and hook

0.56 kg IP20

1800-2850K | >90 CRI | 340lm

CODE
236189TW9



2.0

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
artisanal hand blown glass | incl.
1x strain relief and hook

0.97 kg IP20

1800-2850K | >90 CRI | 340lm

CODE
236289TW9



3.0

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
artisanal hand blown glass | incl.
1x strain relief and hook

1.69 kg IP20

1800-2850K | >90 CRI | 340lm

CODE
236389TW9

ALWAYS USE

A | Single suspension
ceiling base round

CODE
90052022
90052021

B | Single ceiling base semi recessed

CODE
90052026
90052027

C | Invisible ceiling suspension
plasterkit | system - with fixation and adjustment

CODE
90015196
90015195

multi suspension options on page 480

back

BLIQUE BY NOBIS STOCKHOLM | SWEDEN

SELO

CEILING SUSPENDED



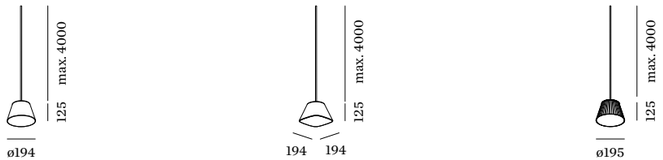

1.0

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim | porcelain | incl. 1x strain relief and hook

0.80 kg | IP20

1800-2850K | >90 CRI | 510lm

CODE
235189W9

2.0

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim | porcelain | incl. 1x strain relief and hook

0.96 kg | IP20

1800-2850K | >90 CRI | 510lm

CODE
235289W9

3.0

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim | porcelain | incl. 1x strain relief and hook

0.80 kg | IP20

1800-2850K | >90 CRI | 510lm

CODE
235389W9

ALWAYS USE

A | Single suspension
ceiling base round

CODE
90052022
90052021

B | Single ceiling base semi recessed

CODE
90052026
90052027

C | Invisible ceiling suspension
plasterkit | system - with fixation and adjustment

CODE
90015196
90015195

back

PRIVATE RESIDENCE | LANCO DESIGN BELGIUM







white cable on request

DINOR

CEILING SUSPENDED

DESIGNED BY
3H DRAFT





1.0

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium wet painted | incl. 1x strain relief and hook

0.90 kg | IP20

1800-2850K | >90 CRI | 510lm

CODE
255189RW9
255189GW9
2551890K9
2551890B9

2.0

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium wet painted | incl. 1x strain relief and hook

1.30 kg | IP20

1800-2850K | >90 CRI | 510lm

CODE
255289RW9
255289GW9
2552890K9
2552890B9

3.0

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium wet painted | incl. 1x strain relief and hook

2.30 kg | IP20

1800-2850K | >90 CRI | 510lm

CODE
255389RW9
255389GW9
2553890K9
2553890B9

ALWAYS USE

A | Single suspension
ceiling base round

CODE
90052022
90052021

B | Single ceiling base semi recessed

CODE
90052026
90052027

C | Invisible ceiling suspension
plasterkit | system - with fixation and adjustment

CODE
90015196
90015195

back

MAGAZIN AUF EF HERTEN | GERMANY

CORK

CEILING SUSPENDED



1.0

LED 3W | 120-240VAC | 50-60Hz
PCB 3-step | incl. PS
aluminium powder coated
fits bottles inner ø16.5 - 19.5 mm
and max. 1kg

0.24kg IP20 0.3+ 6 36°

	CODE
	210163W_
	210163B_

LIGHT COLOUR	LUMEN | CRI	CODE
2200K	120 | >80	1
2700K	180 | >80	2

OPTIONAL

	CODE
bottle 1	
75/174 | glass	90019013
bottle 2	
87/323 | glass	90019014

back

HOTEL LILLA ROBERTS | PUROPLAN OY & TECLUX OY HELSINKI | FINLAND

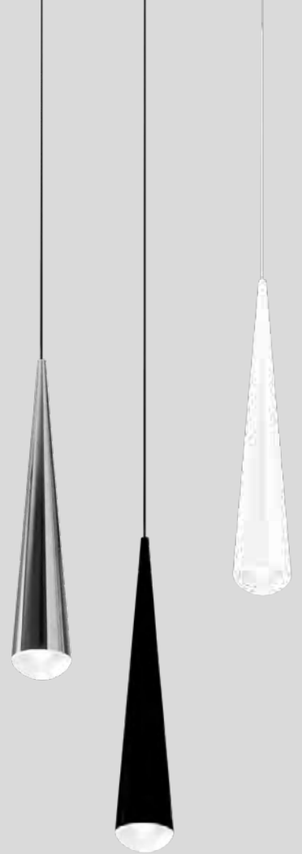

back

CONE

CEILING SUSPENDED



1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
chrome plated | glass

0.55kg IP20 0,3+D G 36°

2700K | >90 CRI | 480lm

	CODE
	200184W2
	200184C2
	200184B2

PRIVATE RESIDENCE | ADINS VAN LOOVEREN BELGIUM

BISHOP

CEILING SUSPENDED

reddot award 2015
honourable mention



4.0

E27 max. 25W | 220-240VAC
50-60Hz | composite | wet painted

1.08kg IP20 S=0,3=D

shade only

	CODE
	218100W0
	218100D0
	218100K0

OPTIONAL

A60 LED E27 6W | phase-cut dim

	CODE
2200K | 315lm	9003E109
2700K | 500lm	9003E138

G95 LED E27 6W | phase-cut dim

2200K | 450lm	9003E111

G95 LED E27 12W opal | phase-cut dim

2700K | 1000lm	9003E154

more lamps and specs on page 730



6.0

E27 max. 25W | 220-240VAC
50-60Hz | composite | wet painted

2.62kg IP20 S=0,3=D

shade only

	CODE
	218200W0
	218200D0
	218200K0

OPTIONAL

A60 LED E27 6W | phase-cut dim

	CODE
2200K | 315lm	9003E109
2700K | 500lm	9003E138

G95 LED E27 6W | phase-cut dim

2200K | 450lm	9003E111

G95 LED E27 12W opal | phase-cut dim

2700K | 1000lm	9003E154

more lamps and specs on page 730



8.0

E27 max. 25W | 220-240VAC
50-60Hz | composite | wet painted

5.70kg IP20 S=0,3=D

shade only

	CODE
	218300W0
	218300D0
	218300K0

OPTIONAL

A60 LED E27 6W | phase-cut dim

	CODE
2200K | 315lm	9003E109
2700K | 500lm	9003E138

G95 LED E27 6W | phase-cut dim

2200K | 450lm	9003E111

G95 LED E27 12W opal | phase-cut dim

2700K | 1000lm	9003E154

more lamps and specs on page 730

ALWAYS USE

4.0 | 6.0

cable suspension set | 2.0m cable

	CODE
	90015120
	90015138
	90015134
	90015119

8.0

cable suspension set | 2.0m cable

	CODE
	90015123
	90015139
	90015135
	90015122

6.0m suspension set on page 740

SCHLOSSKELLER | PLANCONSORT ZT GMBH SEGGAUBERG | AUSTRIA

PRIVATE RESIDENCE | 3ARCHITECTEN BELGIUM

ELLO

CEILING SUSPENDED

p. 401

reddot award 2015
winner



13.0

LED 18W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS
aluminium powder coated
opal PMMA cover

2.00kg IP20

phase-cut dim | 3000K | >90 CRI | 1090lm

	CODE
	500284W5
	500284B5

chrome endcap

back

PRIVATE RESIDENCE | ISABEL GOMEZ INTERIORS BELGIUM

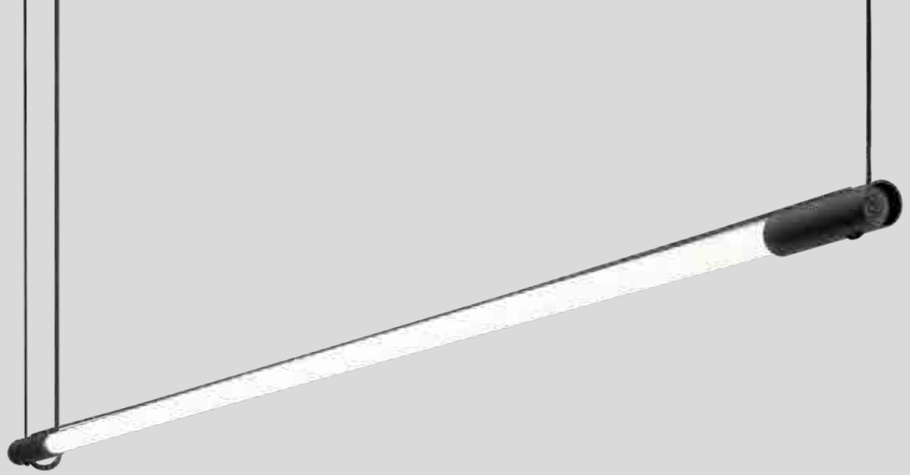

DARF

CEILING SUSPENDED

p. 583

ARCHITECT
PHILIPP WEINBERGER &
STUDIO MARCH GUT



1.0

LED 22W | 220-240VAC
50-60Hz | aluminium powder
coated | black textile cable

0.42kg IP20

non dim

	CODE
	2561T7B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K | 22W	3300	>80	4
4000K | 22W	3700	>80	6

phase-cut dim

	CODE
	2561T8B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K | 22W	1920	>90	3
3000K | 22W	2095	>90	5

phase-cut dim

non-dim

light distribution

back

MARREYT
MARREYT

MARREYT

GREENHOUSE ANTWERP | INTERVEST OFFICES & WAREHOUSES ANTWERPEN | BELGIUM

VENN

CEILING SUSPENDED

p. 327 p. 579

DESIGNED BY
S&R CORNELISSEN

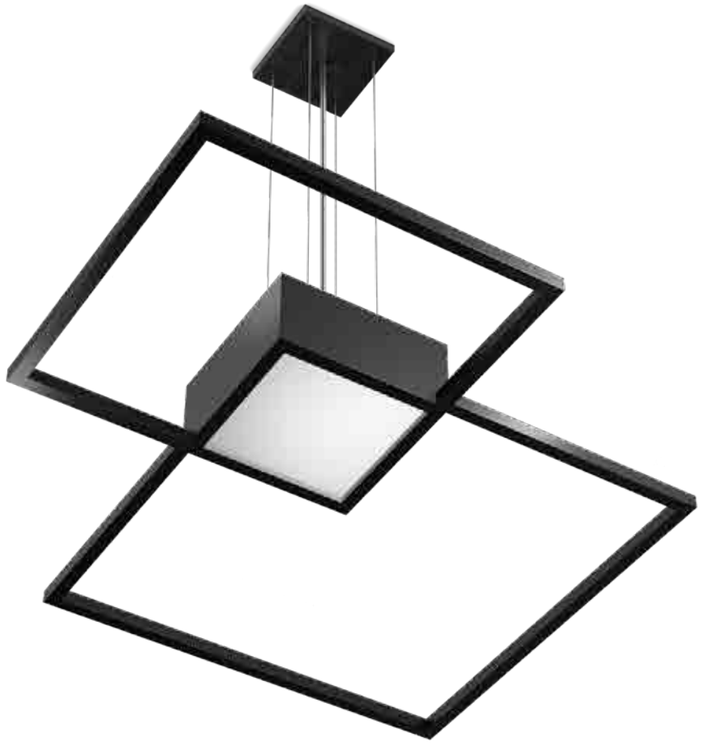



3.0

LED 47W | 220-240VAC
50-60Hz | PCB 3-step | incl. PS
aluminium powder coated
opal PMMA cover | direct/indirect

2.90kg IP20

phase-cut dim

	CODE
	149384W_
	149384Q_
	149384B_

DALI dim

	CODE
	149385W_
	149385Q_
	149385B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	540/2950 | >80	2
3000K	580/3140 | >80	4

back

OFFICE ZUIDERPOORT GENT | BELGIUM

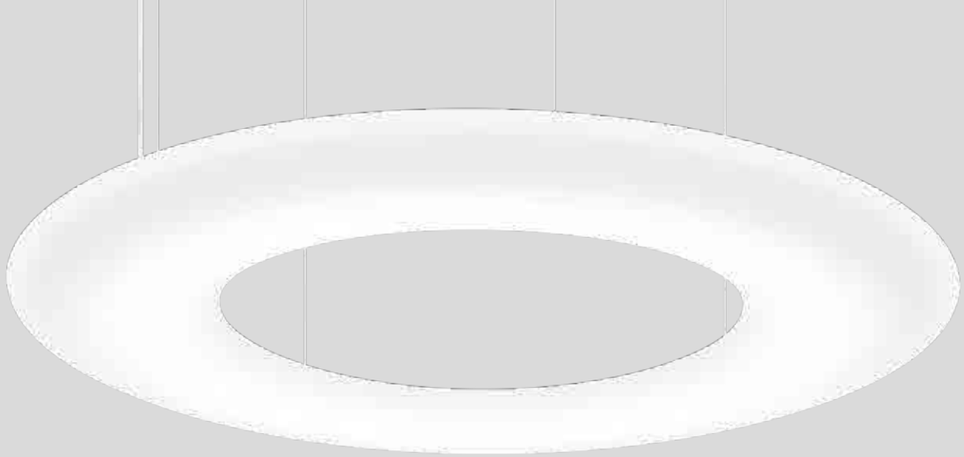

GIGANT

CEILING SUSPENDED

DESIGNED BY
S&R CORNELISSEN





10.0

LED 42W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | DALI switch dim | opal LLDPE body | steel

8.80kg IP20

	CODE
	213185W_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	5300	>80	4
4000K	5600	>80	6

OPTIONAL

	CODE
suspension set 4.0m	90015114

the used material applies to UL 94 HB standard and glow wire test 630°
longer suspension on request

16.0

LED 84W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | DALI switch dim | opal LLDPE body | steel

15.30kg IP20

	CODE
	213285W_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	10600	>80	4
4000K	11300	>80	6

OPTIONAL

	CODE
suspension set 4.0m	90015114

the used material applies to UL 94 HB standard and glow wire test 630°
longer suspension on request

back

OFFICE EDGAR & COOPER | BUREAU GODDEERIS ARCHITECTEN KORTRIJK | BELGIUM

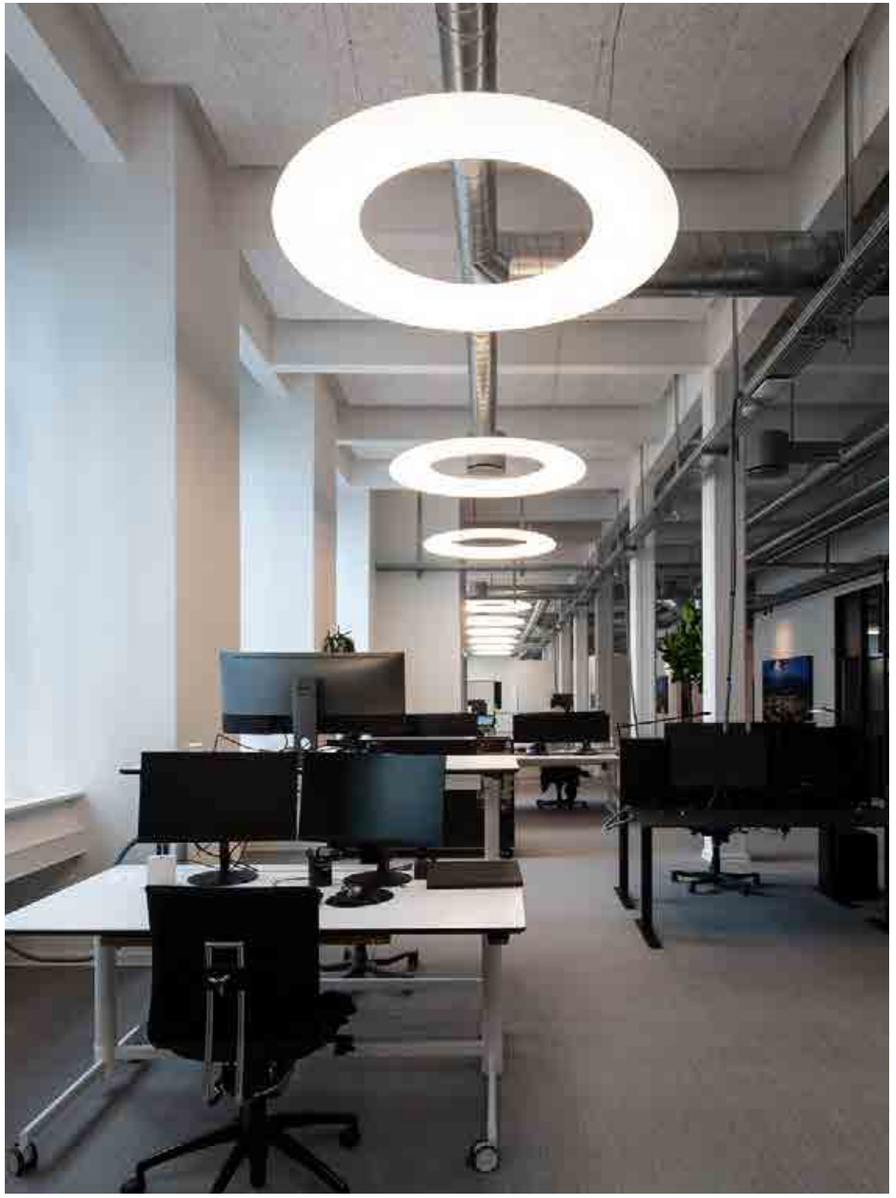

COLLIERS INTERNATIONAL | ARCHITECT ~~HELLE NØHR~~ back | ANKER & CO KOPENHAGEN | DENMARK

OFFICE MICROSOFT | CONCEPT & DESIGN: PROCOS GROUP BRUSSELS | BELGIUM

CYCLONE

CEILING SUSPENDED

DESIGNED BY
S&R CORNELISSEN

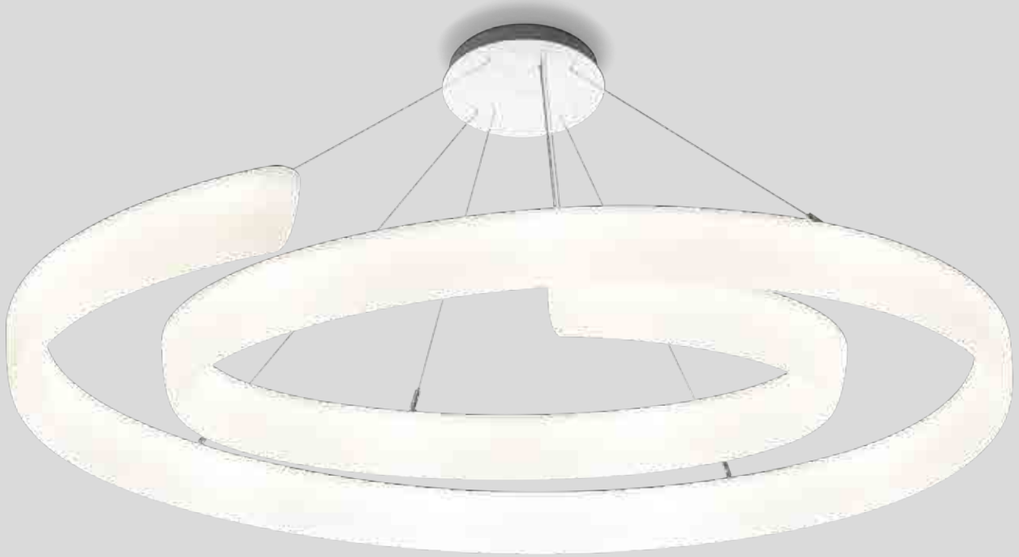



17.0

LED 68W | 220-240VAC
50-60Hz | PCB 3-step | incl. PS
DALI | aluminium powder coated
opal LLDPE body

8.80kg IP20

3000K | >80 CRI | 8930lm

CODE

219185W4

the used material applies to UL 94 HB
standard and glow wire test 630°

Rev. 001/2021-06

back

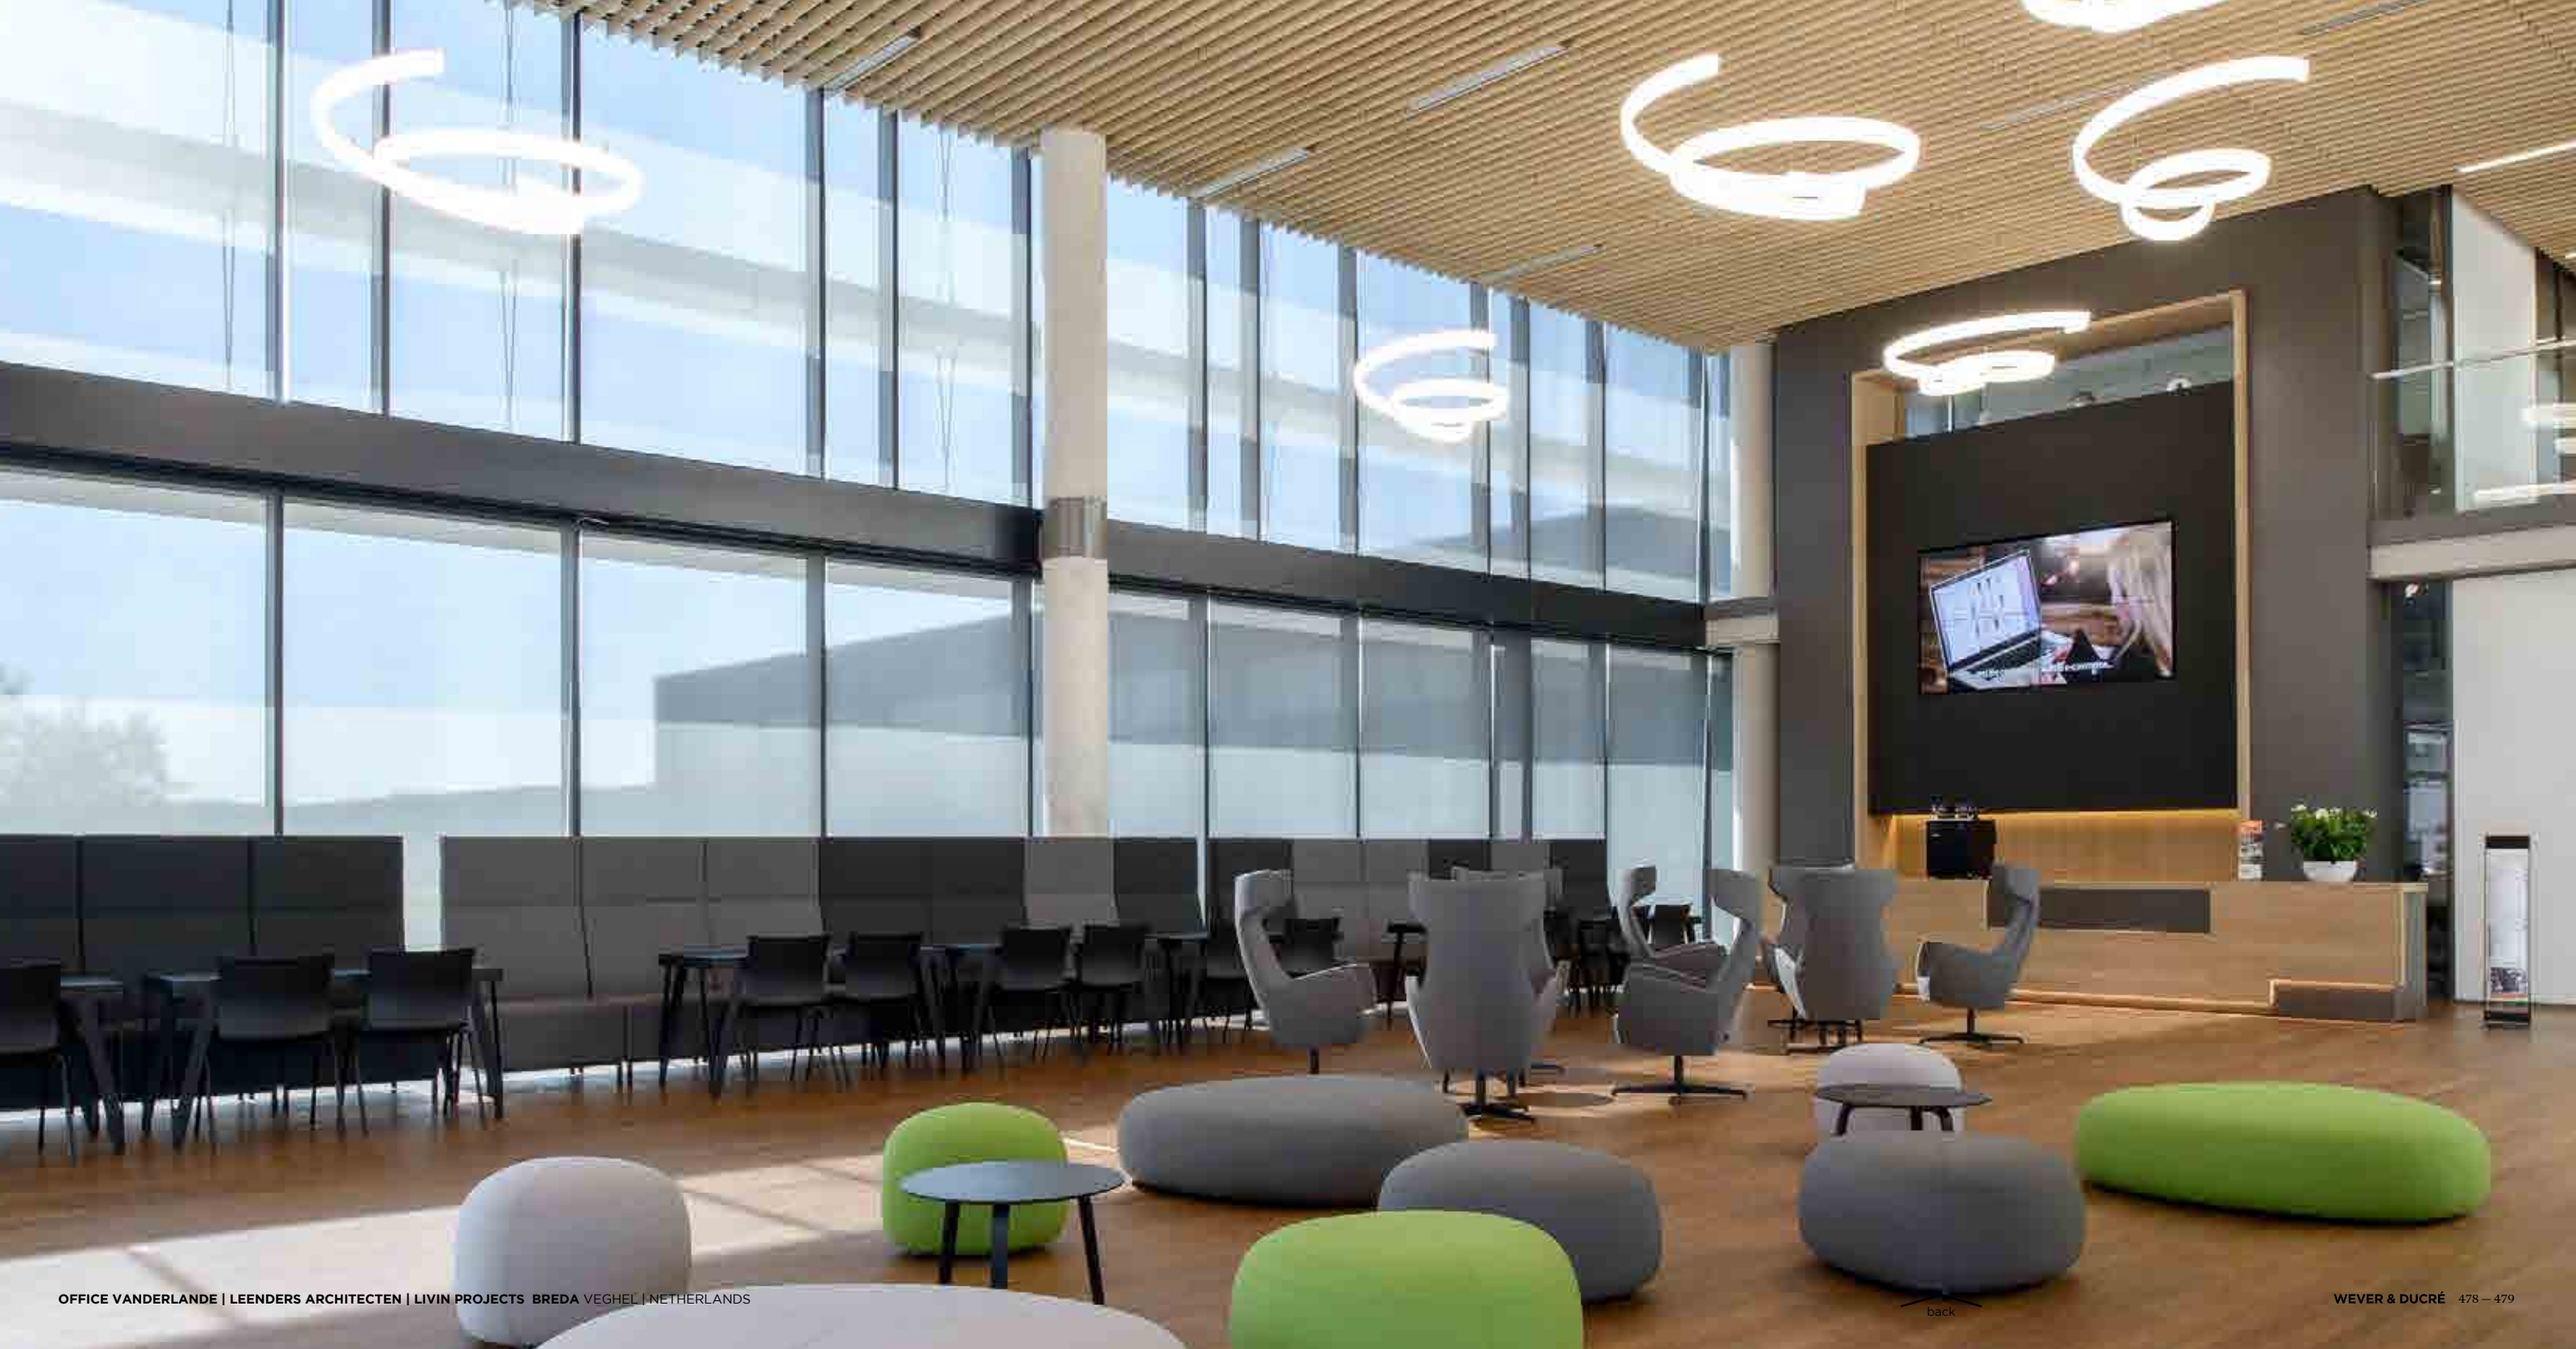

OFFICE VANDERLANDE | LEENDERS ARCHITECTEN | LIVIN PROJECTS BREDA VEGHEL | NETHERLANDS

back

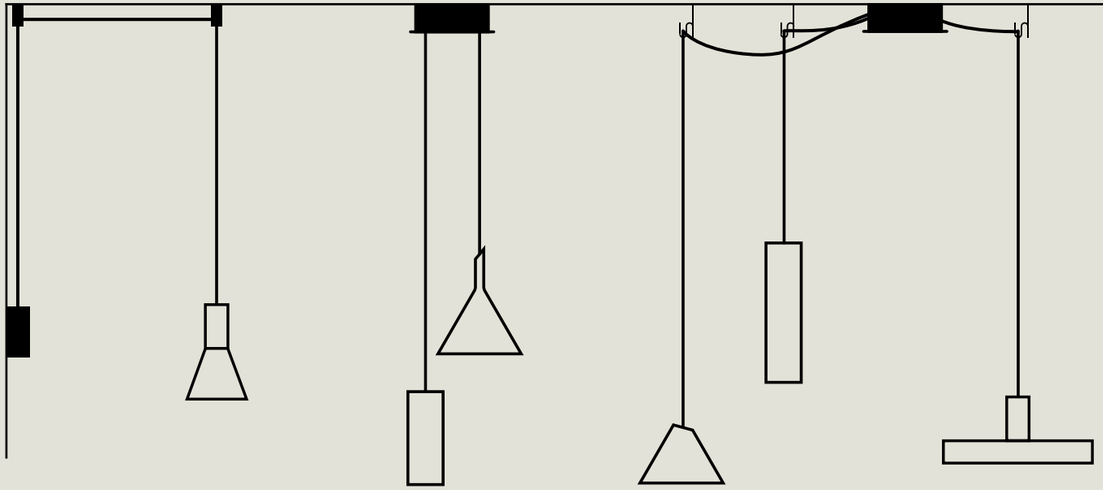

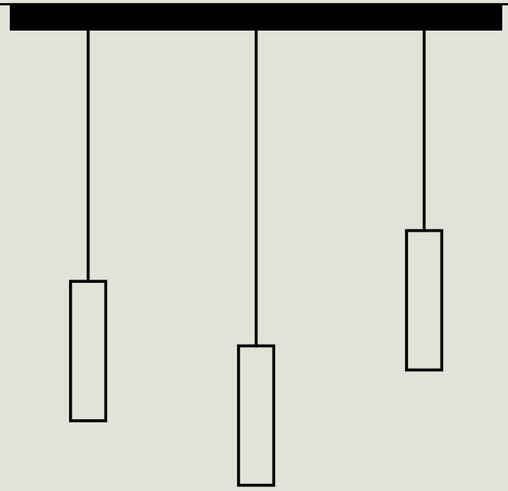

MULTI SUSPENSION OPTIONS

FOR UP TO 8 LUMINAIRES

LET'S HANG OUT TOGETHER

RAY likes swinging from the ceiling alongside other Wever & Ducré luminaires. The trick is suspending up to eight luminaires as a round, multi-ceiling rose and up to five in a straight form. All you need is a single light outlet from which you can tailor the arrangement. Whether it's straight as a die or in the form of a spider's web where the cables become a design element. Who can join the team? Besides WETRO and DOCUS, BOX, HEXO, ODREY and SHIEK are also absolute combination geniuses.

RAY schwingt am liebsten gemeinsam mit anderen Wever & Ducré-Leuchten von der Decke. Der Trick: Bis zu acht Leuchten lassen sich als Multibaldachin in runder und bis zu fünf in gerader Form abhängen. Und das von einem einzigen Lichtauslass aus, über dem man sie individuell arrangieren kann. Schnurgerade oder in Spinnennetzform, bei der die Kabel zum Design-Element werden. Wer ins Team passt? Neben WETRO und DOCUS sind auch BOX, HEXO, ODREY oder SHIEK absolute Kombinationsgenies.

ODREY MULTI	p. 485
RAY MULTI	p. 487
BOX MULTI	p. 489
DOCUS MULTI	p. 491
HEXO MULTI	p. 493
WETRO MULTI	p. 495
SHIEK MULTI	p. 497

single suspension options on page 422

1
LUMINAIRE



WALL BASE ROUND
wall base round for 1 luminaire
incl. switch on/off
incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196

2-8
LUMINAIRES



CEILING BASE ROUND
standard up to 4 luminaires
add 90059118 for 5-8 luminaires

	CODE
	90052005
	90052006

more specs on page 742

2
LUMINAIRES



CEILING BASE
600mm

	CODE
	90052007
	90052008

3
LUMINAIRES



CEILING BASE
900mm

	CODE
	90052009
	90052010

4
LUMINAIRES



CEILING BASE
1200mm

	CODE
	90052011
	90052012

5
LUMINAIRES



CEILING BASE
1500mm

	CODE
	90052013
	90052014

back

PRIVATE RESIDENCE SPAIN

WALL BASE ROUND

WALL SURFACE



WALL BASE ROUND

wall base round for 1 luminaire
incl. switch on/off
incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196

OPTIONAL

Cable wall - ceiling bracket
for cable 4.25-5.5mm diameter

	CODE
	90019197
	90019198

more specs on page 742

back

PRIVATE RESIDENCE GERMANY

ODREY multi

CEILING SUSPENDED



inner cover 1.0

OPTIONAL

inner cover 1.0

	CODE
	911420G0
	911420B0

suitable for shades 6.0 | 7.0 | 8.0

1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted | incl. 1x strain relief and hook

0.30kg IP20

	CODE
	257520G0
	257520B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K	901228B3
3000K	901228B5

more lamps and specs on page 729

ALWAYS USE

shade 1.0 - 8.0 in gold

	CODE
1.0	911421G1
2.0	91140GG0
2.0	91140GB0
3.0	911423G1
4.0	911424G1
5.0	911425G1
6.0	911426G1
7.0	911427G1
8.0	911428G1

shade 1.0 - 8.0 in black

	CODE
1.0	911421B1
2.0	91140BB0
2.0	91140BG0
3.0	911423B1
4.0	911424B1
5.0	911425B1
6.0	911426B1
7.0	911427B1
8.0	911428B1

ALWAYS USE

single suspension wall base round

	CODE
	90019195
	90019196

multiple suspension ceiling base round for up to 8 lamps

	CODE
	90052005
	90052006

extra set standard connectors for 5 to 8 lamps

CODE
90059118

multiple suspension ceiling base long 600mm | 2 lamps

	CODE
	90052007
	90052008

900mm | 3 lamps

	CODE
	90052009
	90052010

1200mm | 4 lamps

	CODE
	90052011
	90052012

1500mm | 5 lamps

	CODE
	90052013
	90052014

more information on page 742

back

SCHLOSSKELLER | PLANCONSORT ZT GMBH SEGGAUBERG | AUSTRIA

RAY multi

CEILING SUSPENDED



2.0 | 3.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated brushed
incl. 1x strain relief and hook

0.62kg IP20 IK03 P 36°

2.0

200mm	CODE
	227764W_
	227764L_
	227764G_
	227764P_
	227764B_

3.0

300mm	CODE
	227864W_
	227864L_
	227864G_
	227864P_
	227864B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	420 | >90	3
3000K	440 | >90	5
1800-2850K	360 | >95	9



2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated brushed
incl. 1x strain relief and hook

0.54kg IP20 IK03

2.0

200mm	CODE
	227720W0
	227720L0
	227720G0
	227720P0
	227720B0

3.0

300mm	CODE
	227820W0
	227820L0
	227820G0
	227820P0
	227820B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

ALWAYS USE

single suspension wall base round

	CODE
	90019195
	90019196

multiple suspension ceiling base
round for up to 8 lamps

	CODE
	90052005
	90052006

extra set standard connectors for
5 to 8 lamps

CODE
90059118

multiple suspension ceiling base long
600mm | 2 lamps

	CODE
	90052007
	90052008

900mm | 3 lamps

	CODE
	90052009
	90052010

1200mm | 4 lamps

	CODE
	90052011
	90052012

1500mm | 5 lamps

	CODE
	90052013
	90052014

more information on page 742

white luminaires come with a white
cable; other colours are standard with
black cable

alternative colour combinations on
request

back

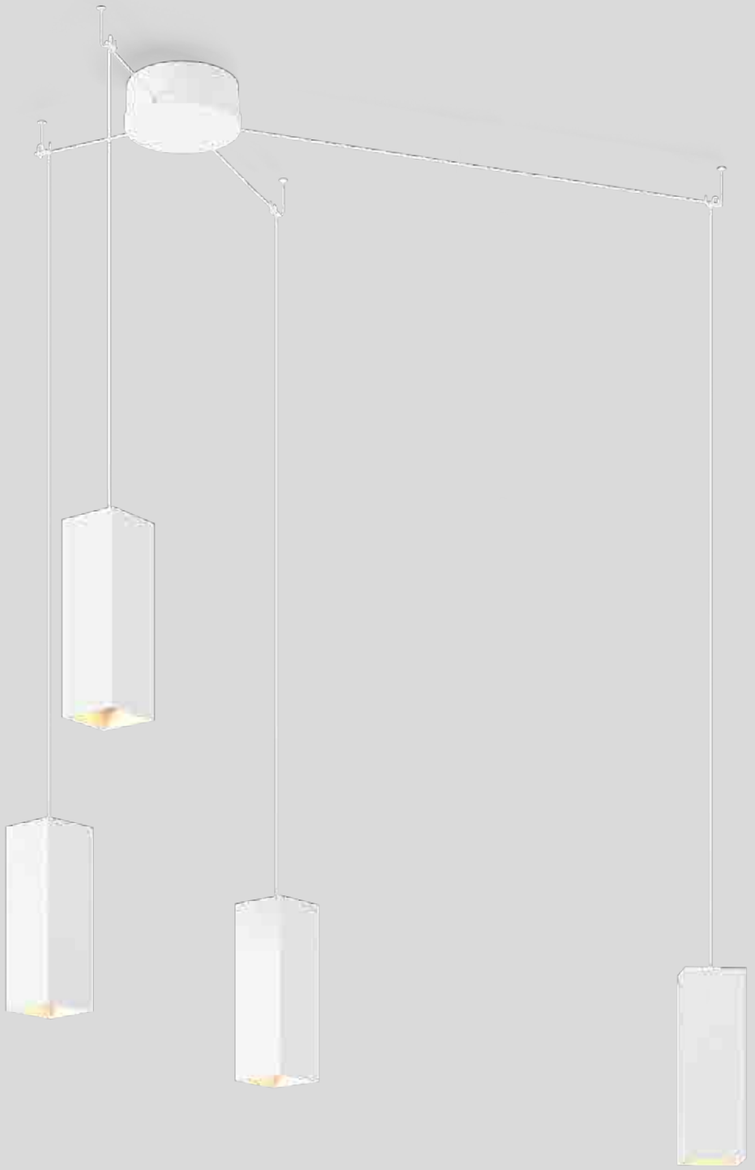

BOX multi

CEILING SUSPENDED



2.0 | 3.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated brushed
incl. 1x strain relief and hook

0.69kg IP20 0,3 P 36°

2.0

200mm	CODE
	227164W_
	227164L_
	227164P_
	227164B_

3.0

300mm	CODE
	227264W_
	227264L_
	227264P_
	227264B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	420 | >90	3
3000K	440 | >90	5
1800-2850K	360 | >95	9



2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated brushed
incl. 1x strain relief and hook

0.62kg IP20 0,3

2.0

200mm	CODE
	227120W0
	227120L0
	227120P0
	227120B0

3.0

300mm	CODE
	227220W0
	227220L0
	227220P0
	227220B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

ALWAYS USE

single suspension wall base round

	CODE
	90019195
	90019196

multiple suspension ceiling base
round for up to 8 lamps

	CODE
	90052005
	90052006

extra set standard connectors for
5 to 8 lamps

	CODE
	90059118

multiple suspension ceiling base long
600mm | 2 lamps

	CODE
	90052007
	90052008

900mm | 3 lamps

	CODE
	90052009
	90052010

1200mm | 4 lamps

	CODE
	90052011
	90052012

1500mm | 5 lamps

	CODE
	90052013
	90052014

more information on page 742

white luminaires come with a white
cable; other colours are standard with
black cable

alternative colour combinations on
request

back

DOCUS multi

CEILING SUSPENDED

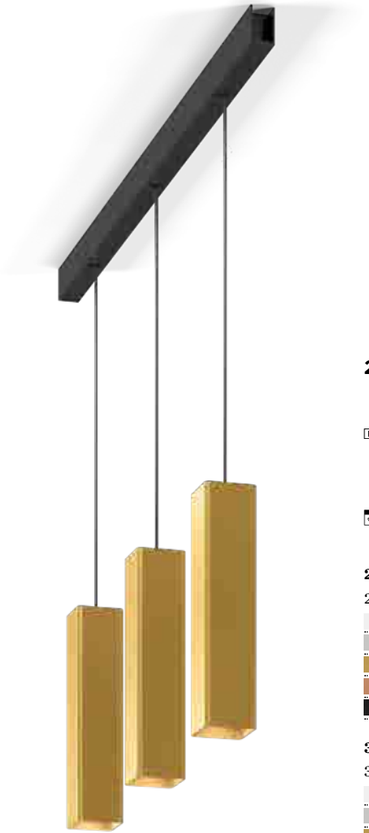



2.0 | 3.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated brushed
incl. 1x strain relief and hook

0.69kg IP20 3-step PS 36°

2.0

200mm	CODE
	227564W_
	227564L_
	227564G_
	227564P_
	227564B_

3.0

300mm	CODE
	227664W_
	227664L_
	227664G_
	227664P_
	227664B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	420 | >90	3
3000K	440 | >90	5
1800-2850K	360 | >95	9



2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated brushed
incl. 1x strain relief and hook

0.62kg IP20 3-step

2.0

200mm	CODE
	227520W0
	227520L0
	227520G0
	227520P0
	227520B0

3.0

300mm	CODE
	227620W0
	227620L0
	227620G0
	227620P0
	227620B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

ALWAYS USE

single suspension wall base round

	CODE
	90019195
	90019196

multiple suspension ceiling base
round for up to 8 lamps

	CODE
	90052005
	90052006

extra set standard connectors for
5 to 8 lamps

CODE
90059118

multiple suspension ceiling base long
600mm | 2 lamps

	CODE
	90052007
	90052008

900mm | 3 lamps

	CODE
	90052009
	90052010

1200mm | 4 lamps

	CODE
	90052011
	90052012

1500mm | 5 lamps

	CODE
	90052013
	90052014

more information on page 742

white luminaires come with a white
cable; other colours are standard with
black cable

alternative colour combinations on
request

back

SHOWROOM | GRANDO KEUKENS BRUGGE | BELGIUM

HEXO multi

CEILING SUSPENDED

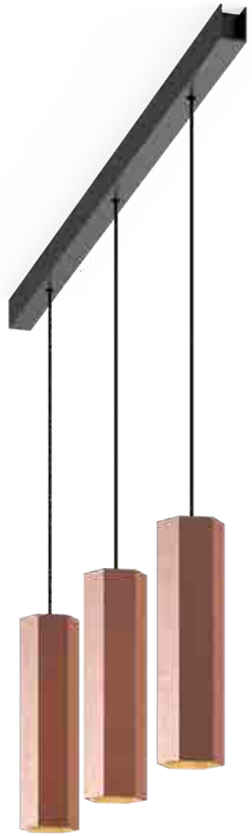



2.0 | 3.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated brushed
incl. 1x strain relief and hook

0.66kg IP20 3-step P 36°

2.0

200mm	CODE
	227364G_
	227364Q_
	227364P_
	227364B_

3.0

300mm	CODE
	227464G_
	227464Q_
	227464P_
	227464B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	420 | >90	3
3000K	440 | >90	5
1800-2850K	360 | >95	9



2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated brushed
incl. 1x strain relief and hook

0.58kg IP20 3-step

2.0

200mm	CODE
	227320G0
	227320Q0
	227320P0
	227320B0

3.0

300mm	CODE
	227420G0
	227420Q0
	227420P0
	227420B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

ALWAYS USE

single suspension wall base round

	CODE
	90019195
	90019196

multiple suspension ceiling base
round for up to 8 lamps

	CODE
	90052005
	90052006

extra set standard connectors for
5 to 8 lamps

CODE
90059118

multiple suspension ceiling base long
600mm | 2 lamps

	CODE
	90052007
	90052008

900mm | 3 lamps

	CODE
	90052009
	90052010

1200mm | 4 lamps

	CODE
	90052011
	90052012

1500mm | 5 lamps

	CODE
	90052013
	90052014

more information on page 742

all luminaires come with a black cable;
white cable possible on request

back

B&B DE KOOLPUTTEN | GMF ARCHITECTEN WAASMUNSTER | BELGIUM

WETRO multi

CEILING SUSPENDED



1.0

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
artisanal hand blown glass
incl. 1x strain relief and hook

0.56 kg IP20

1800-2850K | >90 CRI | 340lm

	CODE
	236189P9
	236189B9
	236189TD9
	236189TS9
	236189TW9



2.0

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
artisanal hand blown glass
incl. 1x strain relief and hook

0.97 kg IP20

1800-2850K | >90 CRI | 340lm

	CODE
	236289P9
	236289B9
	236289TD9
	236289TS9
	236289TW9



3.0

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
artisanal hand blown glass
incl. 1x strain relief and hook

1.69 kg IP20

1800-2850K | >90 CRI | 340lm

	CODE
	236389P9
	236389B9
	236389TD9
	236389TS9
	236389TW9

ALWAYS USE

single suspension wall base round

	CODE
	90019195
	90019196

multiple suspension ceiling base round for up to 8 lamps

	CODE
	90052005
	90052006

extra set standard connectors for 5 to 8 lamps

CODE
90059118

multiple suspension ceiling base long
600mm | 2 lamps | only for 1.0

	CODE
	90052007
	90052008

900mm | 3 lamps | only for 1.0

	CODE
	90052009
	90052010

1200mm | 4 lamps | only for 1.0

	CODE
	90052011
	90052012

1500mm | 5 lamps | only for 1.0

	CODE
	90052013
	90052014

more information on page 742

all luminaires come with a black cable; white cable possible on request

back

SHIEK multi

CEILING SUSPENDED

DESIGNED BY
3H DRAFT

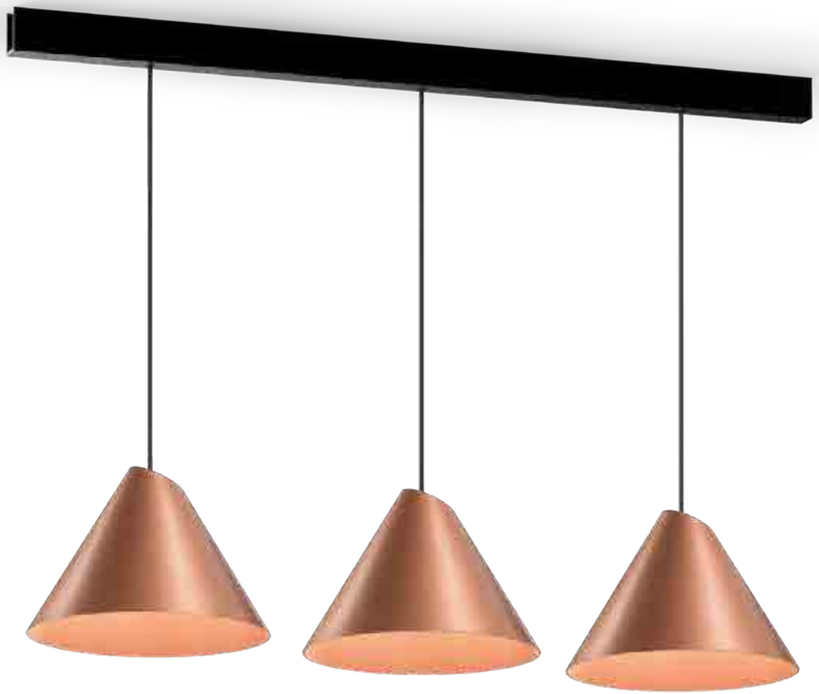



1.0 LED

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
lacquered | incl. 1x strain relief
and hook

0.36 kg IP20

1800-2850K | >90 CRI | 510lm

CODE
237189W9
237189J9
237189P9
237189K9
237189Z9



2.0 LED

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
lacquered | incl. 1x strain relief
and hook

0.47 kg IP20

1800-2850K | >90 CRI | 510lm

CODE
237289W9
237289J9
237289P9
237289K9
237289Z9



3.0 LED

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
lacquered | incl. 1x strain relief
and hook

0.60 kg IP20

1800-2850K | >90 CRI | 510lm

CODE
237389W9
237389J9
237389P9
237389K9
237389Z9



3.0 E27

E27 max. 20W | A60 | 100-240VAC
50-60Hz | aluminium powder
coated | lacquered | incl. 1x strain
relief and hook

0.6kg IP20

CODE
2343E8W0
2343E8J0
2343E8P0
2343E8K0
2343E8Z0

ALWAYS USE

multiple suspension ceiling base
round for up to 8 lamps

CODE
90052005
90052006

extra set standard connectors for
5 to 8 lamps

CODE
90059118

multiple suspension ceiling base long
600mm | 2 lamps | only for 1.0

CODE
90052007
90052008

900mm | 3 lamps | only for 1.0

CODE
90052009
90052010

1200mm | 4 lamps | only for 1.0

CODE
90052011
90052012

1500mm | 5 lamps | only for 1.0

CODE
90052013
90052014

more information on page 742

all luminaires come with a black cable;
white cable possible on request

back

PRIVATE RESIDENCE OBUMEX - STEENOVEN BELGIUM

SHIEK multi

CEILING SUSPENDED

DESIGNED BY
3H DRAFT

4.0 LED

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium | powder coated
lacquered | incl. 1x strain relief
and hook

0.70 kg | IP20

1800-2850K | >90 CRI | 510lm

	CODE
	237489W9
	237489J9
	237489P9
	237489K9
	237489Z9



5.0 LED

LED 11W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium | powder coated
lacquered | incl. 1x strain relief
and hook

0.80 kg | IP20

1800-2850K | >90 CRI | 510lm

	CODE
	237589W9
	237589J9
	237589P9
	237589K9
	237589Z9



4.0 E27

E27 max. 20W | A60 | 100-240VAC
50-60Hz | aluminium powder
coated | lacquered | incl. 1x strain
relief and hook

0.70 kg | IP20

	CODE
	2344E8W0
	2344E8J0
	2344E8P0
	2344E8K0
	2344E8Z0

5.0 E27

E27 max. 20W | A60 | 100-240VAC
50-60Hz | aluminium powder
coated | lacquered | incl. 1x strain
relief and hook

0.80 kg | IP20

	CODE
	2345E8W0
	2345E8J0
	2345E8P0
	2345E8K0
	2345E8Z0

ALWAYS USE

multiple suspension ceiling base
round for up to 8 lamps

	CODE
	90052005
	90052006

extra set standard connectors for
5 to 8 lamps

CODE
90059118

more information on page 742

all luminaires come with a black cable;
white cable possible on request

back

WALL RECESSED

p. 501 — 513

WALL RECESSED

SMILE IN 1.0
p. 503

SMILE IN 2.0
p. 503

LITO 1.0
p. 505

LITO 2.0
p. 505

STRIPE
p. 507

STRANGE
p. 509

THEMIS
p. 511

ORIS
p. 513

PRIVATE RESIDENCE | COBRAS BELGIUM

SMILE IN

WALL RECESSED

p. 621





1.0

LED 4/6W | 350/500mA | 9Vf
COB 3-step | excl. power supply
aluminium powder coated
brushed

0.39kg IP20

86-88 40 min 13

3000K | >80 CRI | 230/320lm

	CODE
	326151W4
	702151L4

ALWAYS USE

power supply

	CODE
350mA | 6W	90213202
500mA | 6W	90214201

more power supplies on page 723

OPTIONAL

	CODE
recessed ring	90012030

2.0

LED 4/6W | 350/500mA | 9Vf
COB 3-step | excl. power supply
aluminium powder coated
brushed

0.42kg IP20

86-88 40 min 13

3000K | >80 CRI | 230/320lm

	CODE
	326251W4
	703151L4

ALWAYS USE

power supply

	CODE
350mA | 6W	90213202
500mA | 6W	90214201

more power supplies on page 723

OPTIONAL

	CODE
recessed ring	90012030

back

PRIVATE RESIDENCE | BAUBUREAU OG 27 AG SWITZERLAND

LITO

WALL RECESSED



1.0

LED 2/3W | 350/500mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated
anodised

0.09kg IP20 0,3 P

70x70 35 12-18

3000K | >80 CRI | 145/200lm

	CODE
	145181W4
	145181A4
	145181B4

ALWAYS USE

power supply

	CODE
350mA | 6W	90213202
500mA | 6W	90214201

more power supplies on page 723

OPTIONAL

	CODE
recessed housing	90012027
plasterkit	90017119

recessed housing | always use in combination with plasterkit



2.0

LED 2/3W | 350/500mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated
anodised

0.09kg IP20 0,3 P

70x70 35 12-18

3000K | >80 CRI | 75/100lm

	CODE
	145281W4
	145281A4
	145281B4

ALWAYS USE

power supply

	CODE
350mA | 6W	90213202
500mA | 6W	90214201

more power supplies on page 723

OPTIONAL

	CODE
recessed housing	90012027
plasterkit	90017119

recessed housing | always use in combination with plasterkit

back

PRIVATE RESIDENCE | KILLIAN GARTNER | ROOMS ATELIER AUSTRIA

STRIPE

WALL RECESSED







0.4

LED 1/2W | 350/700mA | 3Vf
PCB 3-step | excl. power supply
aluminium powder coated
brushed

0.09kg IP20 0,3÷ TG

25x56 40 8-18

3000K | >80 CRI | 11/20lm

	CODE
	305151W4
	305151L4
	305151G4
	305151B4

ALWAYS USE

power supply

	CODE
350mA | 6W	90213202
700mA | 6W	90215203

more power supplies on page 723

OPTIONAL

	CODE
recessed housing incl. plasterkit	90012037

0.7

LED 1/2W | 350/700mA | 3Vf
PCB 3-step | excl. power supply
aluminium powder coated
brushed

0.10kg IP20 0,3÷ TG

25x56 40 8-18

3000K | >80 CRI | 11/20lm

	CODE
	305251W4
	305251L4
	305251G4
	305251B4

ALWAYS USE

power supply

	CODE
350mA | 6W	90213202
700mA | 6W	90215203

more power supplies on page 723

OPTIONAL

	CODE
recessed housing incl. plasterkit	90012037

2.2

LED 1/2W | 350/700mA | 3Vf
PCB 3-step | excl. power supply
aluminium powder coated
brushed

0.27kg IP20 0,3÷ TG

25x170 40 8-18

3000K | >80 CRI | 17/27lm

	CODE
	305351W4
	305351L4
	305351G4
	305351B4

ALWAYS USE

power supply

	CODE
350mA | 6W	90213202
700mA | 6W	90215203

more power supplies on page 723

OPTIONAL

	CODE
recessed housing incl. plasterkit	90012038

PRIVATE RESIDENCE | VIVERE LICHT ROBERT STEINBÖCK AUSTRIA

STRANGE

WALL RECESSED



1.7

LED 4/5W | 500/700mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated
lacquered | incl. plasterkit

0.24kg IP20 0,3 T6

170x86 55 2-25

	CODE
	320271W_
	320271S_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	150/190	>80	2
3000K	165/210	>80	4



2.7

LED 4/5W | 500/700mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated
lacquered | incl. plasterkit

0.31kg IP20 0,3 T6

270x86 55 2-25

	CODE
	320371W_
	320371S_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	150/190	>80	2
3000K	165/210	>80	4



5.0

LED 4/5W | 500/700mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated
lacquered | incl. plasterkit

0.45kg IP20 0,3 T6

470x86 55 2-25

	CODE
	320671W_
	320671S_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	150/190	>80	2
3000K	165/210	>80	4

ALWAYS USE

power supply

	CODE
500mA | 6W	90214201
700mA | 6W	90215203

more power supplies on page 724

ALWAYS USE

power supply

	CODE
500mA | 6W	90214201
700mA | 6W	90215203

more power supplies on page 724

ALWAYS USE

power supply

	CODE
500mA | 6W	90214201
700mA | 6W	90215203

more power supplies on page 724

back

THEMIS

WALL RECESSED



1.7

LED 4/5W | 500/700mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated
lacquered

0.24kg IP20 1-0,3-10 IP6

70x158 50 2-18

	CODE
	323271W_
	323271X_
	323271S_
	323271K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	150/190	>80	2
3000K	165/210	>80	4

ALWAYS USE

power supply

	CODE
500mA | 6W	90214201
700mA | 6W	90215203

more power supplies on page 724

OPTIONAL

recessed housing and plasterkit
on page 733 and 736



2.7

LED 4/5W | 500/700mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated
lacquered

0.31kg IP20 1-0,3-10 IP6

70x258 50 2-18

	CODE
	323371W_
	323371X_
	323371S_
	323371K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	150/190	>80	2
3000K	165/210	>80	4

ALWAYS USE

power supply

	CODE
500mA | 6W	90214201
700mA | 6W	90215203

more power supplies on page 724

OPTIONAL

recessed housing and plasterkit
on page 733 and 736



5.0

LED 4/5W | 500/700mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated
lacquered

0.45kg IP20 1-0,3-10 IP6

70x458 50 2-18

	CODE
	323671W_
	323671X_
	323671S_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	150/190	>80	2
3000K	165/210	>80	4

ALWAYS USE

power supply

	CODE
500mA | 6W	90214201
700mA | 6W	90215203

more power supplies on page 724

OPTIONAL

recessed housing and plasterkit
on page 733 and 736

SHOWROOM | GRANDO KEUKENS BRUGGE | BELGIUM

back

PRIVATE RESIDENCE | SALENS ARCHITECTEN | EVA CARLIER INTERIOR DESIGN BELGIUM

ORIS

WALL RECESSED

p. 623



0.7

LED 1/2W | 350/700mA | 3Vf
PCB 3-step | excl. power supply
aluminium powder coated

0.28kg | IP20 | ~0,3~ | G

47x182 | 40 | 12-40

3000K | >80 CRI | 90/150lm

	CODE
	327161W4
	327161B4

ALWAYS USE

power supply

	CODE
350mA | 6W	90213202
500mA | 6W	90214201
700mA | 6W	90215203

more power supplies on page 723

OPTIONAL

	CODE
recessed housing incl. plasterkit	90012039
concrete housing	90012044



1.3

LED 2/4W | 350/700mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated

0.34kg | IP20 | ~0,3~ | G

115x117 | 40 | 12-40

3000K | >80 CRI | 180/300lm

	CODE
	327261W4
	327261B4

ALWAYS USE

power supply

	CODE
350mA | 6W	90213202
500mA | 6W	90214201
700mA | 6W	90215203

more power supplies on page 723

OPTIONAL

	CODE
recessed housing incl. plasterkit	90012041
concrete housing	90012040



2.0

LED 2/4W | 350/700mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated

0.42kg | IP20 | ~0,3~ | G

115x185 | 40 | 12-40

3000K | >80 CRI | 180/300lm

	CODE
	327361W4
	327361B4

ALWAYS USE

power supply

	CODE
350mA | 6W	90213202
500mA | 6W	90214201
700mA | 6W	90215203

more power supplies on page 723

OPTIONAL

	CODE
recessed housing incl. plasterkit	90012043
concrete housing	90012042

WALL SURFACE

p. 515 — 587

WALL SURFACE SPOTLIGHTS

ODREY 1.0
p. 519

ODREY 2.0
p. 521

RAY MINI
p. 525

RAY
p. 527

BOX MINI
p. 533

BOX
p. 535

DOCUS MINI
p. 541

HEXO MINI
p. 543

TRAIN
p. 545

CENTRAL
p. 547

STATION
p. 549

SARA SNOOZE
p. 551

MICK SNOOZE
p. 555

MICK WALL 1.0
p. 557

WALL SURFACE LUMINAIRES

LEENS
p. 559

BENTO
p. 561

SCAVA
p. 563

FINLIN 1.0
p. 565

FINLIN 4.0
p. 565

CLEA
p. 569

CLOCK
p. 571

MILES ROUND
p. 573

MILES CARRÉ
p. 575

MILES 9.0
p. 577

VENN
p. 579

DARF
p. 583

WALL SURFACE IP-RATED

MIRBA IP44
p. 585

MIRBI LONG IP44
p. 587

DESIGNER FAMILIES

ROOMOR
p. 41

MIRRO
p. 59

DRO
p. 75

WIRO
p. 119

J.J.W.
p. 127

REVER
p. 145

back

SHE LIGHTS UP EVERY ROOM

ODREY ON THE WALL

She exudes the elegance of the 50s like no other. And can change its look faster than any movie star. Who are we talking about? ODREY, of course. She looks stunning in almost any colour combination. And she is highly flexible in terms of the shape of the shade. There are three different shades to choose from, available in black or gold. They can be combined with two mounts in black or gold to create an ever-changing luminaire. ODREY can emit light either upwards, downwards, or in both directions, which is especially lovely. So corridors or restaurant walls can be accentuated with the utmost flair.

Sie versprüht die Eleganz der 50er wie keine andere. Und kann ihren Look schneller wechseln als jeder Filmstar. Von wem hier die Rede ist? Natürlich von ODREY, die in nahezu jeder Farbkombination umwerfend aussieht. Und sich auch in punc-to Schirmform höchst flexibel zeigt. Zur Auswahl stehen drei verschiedene Shades, die in Schwarz oder Gold zu haben sind. Sie können mit je zwei Mountings in Schwarz oder Gold kombi-niert werden und ergeben so immer wieder eine neue Leuchte. Besonders schön: ODREY kann das Licht entweder nach oben, nach unten oder in beide Richtungen abgeben. So können Flure oder Restaurantwände gekonnt akzentuiert werden.

MIX AND MATCH
weverducre.com/odrey-configurator

CREATE YOUR VERY OWN ODREY

MOUNTING + SHADES

MOUNTING
available in ● black or ● gold

1.0

2.0

SHADES
available in ● black or ● gold

3.0
ø 100

4.0
ø 124

5.0
ø 115

3.0 + 4.0

4.0 + 4.0

5.0 + 3.0

back

PRIVATE RESIDENCE GERMANY

ODREY

WALL SURFACE

p. 367
p. 385
p. 419

GOOD DESIGN

As awarded by The Chicago Athenaeum: Museum of Architecture and Design



3.0

4.0

5.0

1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
steel and aluminium wet painted

0.29kg IP20

mounting

	CODE
	257420G0
	257420B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K	901228B3
3000K	901228B5

more lamps and specs on page 729

ALWAYS USE

shade 3.0 | 4.0 | 5.0 in gold

	CODE
3.0	911423G1
4.0	911424G1
5.0	911425G1

shade 3.0 | 4.0 | 5.0 in black

	CODE
3.0	911423B1
4.0	911424B1
5.0	911425B1

back

CAFE BREDA | NETHERLANDS

ODREY

WALL SURFACE

p. 367
p. 385
p. 419

As awarded by The Chicago Athenaeum: Museum of Architecture and Design

3.0

4.0

5.0



2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
steel and aluminium wet painted

0.29kg IP20

mounting

	CODE
	257320G0
	257320B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K	901228B3
3000K	901228B5

more lamps and specs on page 729

ALWAYS USE

2 shades needed

shade 3.0 | 4.0 | 5.0 in gold

	CODE
3.0	911423G1
4.0	911424G1
5.0	911425G1

shade 3.0 | 4.0 | 5.0 in black

	CODE
3.0	911423B1
4.0	911424B1
5.0	911425B1

SIMPLE FORMALITY

HAVE A LOOK
weverducre.com/universal-stars-configurator

Even if maths wasn't your favourite subject, you'll love these four stunning geometric shapes. BOX, DOCUS, HEXO, and RAY are hard to beat when it comes to elegance and flexibility. That makes them ideal for virtually any space. Regardless of whether they sparkle from the ceiling or shine from the walls. These sleek, narrow luminaires are available in six gorgeous colours, as well as in many different versions. For outdoor use too. They're sure to wow your friends and family the second they step foot in the foyer. Who would have thought geometry could be so enthralling?

Auch wenn Mathematik nicht Ihr Lieblingsfach war: Diese vier atemberaubenden geometrischen Formen werden Sie lieben. BOX, DOCUS, HEXO und RAY sind in puncto Eleganz und Flexibilität nämlich kaum zu übertreffen. Und deshalb für nahezu jede Raumsituation geeignet. Ganz egal, ob man sie von der Decke blinzeln oder von den Wänden strahlen lässt. Denn die schlichten, schmalen Leuchten sind nicht nur in sechs tollen Farbtönen, sondern auch in vielen verschiedenen Ausführungen erhältlich. Auch für den Außenbereich. So kann man lieben Freunden und Verwandten schon im Eingangsbereich ein staunendes „Wow" entlocken. Wer hätte gedacht, dass Geometrie so spannend sein kann?



BOX



DOCUS

HEXO



RAY

back

PRIVATE RESIDENCE SWEDEN

RAY mini

WALL SURFACE

p. 261 p. 357



1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.21kg IP20

aluminium | ø67 x 115

	CODE
	300220W0
	300220L0
	300220G0
	300220P0
	300220B0

wood | ø70 x 115

	CODE
walnut	300220WN0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.36kg IP20

aluminium | ø67 x 200

	CODE
	301220W0
	301220L0
	301220G0
	301220P0
	301220B0

wood | ø70 x 200

	CODE
walnut	301220WN0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

back

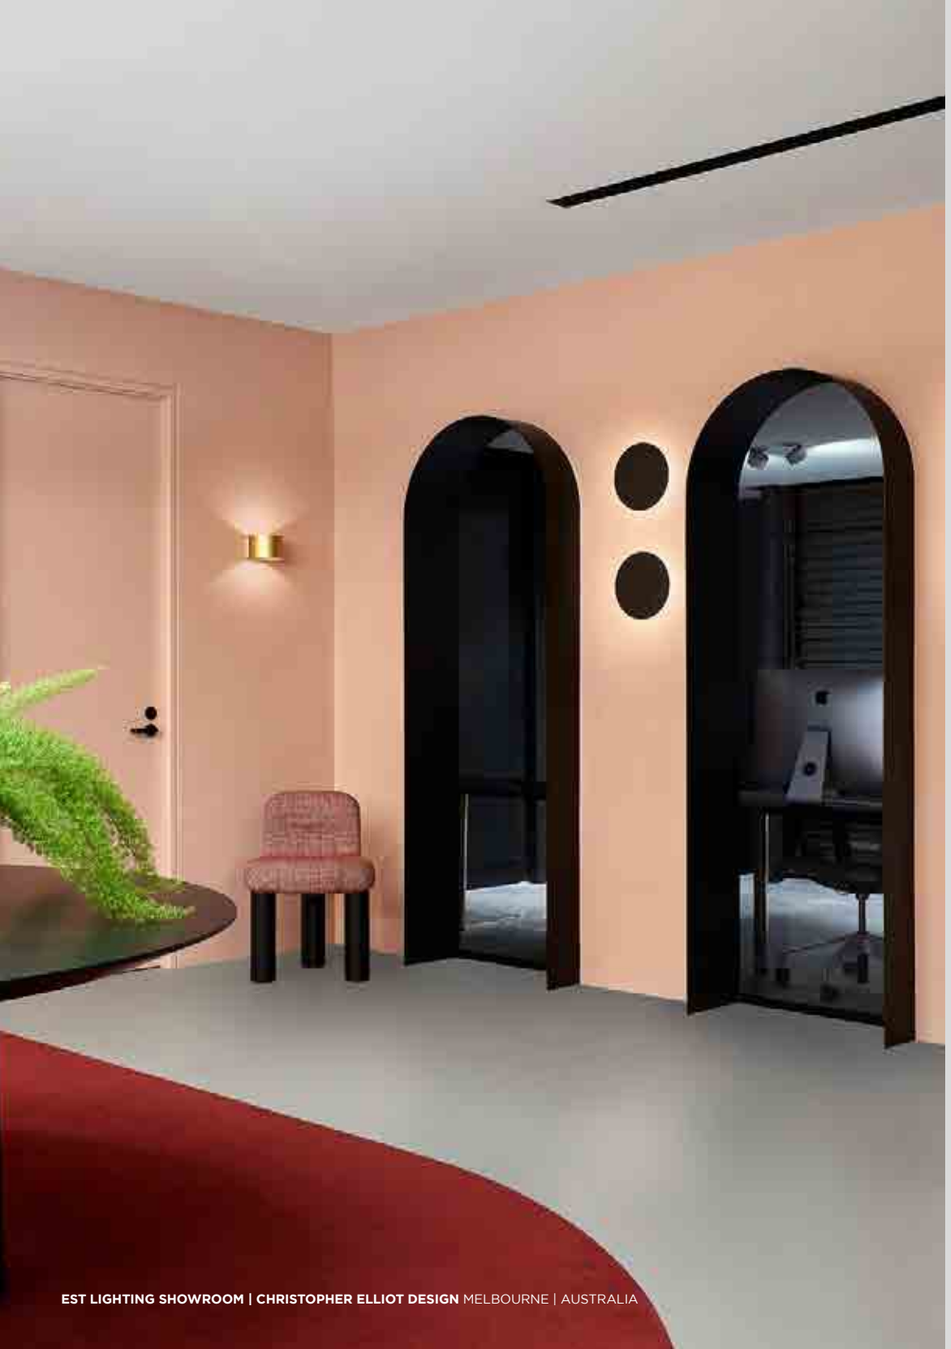

EST LIGHTING SHOWROOM | CHRISTOPHER ELLIOT DESIGN MELBOURNE | AUSTRALIA

RAY

WALL SURFACE

p. 263 p. 387 p. 399 p. 425 p. 607 p. 633

1.0 QT14

QT14 max. 75W | G9
220-240VAC | 50-60Hz
aluminium powder coated
brushed

0.62kg IP20

	CODE
	3221G0W0
	3221G0L0
	3221G0G0
	3221G0Q0
	3221G0P0
	3221G0B0

1.0 LED

LED 6W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
brushed | incl. flaps for adjustable
beam angle

0.62kg IP20

	CODE
	332168W_
	332168L_
	332168G_
	332168Q_
	332168P_
	332168B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	400 | >80	2
3000K	440 | >80	4
1800-2850K	400 | >80	9

2.0 LED

2x LED 3W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
brushed | incl. flaps for adjustable
beam angle

0.69kg IP20

	CODE
	332148W_
	332148L_
	332148G_
	332148Q_
	332148P_
	332148B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	2x200 | >80	2
3000K	2x220 | >80	4
1800-2850K	2x200 | >80	9

OPTIONAL

QT14 LED 3W

	CODE
2700K | 200lm	9019G705
3000K | 300lm	9019G703

flaps for adjustable beam angle

	CODE
	900401W0

more lamps and specs on page 730

back

OFFICE MORGAN MCKINLEY | INTERIOR DESIGN VALMONT SYDNEY | AUSTRALIA

RAY

WALL SURFACE

p. 263 p. 387 p. 399 p. 425 p. 607 p. 633

3.0 LED

2x LED 3W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
brushed | incl. flaps for adjustable
beam angle

0.85kg IP20

	CODE
	332248W_
	332248L_
	332248G_
	332248Q_
	332248P_
	332248B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	2x200 | >80	2
3000K	2x220 | >80	4
1800-2850K	2x200 | >80	9

back

PRIVATE RESIDENCE | 3ARCHITECTEN BELGIUM

BOX mini

WALL SURFACE

p. 269 p. 359





1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.24kg IP20

aluminium | 67 x 67 x 115

	CODE
	300120W0
	300120L0
	300120G0
	300120P0
	300120B0

wood | 70 x 70 x 115

	CODE
walnut	300120WN0

2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.44kg IP20

aluminium | 67 x 67 x 200

	CODE
	301120W0
	301120L0
	301120G0
	301120P0
	301120B0

wood | 70 x 70 x 200

	CODE
walnut	301120WN0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

Rev. 001/2021-06

back

PRIVATE RESIDENCE | INTÉRIEURS D'ARCHITECTES FRANCE

BOX

WALL SURFACE

p. 271 p. 427 p. 611 p. 641



1.0 QT14

QT14 max. 75W | G9
220-240VAC | 50-60Hz
aluminium powder coated
brushed | wood |

0.66kg IP20

aluminium | 100 x 100 x 100

	CODE
	3211G0W0
	3211G0L0
	3211G0G0
	3211G0Q0
	3211G0P0
	3211G0B0

wood | 106 x 106 x 100

	CODE
walnut	3211G0WN0

OPTIONAL

QT14 LED 3W

	CODE
2700K | 200lm	9019G705
3000K | 300lm	9019G703

flaps for adjustable beam angle

	CODE
	900401W0

more lamps and specs on page 730



1.0 LED

LED 6W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
brushed | wood | incl. flaps for
adjustable beam angle

0.60kg IP20

aluminium | 100 x 100 x 100

	CODE
	331168W_
	331168L_
	331168G_
	331168Q_
	331168P_
	331168B_

wood | 106 x 106 x 100

	CODE
walnut	331168WN_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	400 | >80	2
3000K	440 | >80	4
1800-2850K	400 | >80	9



2.0 LED

2x LED 3W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
brushed | wood | incl. flaps for
adjustable beam angle

0.67kg IP20

aluminium | 100 x 100 x 100

	CODE
	331148W_
	331148L_
	331148G_
	331148Q_
	331148P_
	331148B_

wood | 106 x 106 x 100

	CODE
walnut	331148WN_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	2x200 | >80	2
3000K	2x220 | >80	4
1800-2850K	2x200 | >80	9

VINARIJA GALIĆ | DVA ARHITEKTA KUTJEVO | CROATIA

back

HOTEL DOMAINE DE LA VOISINE | CYRIL DURAND BEHAR ARCHITECTES | DISTYLIGHT FRANCE

BOX

WALL SURFACE

p. 271 p. 427 p. 611 p. 641



3.0 LED

LED 2x LED 3W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
brushed | wood | incl. flaps for
adjustable beam angle

0.86kg IP20

aluminium | 100 x 100 x 160

	CODE
	331248W_
	331248L_
	331248G_
	331248Q_
	331248P_
	331248B_

wood | 106 x 106 x 160

	CODE
walnut	331248WN_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	2x200 | >80	2
3000K	2x220 | >80	4
1800-2850K	2x200 | >80	9

HOTEL DOMAINE DE LA VOISINE | CYRIL DURAND BEHAR ARCHITECTES | DISTYLIGHT FRANCE

DOCUS mini

WALL SURFACE

p. 277 p. 361





1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.24kg IP20

	CODE
	300320W0
	300320L0
	300320G0
	300320P0
	300320B0

2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.43kg IP20

	CODE
	301320W0
	301320L0
	301320G0
	301320P0
	301320B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

back

PRIVATE RESIDENCE | MARTIN ENSINK - MAEN INTERIORS NETHERLANDS

HEXO mini

WALL SURFACE

p. 283 p. 363



1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.23kg IP20

	CODE
	300420G0
	300420Q0
	300420P0
	300420B0

2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.40kg IP20

	CODE
	301420G0
	301420Q0
	301420P0
	301420B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

back

TRAIN

WALL SURFACE

p. 647

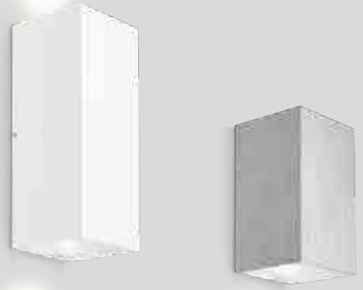

1.0

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
aluminium powder coated
brushed

0.24kg IP20

36°

2700K | >90 CRI | 390lm

	CODE
	306668W3
	306668G3
	306668B3

3000K | >90 CRI | 420lm

	CODE
	306668W5
	306668L5

2.0

2x LED 4W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
aluminium powder coated
brushed

0.35kg IP20

36°

2700K | >90 CRI | 2x245lm

	CODE
	306768W3
	306768G3
	306768B3

3000K | >90 CRI | 2x255lm

	CODE
	306768W5
	306768L5

back

CENTRAL

WALL SURFACE

p. 651

1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.56kg IP20

	CODE
	313574W_
	313574L_
	313574G_
	313574B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	480	>90	3
3000K	520	>90	5

2.0

2x LED 4W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.50kg IP20

	CODE
	313674W_
	313674L_
	313674G_
	313674B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x270	>90	3
3000K	2x290	>90	5

Rev. 001/2021-06

back

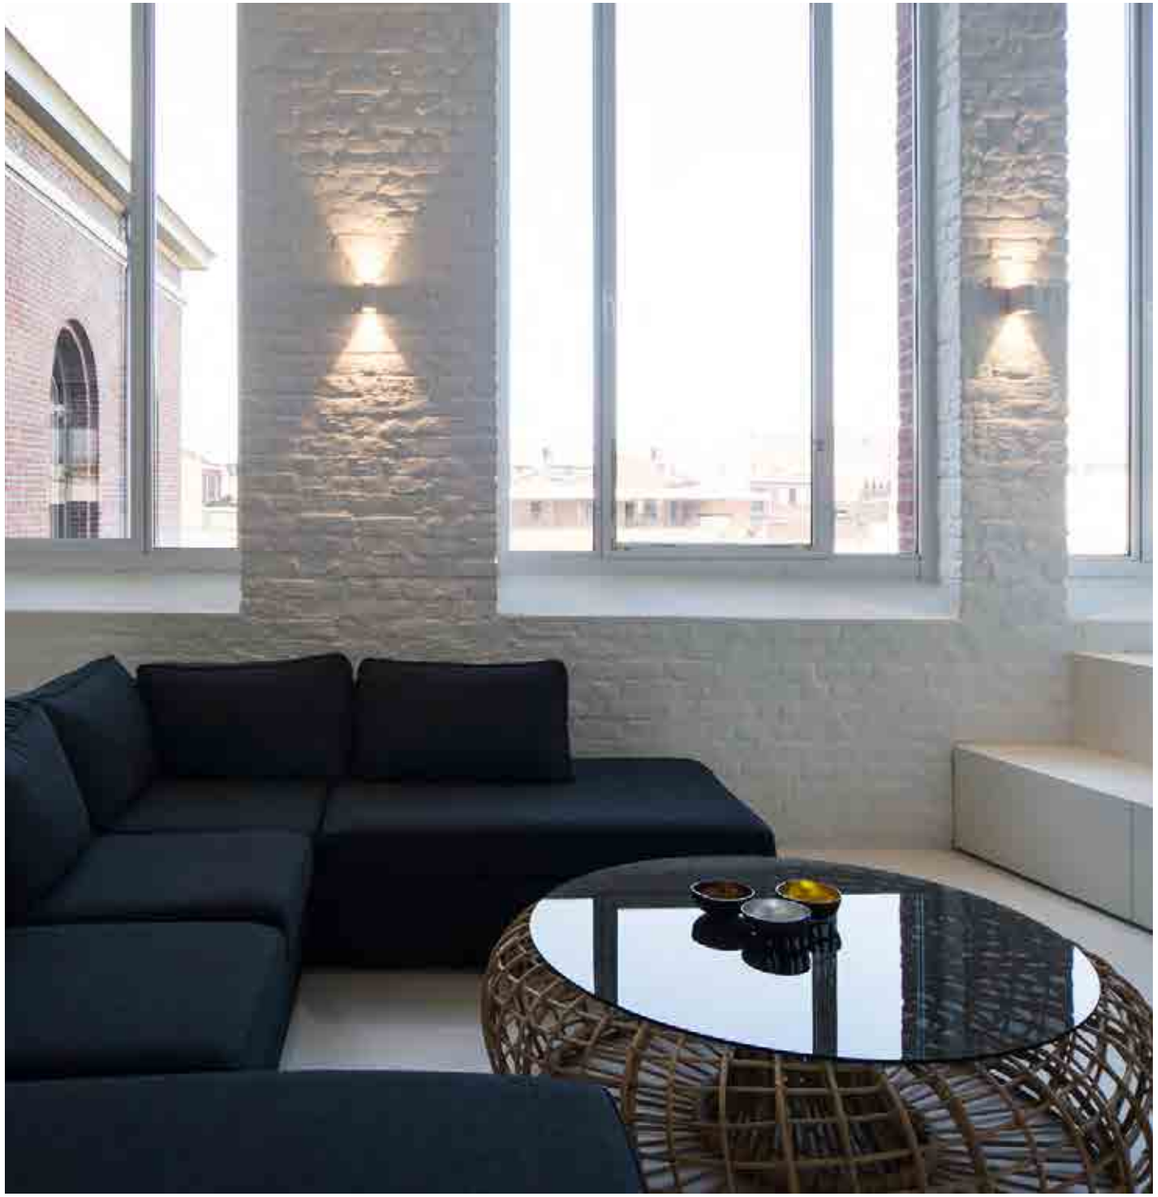

PRIVATE RESIDENCE | GRAUX & BAEYENS ARCHITECTEN BELGIUM

STATION

WALL SURFACE

p. 653





1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.52kg IP20

3000K | >90 CRI | 520lm

	CODE
	314574W5
	314574L5

2.0

2x LED 4W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.50kg IP20

3000K | >90 CRI | 2x290lm

	CODE
	314674W5
	314674L5

Rev. 001/2021-06

back

HOTEL SALZBURG | AUSTRIA

SARA snooze

WALL SURFACE

p. 309 p. 379



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
incl. switch on/off

0.33kg IP20 0,3+

90° 330°

	CODE
	157320W0
	157320G0
	157320K0
	157320B0

OPTIONAL

PAR16 LED GU10 7W | phase-cut dim

	CODE
2700K | white	901228W2
2700K | black	901228B3
3000K | white	901228W4
3000K | black	901228B5

more lamps and specs on page 729

Rev. 001/2021-06

back

HOTEL MANCHESTER | UNITED KINGDOM

MICK snooze

WALL SURFACE

p. 319 p. 353

DESIGNED BY
S&R CORNELISSEN

reddot winner 2020
lighting design



1.0

LED 8.2W | 220-240VAC
50-60Hz | COB 3-step | incl. PS
aluminium powder coated
incl. switch on/off

0.39kg IP20 0,3 P

18° 350° 90°

	CODE
	159654J_
	159654K_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	190 | >90	3
3000K	200 | >90	5

PRIVATE RESIDENCE UNITED KINGDOM

Rev. 002/2021-07

MICK WALL

WALL SURFACE

p. 319 p. 353

DESIGNED BY
S&R CORNELISSEN

reddot winner 2020
lighting design







1.0

LED 8.2W | 220-240VAC
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.35kg IP20 0,3-

18° 350° 90°

	CODE
	159354J_
	159354K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	230	>90	3
3000K	250	>90	5

2.0

LED 2x LED 7.5W | 220-240VAC
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.62kg IP20 0,3-

18° 350° 90°

	CODE
	159454J_
	159454K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x230	>90	3
3000K	2x250	>90	5

back

OFFICE CEEBE | WEYGERS HASSELT | BELGIUM

LEENS

WALL SURFACE





1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

1.11kg IP20

3000K | >90 CRI | 490lm

	CODE
	311174W5
	311174L5
	311174B5

2.0

2x LED 4W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.90kg IP20

3000K | >90 CRI | 2x275lm

	CODE
	311274W5
	311274L5
	311274B5

back

PRIVATE RESIDENCE GERMANY

BENTO

WALL SURFACE





1.3

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.74kg IP20

3000K | >90 CRI | 310lm

	CODE
	309274W5
	309274B5

3.6

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.48kg IP20

3000K | >90 CRI | 310lm

	CODE
	309374W5
	309374B5

back

PRIVATE RESIDENCE AUSTRIA

SCAVA

WALL SURFACE



1.0

LED 24W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
opal PC cover

0.42kg IP20

	CODE
	350168W_
	350168K_
	350168B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1290	>90	3
3000K	1320	>90	5

back

PRIVATE RESIDENCE FINLAND

FINLIN

WALL SURFACE

GOOD DESIGN

As awarded by The Chicago Athenaeum: Museum of Architecture and Design







1.0

LED 6W | 220-240VAC
50-60Hz | PCB 3-step
phase-cut dim | incl. PS
aluminium powder coated
opal PMMA diffuser

0.15kg IP20 1-0,3+ P

	CODE
	370184K_
	370184B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	350	>90	3
3000K	380	>90	5

2.0

LED 12W | 220-240VAC
50-60Hz | PCB 3-step
phase-cut dim | incl. PS
aluminium powder coated
opal PMMA diffuser

0.18kg IP20 1-0,3+ P

	CODE
	370284K_
	370284B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	700	>90	3
3000K	760	>90	5

3.0

LED 12W | 220-240VAC
50-60Hz | PCB 3-step
phase-cut dim | incl. PS
aluminium powder coated
opal PMMA diffuser

0.30kg IP20 1-0,3+ P

	CODE
	370384K_
	370384B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	700	>90	3
3000K	760	>90	5

4.0

LED 12W | 220-240VAC
50-60Hz | PCB 3-step
phase-cut dim | incl. PS
aluminium powder coated
opal PMMA diffuser

0.20kg IP20 1-0,3+ P

	CODE
	370484K_
	370484B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	700	>90	3
3000K	760	>90	5

back

FLEISCHMANUFAKTUR HACKL LINZ | AUSTRIA

OFFICE GERMANY

PRIVATE RESIDENCE POLAND

CLEA

WALL SURFACE

p. 323







1.0

LED 10.3W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium wet painted | white
opal glass hand blown

0.62kg IP20

	CODE
	181488W_
	181488SG_
	181488FJ_
	181488B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	550	>90	3
3000K	575	>90	5

2.0

LED 10.3W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium wet painted | white
opal glass hand blown

1.00kg IP20

	CODE
	181588W_
	181588SG_
	181588FJ_
	181588B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	550	>90	3
3000K	575	>90	5

3.0

LED 10.3W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium wet painted | white
opal glass hand blown

2.20kg IP20

	CODE
	181688W_
	181688SG_
	181688FJ_
	181688B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	550	>90	3
3000K	575	>90	5

available from summer 2021

Rev. 001/2021-06

back

FASHION STORE AUSTRIA

CLOCK

WALL SURFACE

p. 325



1.0

LED 10.3W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium and steel wet painted
white opal glass hand blown

0.66kg IP20

	CODE
	182588B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	550	>90	3
3000K	575	>90	5



2.0

LED 10.3W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium and steel wet painted
white opal glass hand blown

0.76kg IP20

	CODE
	182688B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	550	>90	3
3000K	575	>90	5



3.0

LED 10.3W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium and steel wet painted
white opal glass hand blown

1.00kg IP20

	CODE
	182788B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	550	>90	3
3000K	575	>90	5

available from summer 2021

Rev. 001/2021-06

back

PRIVATE RESIDENCE RUSSIA

MILES

WALL SURFACE

10mm
cover thickness
marble



7mm
cover thickness
walnut

5mm
cover thickness
aluminium





2.0 ROUND

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
brushed

0.77kg IP20

marble | walnut

	CODE
	317574MW_
	317574MB_
	317574WN_

aluminium

	CODE
	317574W_
	317574G_
	317574Q_
	317574P_
	317574B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	365 | >90	3
3000K	365 | >90	5

3.0 ROUND

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
brushed

1.09kg IP20

marble | walnut

	CODE
	317774MW_
	317774MB_
	317774WN_

aluminium

	CODE
	317774W_
	317774G_
	317774Q_
	317774P_
	317774B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	365 | >90	3
3000K	365 | >90	5

back

HOTEL STEIGENBERGER | ROOMS GMBH KREMS | AUSTRIA

MILES

WALL SURFACE



10mm
cover thickness
marble

7mm
cover thickness
walnut



5mm
cover thickness
aluminium





2.0 CARRÉ

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
brushed

1.03kg IP20

marble | walnut

	CODE
	317474MW_
	317474MB_
	317474WN_

aluminium

	CODE
	317474W_
	317474G_
	317474Q_
	317474P_
	317474B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	365	>90	3
3000K	365	>90	5

3.0 CARRÉ

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
brushed

1.63kg IP20

marble | walnut

	CODE
	317674MW_
	317674MB_
	317674WN_

aluminium

	CODE
	317674W_
	317674G_
	317674Q_
	317674P_
	317674B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	365	>90	3
3000K	365	>90	5

back

PRIVATE RESIDENCE UKRAINE

MILES

WALL SURFACE

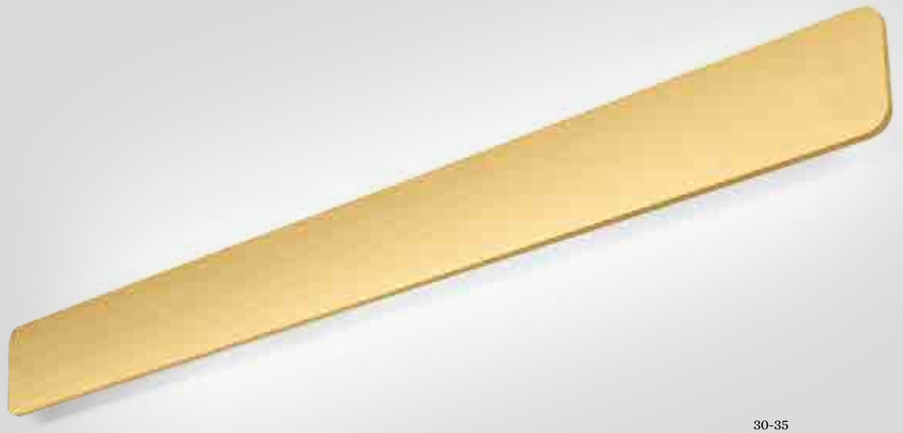





9.0

LED 31W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
brushed

2.13kg IP20

marble | walnut

	CODE
	317278MW_
	317278MB_
	317278WN_

aluminium

	CODE
	317278W_
	317278L_
	317278G_
	317278B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1310	>90	3
3000K	1330	>90	5

12.0

LED 41W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
brushed

2.62kg IP20

marble | walnut

	CODE
	317378MW_
	317378MB_
	317378WN_

aluminium

	CODE
	317378W_
	317378L_
	317378G_
	317378B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1750	>90	3
3000K	1780	>90	5



10mm
cover thickness
marble

7mm
cover thickness
walnut



5mm
cover thickness
aluminium

back

EST LIGHTING SHOWROOM | CHRISTOPHER ELLIOT DESIGN MELBOURNE | AUSTRALIA

VENN

WALL SURFACE

p. 327 p. 471

DESIGNED
BY S&R CORNELISSEN

As awarded by The Chicago Athenaeum: Museum of Architecture and Design

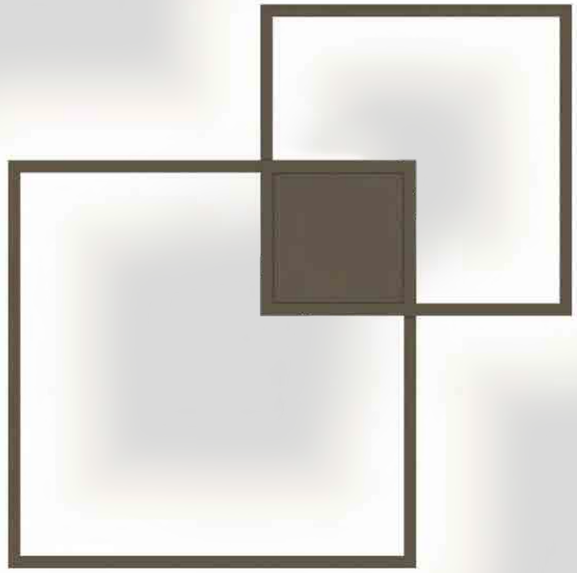





1.0

LED 38W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS
aluminium powder coated
opal PMMA cover | indirect

2.50kg IP20

phase-cut dim

	CODE
	149184W_
	149184Q_
	149184B_

DALI dim

	CODE
	149185W_
	149185Q_
	149185B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2950	>80	2
3000K	3140	>80	4

2.0

LED 47W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS
aluminium powder coated
opal PMMA cover | direct/indirect

2.50kg IP20

phase-cut dim

	CODE
	149284W_
	149284Q_
	149284B_

DALI dim

	CODE
	149285W_
	149285Q_
	149285B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	540/2950	>80	2
3000K	580/3140	>80	4

back

CASA LLAMP | MALLORCA PRIME MALLORCA | SPAIN

MUSEUM LONDON | UNITED KINGDOM

DARF

WALL SURFACE

p. 467

ARCHITECT
PHILIPP WEINBERGER &
STUDIO MARCH GUT

phase-cut dim

non-dim

light distribution

project picture application without cable



1.0

LED 22W | 220-240VAC
50-60Hz | aluminium powder coated | plastic wet painted incl. black textile cable plug with switch

0.33kg IP20

non dim

	CODE
	2563T7B_

LIGHT COLOUR	LUMEN | CRI	CODE
3000K | 22W	3300 | >80	4
4000K | 22W	3700 | >80	6

cable plug with switch

phase-cut dim

	CODE
	2563T8B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K | 22W	1920 | >90	3
3000K | 22W	2095 | >90	5

cable plug with dimmer

Rev. 001/2021-06

back

RESTAURANT GOTHENBURG | SWEDEN

MIRBA IP44

WALL SURFACE







1.0 LED

LED 6/9W | 220-240VAC
PCB 3-step | output selector
phase-cut dim
aluminium powder coated
opal PMMA cover

0.51kg IP44

	CODE
	328184W_
	328184E_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	L 320/H 560	>90	3
3000K	L 360/H 620	>90	5

2.0 LED

LED 7/12W | 220-240VAC
PCB 3-step | output selector
phase-cut dim
aluminium powder coated
opal PMMA cover

0.65kg IP44

	CODE
	328284W_
	328284E_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	L 530/H 820	>90	3
3000K	L 590/H 900	>90	5

3.0 LED

LED 12/18W | 220-240VAC
PCB 3-step | output selector
phase-cut dim
aluminium powder coated
opal PMMA cover

0.69kg IP44

	CODE
	328384W_
	328384E_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	L 610/H 1050	>90	3
3000K	L 680/H 1150	>90	5

E

black end cap and
black housing

back

OFFICE VIENNA | AUSTRIA

MIRBI long IP44

WALL SURFACE

p. 255 p. 337







1.0

LED 4/6W | 220-240VAC
PCB 3-step | output selector
phase-cut dim
aluminium powder coated
clear + opal PMMA cover

0.72kg IP44

CODE 329184W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	L 190/H 300	>90	3
3000K	L 210/H 330	>90	5

2.0

LED 7/12W | 220-240VAC
PCB 3-step | output selector
phase-cut dim
aluminium powder coated
clear + opal PMMA cover

1.53kg IP44

CODE 329284W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	L 320/H 550	>90	3
3000K	L 365/H 620	>90	5

3.0

LED 12/18W | 220-240VAC
PCB 3-step | output selector
phase-cut dim
aluminium powder coated
clear + opal PMMA cover

2.25kg IP44

CODE 329384W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	L 550/H 750	>90	3
3000K	L 610/H 840	>90	5

back

OUT
DOOR

CEILING RECESSED

p. 591 — 597

CEILING RECESSED

DEEP BIJOU
p. 593

DEEP
p. 593

INTRA
p. 595

TAIO ROUND
p. 597

PRIVATE RESIDENCE AUSTRIA

DEEP bijou | DEEP IP65

OUTDOOR
CEILING RECESSED

p. 235
p. 237





1.0 LED BIJOU

LED 4.5W | 500mA | 9Vf
COB 3-step | excl. power supply
aluminium powder coated

0.093kg IP65 0,3+ 6 30°

85

wire springs 50-52 4-25

	CODE
	165361W_
	165361B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	360	>90	3
3000K	390	>90	5

ALWAYS USE

power supply IP67

	CODE
500mA | 7W	90214301

more power supplies on page 726

1.0 LED

LED 6/9W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated

0.24kg IP65 0,3+ 6 36°

80

wire springs 86-89 4-27

	CODE
	184161W_
	184161B_

blade springs 86-89 min 4

	CODE
	184161W_C
	184161B_C

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	375/575	>90	3
3000K	405/620	>90	5

ALWAYS USE

power supply IP68

	CODE
350mA | 17W	90213602
500mA | 24W	90214702

more power supplies on page 726

IC rated

Rev. 001/2021-07

back

PRIVATE RESIDENCE | KILLIAN GARTNER | ROOMS ATELIER AUSTRIA

INTRA

OUTDOOR
CEILING RECESSED





1.0 OPAL

LED 7W | 220-240VAC
PCB 3-step | phase-cut dim
aluminium | stainless steel
opal PMMA | polyamide
0.25m cable

0.15kg IP65 3-step-dim P

76-84 70 2-25

	CODE
	733168W_
	733168I_
	733168D_
	733168B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	350	>90	5

2.0 SPOT

LED 7W | 220-240VAC
PCB 3-step | phase-cut dim
aluminium | stainless steel
clear lens | polyamide
0.25m cable

0.15kg IP65 3-step-dim P 38°

76-84 70 2-25

	CODE
	733158W_
	733158I_
	733158D_
	733158B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	590	>80	4

back

PRIVATE RESIDENCE | MINIMAL STUDIO SPAIN

IC rated

TAIO ROUND IP65

OUTDOOR
CEILING RECESSED

p. 243 p. 335 p. 601 p. 635

1.0 LED

LED 6/9W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
opal glass lens

0.13kg IP65 0,3 6

70 70 4-27

	CODE
	180181W_
	180181G_
	180181B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	310/425	>90	3
3000K	335/455	>90	5

ALWAYS USE

power supply IP68

	CODE
350mA | 17W	90213602
500mA | 24W	90214702

more power supplies on page 726

Rev. 001/2021-07

back

CEILING SURFACE

p. 599 — 617

CEILING SURFACE SPOTLIGHTS

TAIO ROUND
p. 601

TRAM ROUND
p. 603

TRAM CARRÉ
p. 603

TUBE
p. 605

RAY
p. 607

TUBE CARRÉ
p. 609



BOX
p. 611

CEILING SURFACE LUMINAIRES

ROB
p. 615

BLAS 1.0
p. 617

BLAS 2.0
p. 617

PRIVATE RESIDENCE BELGIUM

TAIO ROUND

OUTDOOR
CEILING SURFACE

p. 243 p. 335 p. 597 p. 635

1.0

LED 10.5W | 100-240VAC
50-60Hz | COB 3-step | incl. PS
phase-cut dim | aluminium
powder coated | opal glass lens

0.55kg IP65

	CODE
	180281W_
	180281A_
	180281Q_
	180281B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	425 | >90	3
3000K	455 | >90	5

back

TRAM

OUTDOOR
CEILING SURFACE

p. 627

1.0 ROUND

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
aluminium powder coated

0.24kg IP65 0,3+ 36°

	CODE
	747368W_
	747368A_
	747368B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	420	>90	5

1.0 CARRÉ

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
aluminium powder coated

0.26kg IP65 0,3+ 36°

	CODE
	747468W_
	747468A_
	747468B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	420	>90	5

TUBE

OUTDOOR
CEILING SURFACE

p. 629

1.0 LED

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
aluminium powder coated

0.53kg IP65 38°

	CODE
	734164W_
	734164D_
	734164A_
	734164B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	475	>80	4

1.0 PAR16

PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.60kg IP65

	CODE
	734120W0
	734120D0
	734120A0
	734120B0

OPTIONAL

PAR16 LED GU10 4.3W

	CODE
2700K	905227S2
3000K	905227S4

more specs on page 729

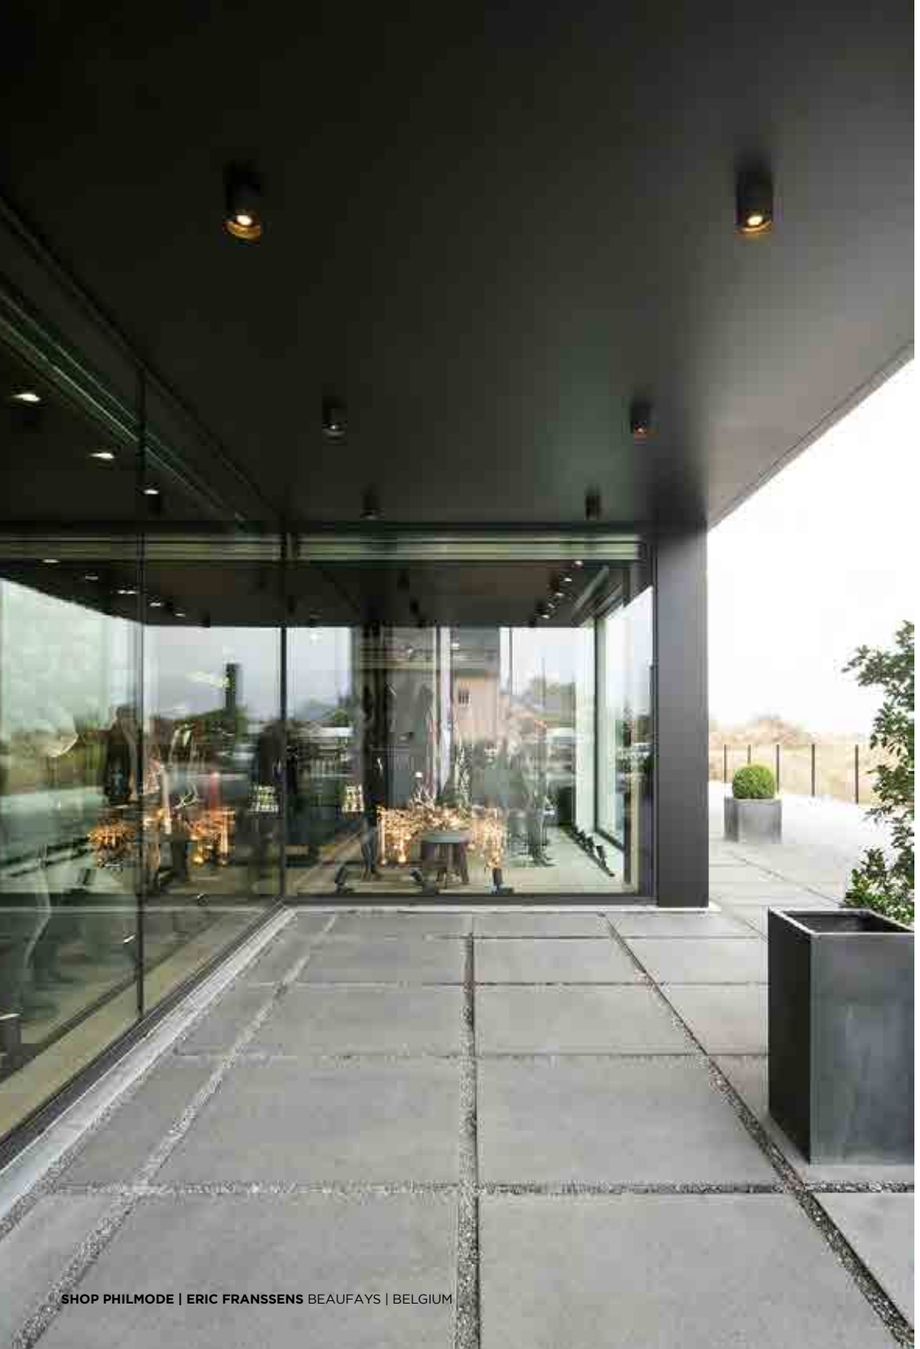

SHOP PHILMODE | ERIC FRANSSENS BEAUFAYS | BELGIUM

RAY

OUTDOOR
CEILING SURFACE

p. 263 p. 387 p. 399 p. 425 p. 527 p. 633

1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
aluminium powder coated

0.63kg IP65 32°

	CODE
	735364W_
	735364D_
	735364B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	580	>80	2
3000K	610	>80	4
1800-2850K	390	>95	9

OPTIONAL

inner cover

	CODE
	911041W1
	911041D1
	911041B1

back

TUBE CARRÉ

OUTDOOR
CEILING SURFACE

p. 637





1.0 LED

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.64kg IP65 34°

	CODE
	734264W_
	734264D_
	734264A_
	734264B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	390	>90	5

1.0 PAR16

PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.69kg IP65

	CODE
	734220W0
	734220D0
	734220A0
	734220B0

OPTIONAL

PAR16 LED GU10 4.3W

	CODE
2700K	905227S2
3000K	905227S4

more specs on page 729

PRIVATE RESIDENCE FRANCE

BOX

OUTDOOR
CEILING SURFACE

p. 271 p. 427 p. 535 p. 641



inner reflector

inner cover

OPTIONAL

single inner reflector

	CODE
	911211W1
	911211Q1
	911211D1
	911211B1

inner cover

	CODE
	911011W1
	911011Q1
	911011D1
	911011B1

1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
aluminium powder coated

0.67kg IP65 0,3-1 P 32°

	CODE
	735164W_
	735164A_
	735164Q_
	735164D_
	735164B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	580 | >80	2
3000K	610 | >80	4
1800-2850K	390 | >95	9

back

PRIVATE RESIDENCE | STIEWE+ENGELS GERMANY

ROB

OUTDOOR
CEILING SURFACE

p. 329



1.6

LED 13W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
opal PMMA cover

0.70kg IP44

	CODE
	701184W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	860	>90	3
3000K	950	>90	5

2.6

LED 18W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
opal PMMA cover

1.20kg IP44

	CODE
	701284W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1250	>90	3
3000K	1380	>90	5

3.5

LED 32W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
opal PMMA cover

1.90kg IP44

	CODE
	701384W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1820	>90	3
3000K	1950	>90	5



OPTIONAL

dimmer

	CODE
phase-cut + bluetooth	90019100

more dimmers and specs on page 728

OPTIONAL

dimmer

	CODE
phase-cut + bluetooth	90019100

more dimmers and specs on page 728

OPTIONAL

dimmer

	CODE
phase-cut + bluetooth	90019100

more dimmers and specs on page 728

back

PRIVATE RESIDENCE | PETER RANEBURGER AUSTRIA

BLAS

OUTDOOR
CEILING SURFACE



1.0

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated | glass

1.00kg IP65

	CODE
	736187W_
	736187D_
	736187B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	840	>80	4

2.0

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated | glass

1.30kg IP65

	CODE
	736287W_
	736287D_
	736287B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	840	>80	4

back

WALL RECESSED

p. 619 — 623

WALL RECESSED

SMILE IN 1.0
p. 621

SMILE IN 2.0
p. 621

ORIS 0.7
p. 623

ORIS 2.0
p. 623

PRIVATE RESIDENCE | ROOMS GMBH GREECE

SMILE IN

OUTDOOR
WALL RECESSED

p. 503





1.0

LED 4/6W | 350/500mA | 9Vf
COB 3-step | excl. power supply
aluminium powder coated

0.39kg IP65 0,3 86 40 min 13

	CODE
	702151W_
	702151D_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	230/320	>80	4

ALWAYS USE

power supply IP68

	CODE
350mA | 17W	90213602
500mA | 24W	90214702

more power supplies on page 726

OPTIONAL

	CODE
recessed ring	90012030

2.0

LED 4/6W | 350/500mA | 9Vf
COB 3-step | excl. power supply
aluminium powder coated

0.42kg IP65 0,3 86 40 min 13

	CODE
	703151W_
	703151D_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	230/320	>80	4

ALWAYS USE

power supply IP68

	CODE
350mA | 17W	90213602
500mA | 24W	90214702

more power supplies on page 726

OPTIONAL

	CODE
recessed ring	90012030

back

PRIVATE RESIDENCE | SPADO ARCHITECTS AUSTRIA

ORIS

OUTDOOR
WALL RECESSED

p. 513



0.7

LED 1/2W | 350/700mA | 3Vf
PCB 3-step | excl. power supply
aluminium powder coated

0.28kg | IP65 | 0,3+ | G

47x182 | 40 | 12-40

	CODE
	709161W_
	709161D_
	709161B_

LIGHT COLOUR	LUMEN | CRI	CODE
3000K	90/150 | >80	4

ALWAYS USE

power supply IP66

	CODE
350mA | 3W	90213101
700mA | 7W	90215301

more power supplies on page 726

OPTIONAL

	CODE
recessed housing incl. plasterkit	90012039
concrete housing	90012044



1.3

LED 2/4W | 350/700mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated

0.34kg | IP65 | 0,3+ | G

115x117 | 40 | 12-40

	CODE
	709261W_
	709261D_
	709261B_

LIGHT COLOUR	LUMEN | CRI	CODE
3000K	180/300 | >80	4

ALWAYS USE

power supply IP66

	CODE
350mA | 3W	90213101
700mA | 7W	90215301

more power supplies on page 726

OPTIONAL

	CODE
recessed housing incl. plasterkit	90012041
concrete housing	90012040



2.0

LED 2/4W | 350/700mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated

0.42kg | IP65 | 0,3+ | G

115x185 | 40 | 12-40

	CODE
	709361W_
	709361D_
	709361B_

LIGHT COLOUR	LUMEN | CRI	CODE
3000K	180/300 | >80	4

ALWAYS USE

power supply IP66

	CODE
350mA | 3W	90213101
700mA | 7W	90215301

more power supplies on page 726

OPTIONAL

	CODE
recessed housing incl. plasterkit	90012043
concrete housing	90012042

WALL SURFACE

p. 625 — 667

WALL SURFACE SPOTLIGHTS

TRAM
p. 627

TUBE
p. 629

RAY
p. 633

TAIO ROUND
p. 635

TUBE CARRÉ
p. 637



BOX
p. 641

TRAIN
p. 647

CENTRAL
p. 651

STATION
p. 653

BOXX
p. 655

X-BEAM
p. 657

WALL SURFACE LUMINAIRES

SMILE ON 1.0
p. 659

SMILE ON 2.0
p. 659

TAPE
p. 661

SWAM
p. 663

GETTON 1.0
p. 665

GETTON 2.0
p. 665



PALOS 1.0
p. 667

PALOS 2.0
p. 667

PALOS 3.0
p. 667

PRIVATE RESIDENCE AUSTRIA

TRAM

OUTDOOR
WALL SURFACE

p. 603

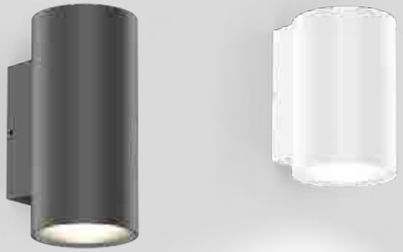



1.0

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
aluminium powder coated

0.25kg IP65 36°

	CODE
	747168W_
	747168Q_
	747168A_
	747168B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	420	>90	5

2.0

LED 2x LED 4W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
aluminium powder coated

0.30kg IP65 36°

	CODE
	747268W_
	747268Q_
	747268A_
	747268B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	2x280	>90	5

back

HOTEL VALAMAR GIRANDELLA RESORT | STUDIO 92 RABAC | CROATIA

TUBE

OUTDOOR
WALL SURFACE

p. 605

1.0 LED

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.45kg IP65 38°

	CODE
	711164W_
	711164D_
	711164A_
	711164B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	390	>90	5

1.0 PAR16

PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.52kg IP65

	CODE
	711120W0
	711120D0
	711120A0
	711120B0

OPTIONAL

PAR16 LED GU10 4.3W

	CODE
2700K	905227S2
3000K	905227S4

more specs on page 729

back

PRIVATE RESIDENCE | BUITENHUIS TUINONDERNEMINGEN SIJSELE | BELGIUM

TUBE

OUTDOOR
WALL SURFACE

p. 605

2.0 LED

LED 2x LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.74kg IP65 0,3+ 38°

	CODE
	711264W_
	711264D_
	711264A_
	711264B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	2x390	>90	5

2.0 PAR16

2x PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.90kg IP65 0,3+

	CODE
	711220W0
	711220D0
	711220A0
	711220B0

OPTIONAL

PAR16 LED GU10 4.3W

	CODE
2700K	905227S2
3000K	905227S4

more specs on page 729

back

PIARISTENGASSE 23 | © LIV.AT WIEN | AUSTRIA

RAY

OUTDOOR
WALL SURFACE

p. 263 p. 387 p. 399 p. 425 p. 527 p. 607

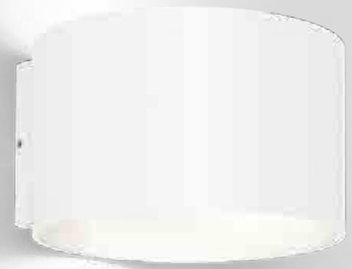



1.0

LED 6W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
incl. flaps for adjustable beam angle

0.47kg IP65

	CODE
	741168W_
	741168B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	400	>80	2
3000K	440	>80	4

2.0

LED 2x LED 3W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
incl. flaps for adjustable beam angle

0.47kg IP65

	CODE
	741148W_
	741148B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x200	>80	2
3000K	2x220	>80	4

3.0

LED 6W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
incl. flaps for adjustable beam angle

0.53kg IP65

	CODE
	741268W_
	741268B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	400	>80	2
3000K	440	>80	4

4.0

LED 2x LED 3W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
incl. flaps for adjustable beam angle

0.53kg IP65

	CODE
	741248W_
	741248B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x200	>80	2
3000K	2x220	>80	4

back

PRIVATE RESIDENCE BELGIUM

TAIO ROUND

OUTDOOR
WALL SURFACE

p. 243 p. 335 p. 597 p. 601





1.0

LED 10.5 W | 100-240VAC
50-60Hz | COB 3-step | incl. PS
phase-cut dim | aluminium
powder coated | opal glass lens

0.48kg IP65

	CODE
	180381W_
	180381A_
	180381Q_
	180381B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	580	>90	3
3000K	630	>90	5

2.0

LED 2x LED 10.5 W | 100-240VAC
50-60Hz | COB 3-step | incl. PS
phase-cut dim | aluminium
powder coated | opal glass lens

0.81kg IP65

	CODE
	180481W_
	180481A_
	180481Q_
	180481B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x425	>90	3
3000K	2x455	>90	5

Rev. 001/2021-06

back

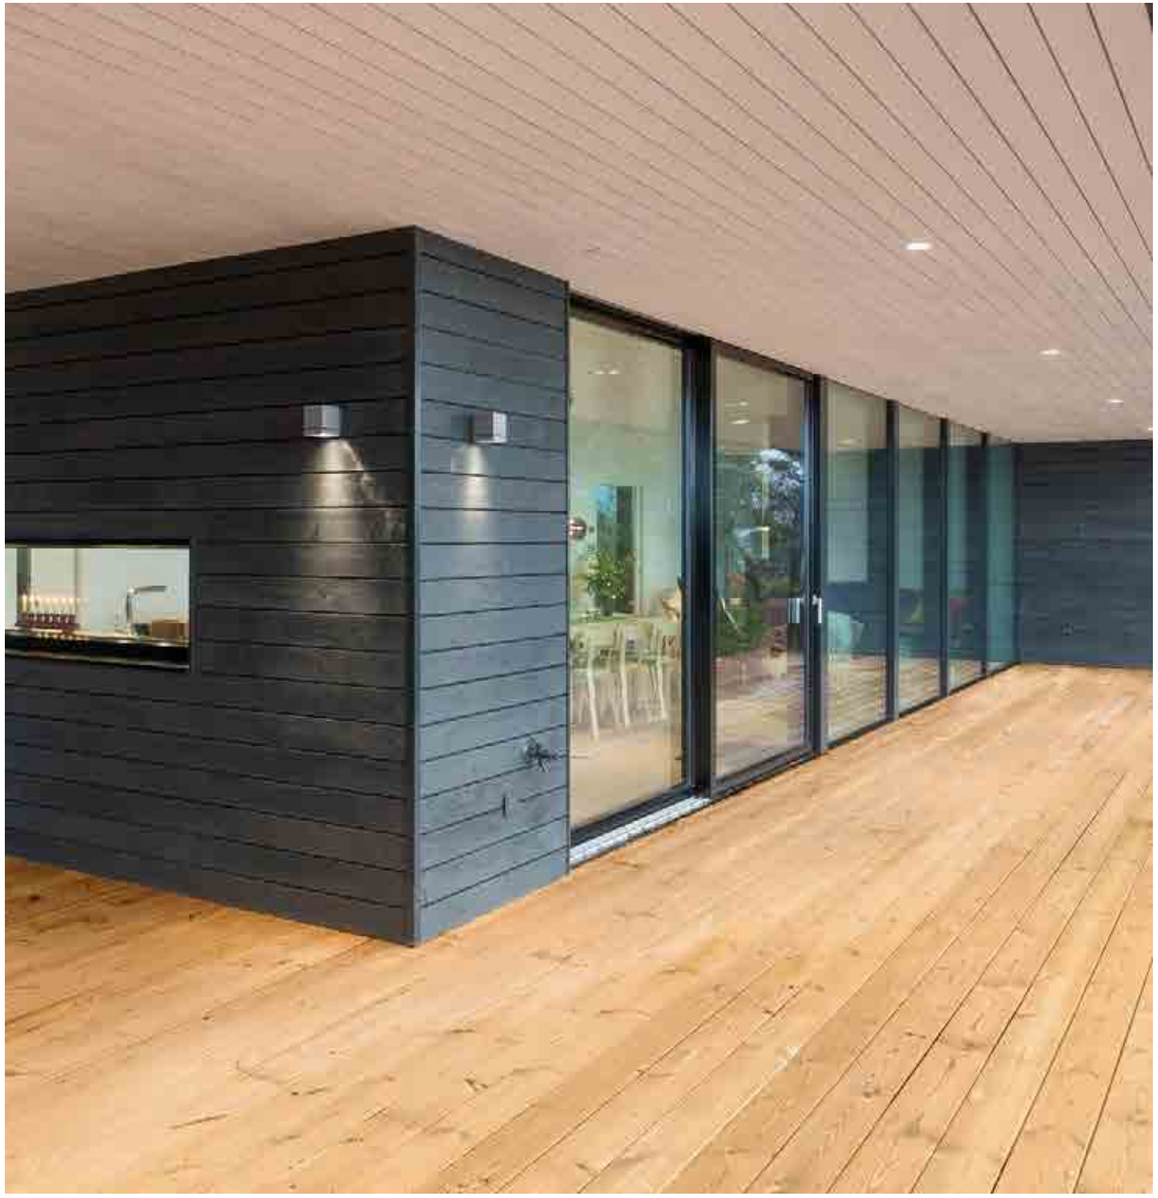

PRIVATE RESIDENCE | SIGGE ARCHITECTS, ANTTI KORPI I TECLUX OY + SIGGE ARCHITECTS, ANTTI KORPI FINLAND

TUBE CARRÉ

OUTDOOR
WALL SURFACE

p. 609





1.0 LED

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.66kg IP65 34°

	CODE
	744164W_
	744164D_
	744164A_
	744164B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	390	>90	5

1.0 PAR16

PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.71kg IP65

	CODE
	744120W0
	744120D0
	744120A0
	744120B0

OPTIONAL

PAR16 LED GU10 4.3W

	CODE
2700K	905227S2
3000K	905227S4

more specs on page 729

back

PRIVATE RESIDENCE | SPADO ARCHITECTS AUSTRIA

TUBE CARRÉ

OUTDOOR
WALL SURFACE

p. 609





2.0 LED

LED 2x LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.00kg IP65 34°

	CODE
	744264W_
	744264D_
	744264A_
	744264B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	2x390	>90	5

2.0 PAR16

2x PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

1.05kg IP65

	CODE
	744220W0
	744220D0
	744220A0
	744220B0

OPTIONAL

PAR16 LED GU10 4.3W

	CODE
2700K	905227S2
3000K	905227S4

more specs on page 729

back

PRIVATE RESIDENCE FRANCE

BOX

OUTDOOR
WALL SURFACE

p. 271 p. 427 p. 535 p. 611





1.0

LED 6W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
incl. flaps for adjustable beam angle

0.60kg IP65

	CODE
	740168W_
	740168A_
	740168Q_
	740168D_
	740168B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	400	>80	2
3000K	440	>80	4

2.0

LED 2x LED 3W | 220-240VAC | 50-60Hz
PCB 3-step| phase-cut dim
aluminium powder coated
incl. flaps for adjustable beam angle

0.66kg IP65

	CODE
	740148W_
	740148A_
	740148Q_
	740148D_
	740148B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x200	>80	2
3000K	2x220	>80	4

back

RENARKER MANCHESTER | UNITED KINGDOM

BOX

OUTDOOR
WALL SURFACE

p. 271 p. 427 p. 535 p. 611





3.0

LED 6W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
incl. flaps for adjustable beam angle

0.67kg IP65

	CODE
	740268W_
	740268Q_
	740268D_
	740268B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	400	>80	2
3000K	440	>80	4

4.0

LED 2x LED 3W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
incl. flaps for adjustable beam angle

0.86kg IP65

	CODE
	740248W_
	740248Q_
	740248D_
	740248B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x200	>80	2
3000K	2x220	>80	4

back

PRIVATE RESIDENCE | MOVING HOUSE | PILZARCHITEKTUR AUSTRIA

TRAIN

OUTDOOR
WALL SURFACE

p. 545



1.0 NARROW

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS
aluminium powder coated

0.24kg IP65 46°x5°

narrow up or narrow down

	CODE
	719143D_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	120	>80	4

2.0 NARROW

LED 2x LED 3W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS
aluminium powder coated

0.35kg IP65 46°x5°

narrow up | narrow down | 48 x 48 x 134

	CODE
	719243D_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	2x75	>80	4

narrow up | flood down | 48 x 48 x 127

	CODE
	719253D_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	80/200	>80	4

1.0

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
aluminium powder coated

0.24kg IP65 38°

	CODE
	719868W_
	719868D_
	719868B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	420	>90	5

2.0

LED 2x LED 4W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
aluminium powder coated

0.35kg IP65 38°

	CODE
	719968W_
	719968D_
	719968B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	2x255	>90	5

PASQUALE BRUNI
GLAMOUR

PRIVATE RESIDENCE UNITED KINGDOM

1.0

2.0

CENTRAL

OUTDOOR
WALL SURFACE

p. 547



1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.91kg IP65

	CODE
	313774W_
	313774D_
	313774A_
	313774B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	520	>90	5

2.0

LED 2x LED 4W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.91kg IP65

	CODE
	313874W_
	313874D_
	313874A_
	313874B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	2x290	>90	5

back

PRIVATE RESIDENCE AUSTRIA

STATION

OUTDOOR
WALL SURFACE

p. 549







1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.86kg IP65

	CODE
	314774D_
	314774B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	520	>90	5

2.0

2x LED 4W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.80kg IP65

	CODE
	314874D_
	314874B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	2x290	>90	5

back

PRIVATE RESIDENCE | REFUGE FRANCE

BOXX

OUTDOOR
WALL SURFACE



1.0

LED 2x 2xLED 3W | 220-240VAC 50-60Hz | PCB 3-step phase-cut dim | aluminium powder coated | incl. flaps for adjustable beam angle

0.93kg IP65

	CODE
	739148W_
	739148B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	2x400 | >80	2
3000K	2x440 | >80	4

back

SHOWROOM | CHILLOUT AREA GRAZ | AUSTRIA

X-BEAM

OUTDOOR
WALL SURFACE

p. 687



1.0

LED 17W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.28kg IP65

0,3-D 120° 0/110°

	CODE
	700364D_
	700364A_
	700364B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	1410	>80	4

OPTIONAL

	CODE
snoot	90019023

back

PRIVATE RESIDENCE SWEDEN

SMILE ON

OUTDOOR
WALL SURFACE



1.0

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | aluminium powder coated

0.43kg IP65

	CODE
	702257W_
	702257D_
	702257B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	300	>90	5

2.0

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | aluminium powder coated

0.65kg IP65

	CODE
	703257W_
	703257D_
	703257B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	300	>90	5

back

PRIVATE RESIDENCE AUSTRIA

TAPE

OUTDOOR
WALL SURFACE



1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.73kg IP65

	CODE
	722174W_
	722174D_
	722174A_
	722174B_

LIGHT COLOUR	LUMEN | CRI	CODE
3000K	420 | >90	5

back

JEFFREY PLACE | TASOU ARCHITECTS LONDON | UNITED KINGDOM

SWAM

OUTDOOR
WALL SURFACE

p. 689





1.0

LED 8W | 220-240VAC
PCB 3-step | phase-cut dim
aluminium powder coated

0.95kg IP65 P

	CODE
	746274K_
	746274B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	210	>90	3

1.1

LED 13W | 220-240VAC
PCB 3-step | phase-cut dim
aluminium powder coated

0.95kg IP65 P

	CODE
	746374K_
	746374B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	350	>90	3

PRIVATE RESIDENCE AUSTRIA

GETTON

OUTDOOR
WALL SURFACE

p. 691





1.0

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated
opal glass

0.83kg IP65

	CODE
	717474W_
	717474D_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	720	>80	4

OPTIONAL

big cover

	CODE
	911141W1
	911141D1

more accessories on page 744

2.0

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated
clear glass

0.83kg IP65

	CODE
	717374W_
	717374D_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	755	>80	4

OPTIONAL

big cover

	CODE
	911141W1
	911141D1

more accessories on page 744

back

PRIVATE RESIDENCE | BAUBUREAU OG 27 | LINEAR 54 SWITZERLAND

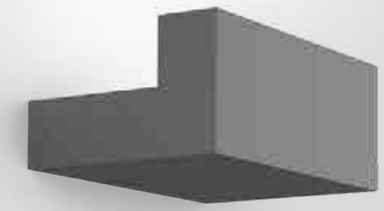

available from summer 2021

PALOS

OUTDOOR
WALL SURFACE

p. 701







1.0

LED 9.5W | 100-240VAC
50-60Hz | COB 3-step | incl. PS
phase-cut dim | aluminium
powder coated

0.86kg IP65

	CODE
	416174A_
	416174Q_
	416174B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	480	>80	2
3000K	520	>80	4

2.0

2x LED 9.5W | 100-240VAC
50-60Hz | COB 3-step | incl. PS
phase-cut dim | aluminium
powder coated

1.10kg IP65

	CODE
	416274A_
	416274Q_
	416274B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x470	>80	2
3000K	2x505	>80	4

3.0

LED 9.5W | 100-240VAC
50-60Hz | COB 3-step | incl. PS
phase-cut dim | aluminium
powder coated

0.98kg IP65

	CODE
	416374A_
	416374Q_
	416374B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	620	>80	2
3000K	670	>80	4

back

FLOOR RECESSED

p. 669 — 679

FLOOR RECESSED

CARD 0.1
p. 671

CARD 0.2
p. 671

MAP
p. 673

MAP ASYM
p. 675



CHART
p. 677

CHART ASYM
p. 679

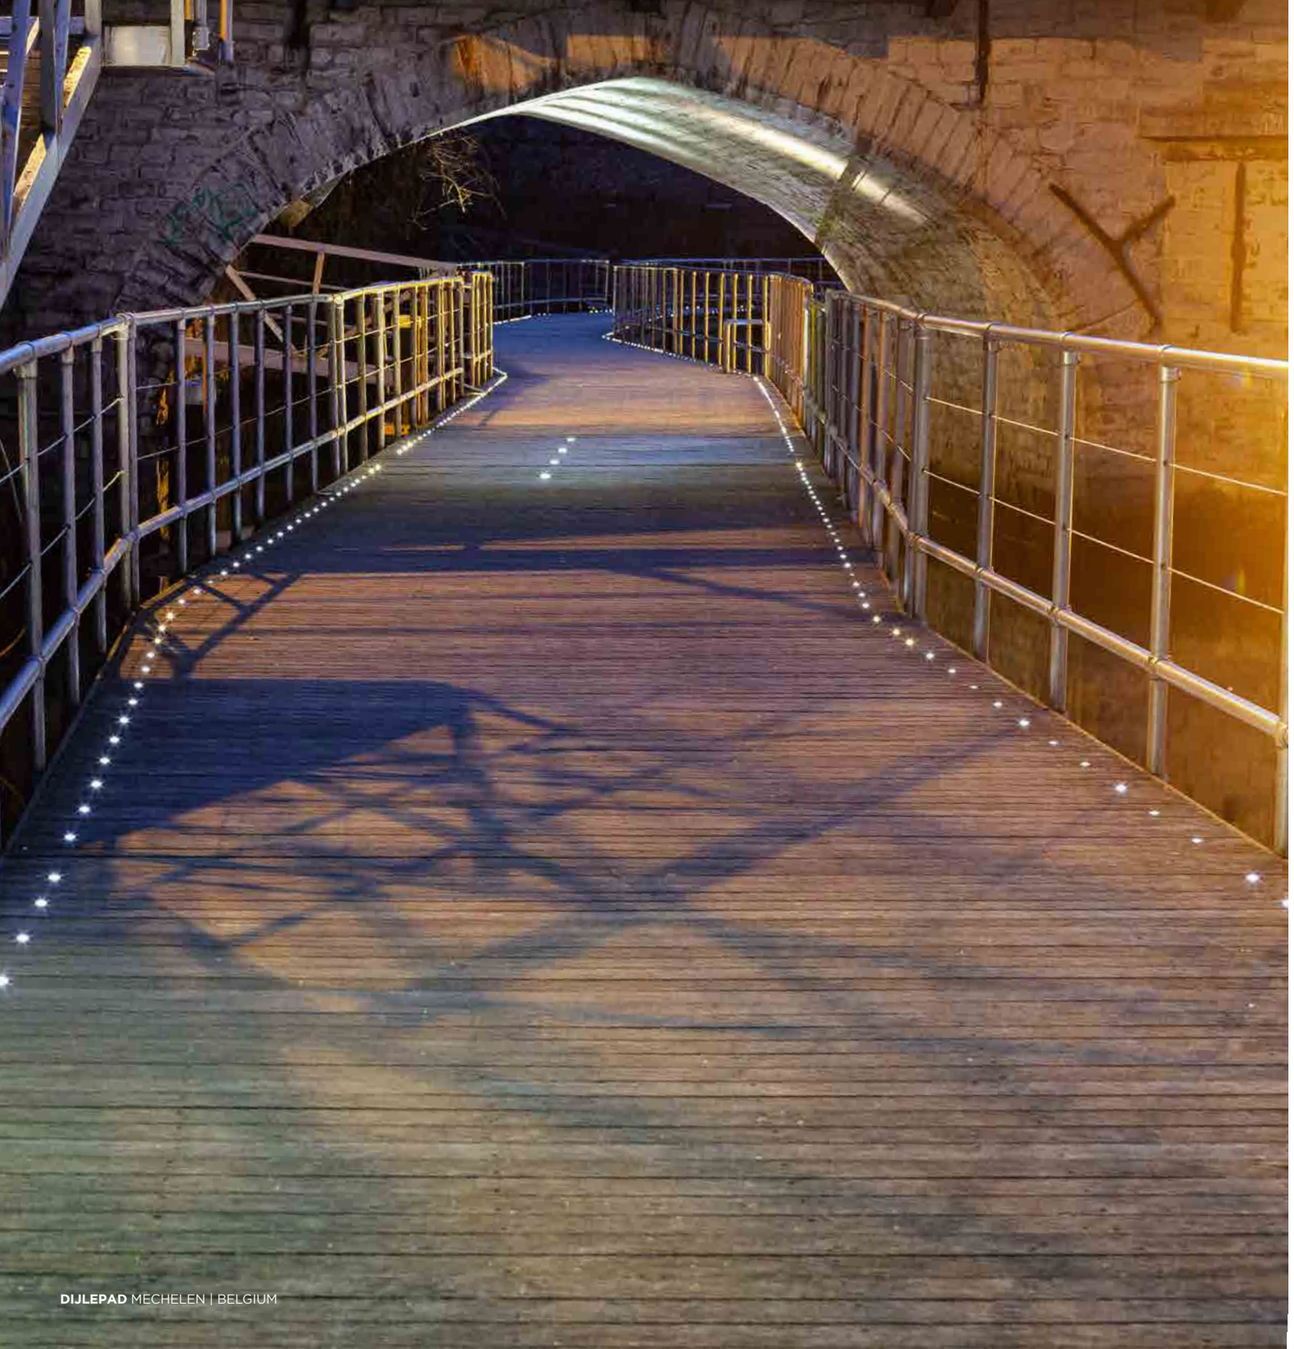

DIJLEPAD MECHELEN | BELGIUM

CARD

OUTDOOR
FLOOR RECESSED

0.1

LED 1W | 350mA | 3Vf
PCB 3-step | excl. power supply
stainless steel | glass | 0.9m cable
aluminium powder coated

0.05kg IP67 IK07 0,3

16° 22-24 60

	CODE
	750161I

LIGHT COLOUR	LUMEN | CRI	CODE
3000K	70 | >80	4

ALWAYS USE

power supply IP66

	CODE
350mA | 3W	90213101

0.2

LED 1W | 350mA | 3Vf
PCB 3-step | excl. power supply
stainless steel | glass | 0.9m cable
aluminium powder coated

0.06kg IP67 IK07 0,3

16° 22-24 60

	CODE
	750261I

LIGHT COLOUR	LUMEN | CRI	CODE
3000K	70 | >80	4

ALWAYS USE

power supply IP66

	CODE
350mA | 3W	90213101

back

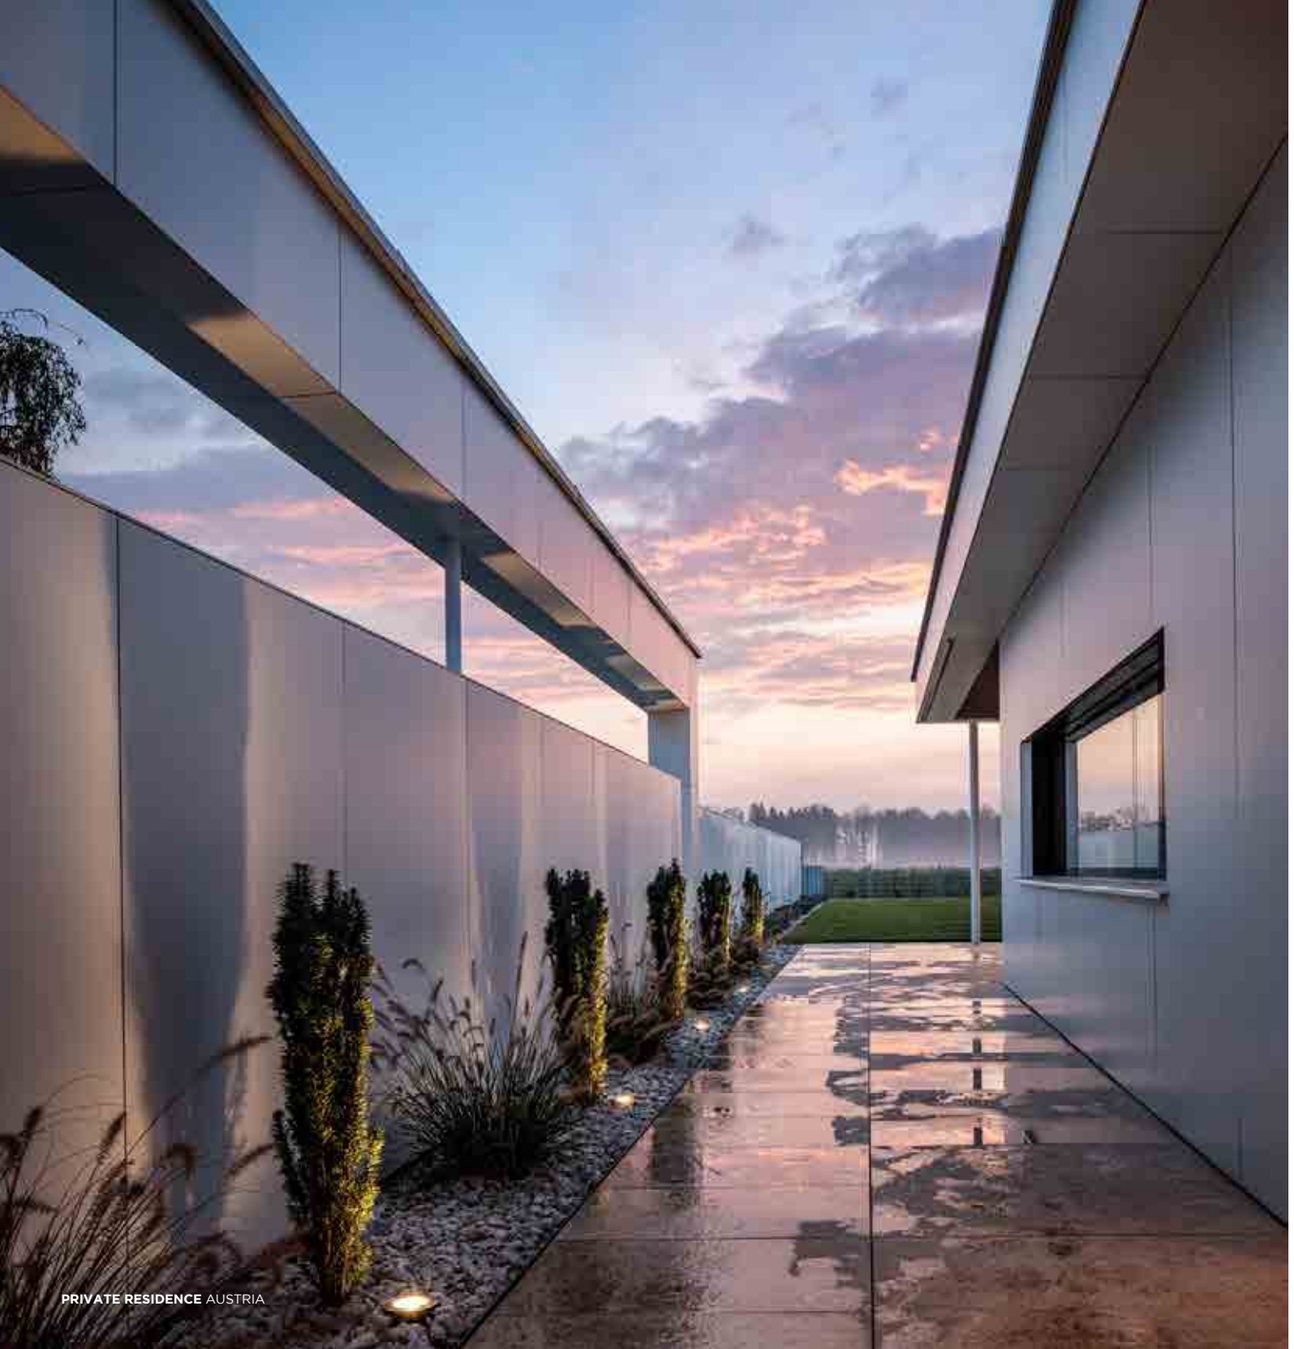

PRIVATE RESIDENCE AUSTRIA

MAP

OUTDOOR
FLOOR RECESSED





0.6

LED 5W | 220-240VAC | 50-60Hz
COB 3-step | stainless steel | glass
1.6m cable | aluminium powder coated

0.38kg IP67 IK08 1-0,3-10 TG

38° 100

	CODE
	751163L

LIGHT COLOUR	LUMEN | CRI	CODE
3000K	290 | >80	4

OPTIONAL

	CODE
ground housing	90012201

0.9

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
stainless steel | glass | 1.6m cable
aluminium powder coated

0.70kg IP67 IK08 1-0,3-10

TG 38° 135

	CODE
	751264L

LIGHT COLOUR	LUMEN | CRI	CODE
3000K	470 | >80	4

OPTIONAL

	CODE
ground housing	90012202

1.2

LED 12W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
stainless steel | glass | 1.6m cable
aluminium powder coated

1.01kg IP67 IK08 1-0,3-10

TG 38° 120

	CODE
	751364L

LIGHT COLOUR	LUMEN | CRI	CODE
3000K	815 | >80	4

OPTIONAL

	CODE
ground housing	90012203

1.6

LED 15W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
stainless steel | glass | 1.6m cable
aluminium powder coated

1.01kg IP67 IK09 1-0,3-10

TG 41° 185

	CODE
	751464L

LIGHT COLOUR	LUMEN | CRI	CODE
3000K	1030 | >80	4

OPTIONAL

	CODE
ground housing	90012204

back

PRIVATE RESIDENCE OBUMEX – STEENOVEN BELGIUM

MAP ASYM

OUTDOOR
FLOOR RECESSED



1.2

LED 10W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
stainless steel | glass | 1.6m cable
aluminium powder coated

1.06kg IP67 IK08 0,3

160

asymmetric reflector

	CODE
	751557I_

LIGHT COLOUR	LUMEN | CRI	CODE
3000K	450 | >80	4

OPTIONAL

	CODE
ground housing	90012203

1.6

LED 15W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
stainless steel | glass | 1.6m cable
aluminium powder coated

1.72kg IP67 IK09 0,3

185

asymmetric reflector

	CODE
	751657I_

LIGHT COLOUR	LUMEN | CRI	CODE
3000K	690 | >80	4

OPTIONAL

	CODE
ground housing	90012204

back

PRIVATE RESIDENCE FRANCE

CHART

OUTDOOR
FLOOR RECESSED









0.6

LED 5W | 220-240VAC | 50-60Hz
COB 3-step | stainless steel | glass
1.6m cable | aluminium powder coated

0.39kg IP67 IK08 TG

38° 118

	CODE
	752163L

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	290	>80	4

OPTIONAL

	CODE
ground housing	90012201

0.9

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
stainless steel | glass | 1.6m cable
aluminium powder coated

0.70kg IP67 IK08 TG

38° 135

	CODE
	752264L

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	470	>80	4

OPTIONAL

	CODE
ground housing	90012202

1.2

LED 12W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
stainless steel | glass | 1.6m cable
aluminium powder coated

1.05kg IP67 IK08 TG

38° 175

	CODE
	752364L

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	815	>80	4

OPTIONAL

	CODE
ground housing	90012203

1.6

LED 15W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
stainless steel | glass | 1.6m cable
aluminium powder coated

1.05kg IP67 IK09 TG

41° 185

	CODE
	752464L

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	1030	>80	4

OPTIONAL

	CODE
ground housing	90012204

back

CHART ASYM

OUTDOOR
FLOOR RECESSED



1.2

LED 10W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
stainless steel | glass | 1.6m cable
aluminium powder coated

1.10kg IP67 IK08 0,3-

160

asymmetric reflector

	CODE
	752557I_

LIGHT COLOUR	LUMEN | CRI	CODE
3000K	450 | >80	4

OPTIONAL

	CODE
ground housing	90012203

1.6

LED 15W | 220-240VAC | 50-60Hz
COB 3-step | phase-cut dim
stainless steel | glass | 1.6m cable
aluminium powder coated

1.83kg IP67 IK09 0,3-

185

asymmetric reflector

	CODE
	752657I_

LIGHT COLOUR	LUMEN | CRI	CODE
3000K	690 | >80	4

OPTIONAL

	CODE
ground housing	90012204

back

FLOOR SURFACE

p. 681 — 713

FLOOR SURFACE PROJECTOR

STIPO 1.0
p. 683

STIPO 4.0
p. 683

STAKE FOLD
p. 685

STAKE
p. 685



X-BEAM
p. 687

FLOOR SURFACE BOLLARD

SWAM
p. 689

GETTON
p. 691

TAPE
p. 693

PACE
p. 695

FIFTY FIFTY
p. 697

SWAY
p. 699

PALOS ROUND 1.0
p. 701

PALOS CARRÉ 2.0
p. 703

LINUS
p. 705

PALLUZ C
p. 707

FLOOR SURFACE LUMINAIRES

COSTA 1.0
p. 709

COSTA 2.0
p. 711

SHOWROOM | CHILLOUT AREA GRAZ | AUSTRIA

STIPO

OUTDOOR
FLOOR PROJECTOR



1.0

LED 7W | 220-240VAC | 50/60Hz
COB 3-step | aluminium powder coated | 2.0m cable

0.50 kg | IP65 | 0.3-step | 38° | 135°

	CODE
	737157D_
	737157Y_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	460	>80	4

OPTIONAL

	CODE
ground spike	90013106



2.0

LED 7W | 220-240VAC | 50/60Hz
COB 3-step | aluminium powder coated | 2.0m cable

0.49 kg | IP65 | 0.3-step | 38° | 135°

	CODE
	737267D_
	737267Y_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	460	>80	4

OPTIONAL

	CODE
ground spike	90013106



3.0

LED 7W | 220-240VAC | 50/60Hz
COB 3-step | aluminium powder coated | 2.0m cable

0.50kg | IP65 | 0.3-step | 38° | 135°

	CODE
	737357D_
	737357Y_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	460	>80	4

ALWAYS USE

pole excl. spike

	CODE
base 200	910062_0
base 400	910064_0
base 600	910066_0
base 800	910068_0

base colour

	CODE
	D
	Y

OPTIONAL

	CODE
ground spike	90013106



4.0

LED 7W | 220-240VAC | 50/60Hz
COB 3-step | aluminium powder coated | 2.0m cable

0.49 kg | IP65 | 0.3-step | 38° | 135°

	CODE
	737467D_
	737467Y_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	460	>80	4

ALWAYS USE

pole excl. spike

	CODE
base 200	910062_0
base 400	910064_0
base 600	910066_0
base 800	910068_0

base colour

	CODE
	D
	Y

OPTIONAL

	CODE
ground spike	90013106

back

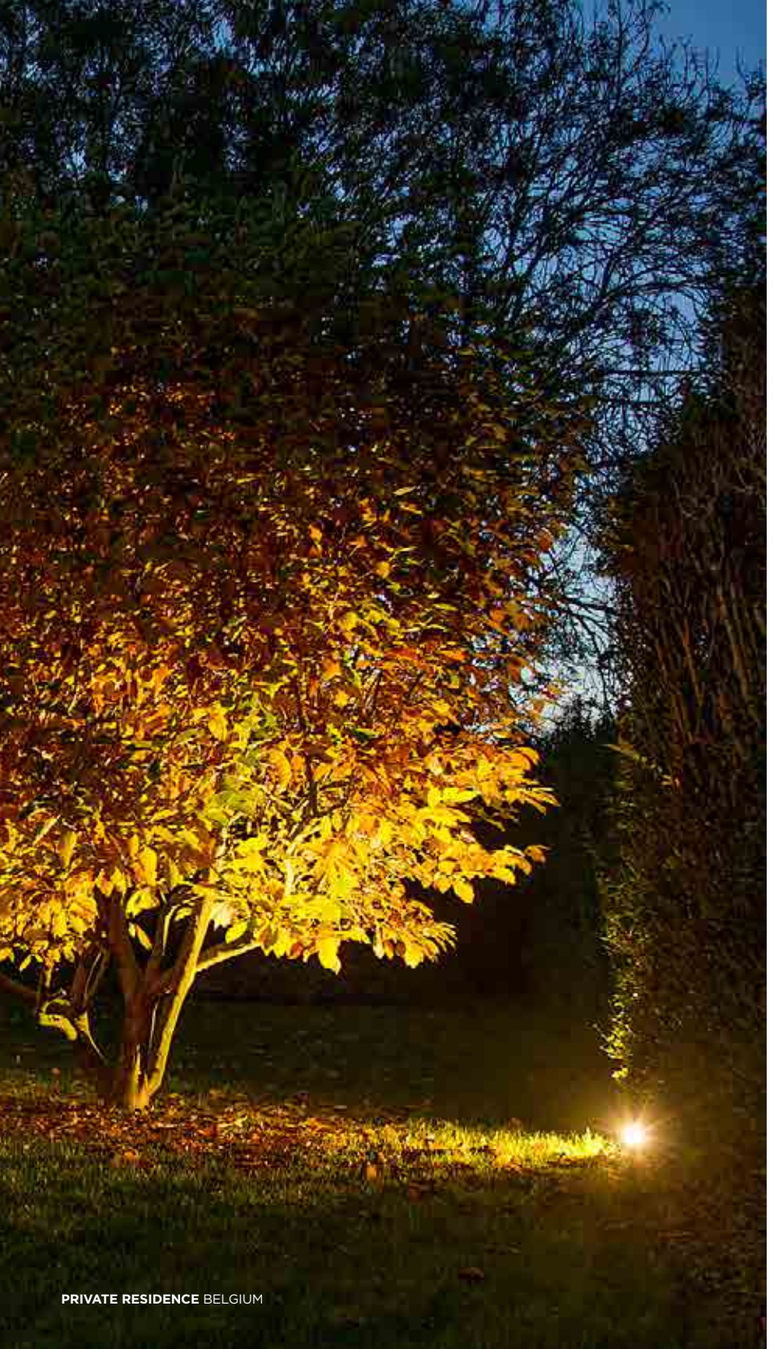

PRIVATE RESIDENCE BELGIUM

STAKE | STAKE FOLD

OUTDOOR
FLOOR PROJECTOR



1.0 STAKE

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
1.0m cable

0.55kg IP65 0/90°

	CODE
	727174D_
	727174A_
	727174B_

LIGHT COLOUR	LUMEN | CRI	CODE
3000K	460 | >90	5

OPTIONAL

	CODE
ground spike	90013106
snoot	90019004

1.0 STAKE FOLD

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
1.0m cable

0.78kg IP65 0/90°

	CODE
	727274D_
	727274A_
	727274B_

LIGHT COLOUR	LUMEN | CRI	CODE
3000K	460 | >90	5

OPTIONAL

	CODE
ground spike	90013107
snoot	90019004

back

PRIVATE RESIDENCE BELGIUM

X-BEAM

OUTDOOR
FLOOR PROJECTOR

p. 657



1.0

LED 17W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.28kg IP65

0.3-D G 120° 0/110°

	CODE
	700364D_
	700364A_
	700364B_

LIGHT COLOUR	LUMEN | CRI	CODE
3000K	1410 | >80	4

OPTIONAL

	CODE
ground spike	90013115
snoot	90019023

back

PRIVATE RESIDENCE BELGIUM

SWAM

OUTDOOR
FLOOR SURFACE

p. 663

1.0

LED 8W | 220-240VAC
PCB 3-step | phase-cut dim
aluminium powder coated
2.0m cable

0.85kg IP65

	CODE
	746174K_
	746174B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	170 | >90	3

OPTIONAL

ground fixation plate

	CODE
	90019019



ALWAYS USE

straight base in black

	CODE
base 400	910090B0
base 600	910091B0
base 800	910092B0



ALWAYS USE

curved base in black

	CODE
base 400	910093B0
base 600	910094B0
base 800	910095B0

back

RETIREMENT HOME SUNNEMATTE | ARCHITECT SCHÖPFER + WIDMER BAUPLANUNG | T&P TROXLER&PARTNER AG
ESCHOLZMATT | SWITZERLAND

GETTON

OUTDOOR
FLOOR SURFACE

p. 665

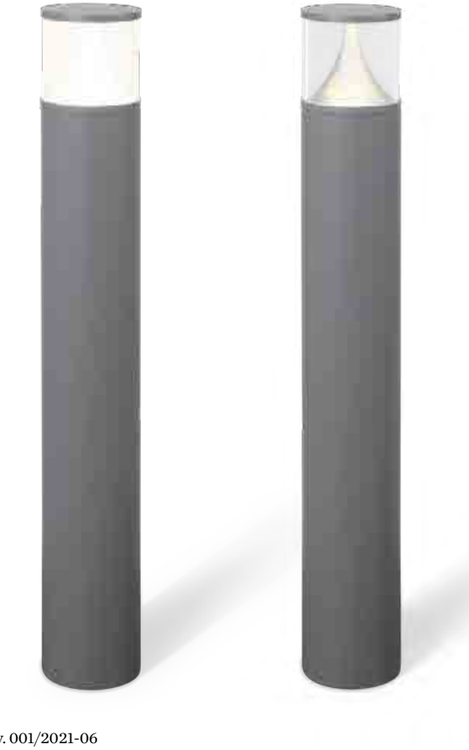



1.0

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.80kg IP65

opal glass

	CODE
	717574D_

LIGHT COLOUR	LUMEN | CRI	CODE
3000K	720 | >80	4

ALWAYS USE

	CODE
base 275	910052D0
base 475	910054D0
base 675	910058D0

OPTIONAL

	CODE
ground spike	90013101



2.0

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.80kg IP65

clear glass

	CODE
	717674D_

LIGHT COLOUR	LUMEN | CRI	CODE
3000K	755 | >80	4

ALWAYS USE

	CODE
base 275	910052D0
base 475	910054D0
base 675	910058D0

OPTIONAL

	CODE
ground spike	90013101

Rev. 001/2021-06

back

STYRIA MEDIA CENTER | ARCHITEKTUR CONSULT ZT | LICHTPLANER VEDDER GRAZ | AUSTRIA

TAPE

OUTDOOR
FLOOR SURFACE



4.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.92kg IP65

	CODE
	722274W_
	722274D_

LIGHT COLOUR	LUMEN | CRI	CODE
3000K	420 | >90	5

OPTIONAL

	CODE
ground spike	90013102



6.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

2.60kg IP65

	CODE
	722374W_
	722374D_

LIGHT COLOUR	LUMEN | CRI	CODE
3000K	420 | >90	5

OPTIONAL

	CODE
ground spike	90013102



8.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

3.10kg IP65

	CODE
	722474W_
	722474D_

LIGHT COLOUR	LUMEN | CRI	CODE
3000K	420 | >90	5

OPTIONAL

	CODE
ground spike	90013102

back

PRIVATE RESIDENCE | SPADO ARCHITECTS AUSTRIA

PACE

OUTDOOR
FLOOR SURFACE



4.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
0.35m cable

1.00kg IP65

	CODE
	723174D_
	723174B_

LIGHT COLOUR	LUMEN | CRI	CODE
3000K	420 | >90	5

OPTIONAL

	CODE
ground spike	90013102



6.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
0.35m cable

1.33kg IP65

	CODE
	723274D_
	723274B_

LIGHT COLOUR	LUMEN | CRI	CODE
3000K	420 | >90	5

OPTIONAL

	CODE
ground spike	90013102

8.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
0.35m cable

1.61kg IP65

	CODE
	723374D_
	723374B_

LIGHT COLOUR	LUMEN | CRI	CODE
3000K	420 | >90	5

OPTIONAL

	CODE
ground spike	90013102

back

PRIVATE RESIDENCE | KILLIAN GARTNER | ROOMS ATELIER AUSTRIA

FIFTY FIFTY

OUTDOOR
FLOOR SURFACE

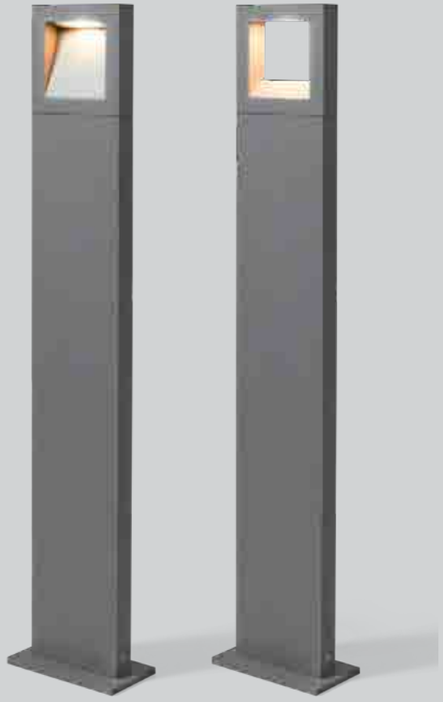



1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
1.3m cable

1.20kg IP65

	CODE
	756174D_
	756174A_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	360	>80	4



2.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
1.3m cable

0.98kg IP65

	CODE
	756274D_
	756274A_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	390	>80	4



ALWAYS USE

base with fixation plate

	CODE
base 170	910013_0
base 270	910014_0
base 470	910016_0
base 670	910018_0
base 870	910010_0

base colour

	CODE
	D
	A



ALWAYS USE

base with concrete fixation

	CODE
base 170	910073_0
base 270	910074_0
base 470	910076_0
base 670	910078_0
base 870	910070_0

base colour

	CODE
	D
	A

back

RENAKER MANCHESTER | UNITED KINGDOM

SWAY

OUTDOOR
FLOOR SURFACE

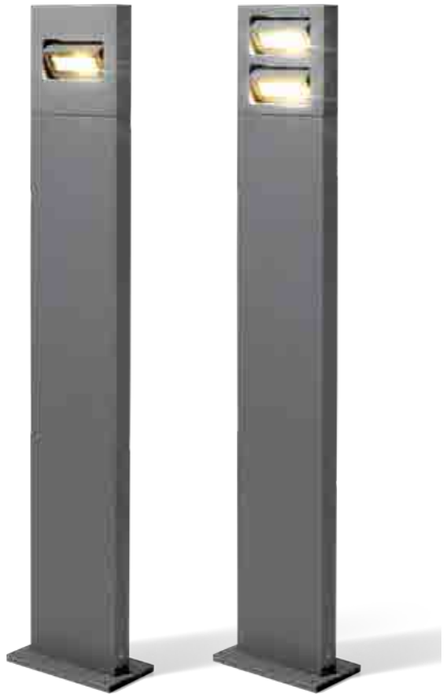



1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
1.3m cable

1.01kg IP54 0,3 6

140°/140°

	CODE
	720174D_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	560	>80	4



2.0

2x LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
1.3m cable

1.10kg IP54 0,3 6

140°/140°

	CODE
	720274D_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	2x560	>80	4



ALWAYS USE

base with fixation plate

	CODE
base 170	910013_0
base 270	910014_0
base 470	910016_0
base 670	910018_0
base 870	910010_0

base colour

	CODE
	D



ALWAYS USE

base with concrete fixation

	CODE
base 170	910073_0
base 270	910074_0
base 470	910076_0
base 670	910078_0
base 870	910070_0

base colour

	CODE
	D

back

PRIVATE RESIDENCE BELGIUM

PALOS ROUND

OUTDOOR
FLOOR SURFACE

p. 667

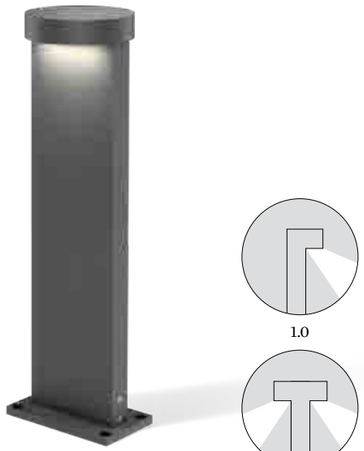

1.0

2.0

available from summer 2021

1.0

LED 9.5W | 100-240VAC
50-60Hz | COB 3-step | incl. PS
phase-cut dim | aluminium
powder coated | 1.3m cable

0.73kg IP65

	CODE
	416674A_
	416674Q_
	416674B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	540 | >80	2
3000K	580 | >80	4



2.0

LED 2x LED 9.5W | 100-240VAC
50-60Hz | COB 3-step | incl. PS
phase-cut dim | aluminium
powder coated | 1.3m cable

1.01kg IP65

	CODE
	416774A_
	416774Q_
	416774B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	2x550 | >80	2
3000K	2x590 | >80	4



ALWAYS USE

base with fixation plate

	CODE
base 170	910013_0
base 270	910014_0
base 470	910016_0
base 670	910018_0
base 870	910010_0

base colour

	CODE
	A
	Q
	B



ALWAYS USE

base with concrete fixation

	CODE
base 170	910073_0
base 270	910074_0
base 470	910076_0
base 670	910078_0
base 870	910070_0

base colour

	CODE
	A
	Q
	B

back

PRIVATE RESIDENCE AUSTRIA

PALOS CARRÉ

OUTDOOR
FLOOR SURFACE

p. 667

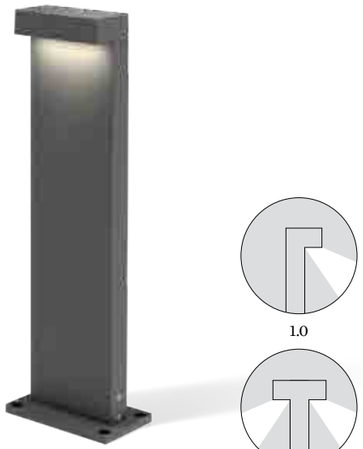

available from summer 2021

2.0

1.0

LED 9.5W | 100-240VAC
50-60Hz | COB 3-step | incl. PS
phase-cut dim | aluminium
powder coated | 1.3m cable

0.68kg IP65

	CODE
	416474A_
	416474Q_
	416474B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	540 | >80	2
3000K	580 | >80	4



2.0

LED 2x LED 9.5W | 100-240VAC
50-60Hz | COB 3-step | incl. PS
phase-cut dim | aluminium
powder coated | 1.3m cable

0.94kg IP65

	CODE
	416574A_
	416574Q_
	416574B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	2x550 | >80	2
3000K	2x590 | >80	4



ALWAYS USE

base with fixation plate

	CODE
base 170	910013_0
base 270	910014_0
base 470	910016_0
base 670	910018_0
base 870	910010_0

base colour

	CODE
	A
	Q
	B



ALWAYS USE

base with concrete fixation

	CODE
base 170	910073_0
base 270	910074_0
base 470	910076_0
base 670	910078_0
base 870	910070_0

base colour

	CODE
	A
	Q
	B

back

PANORAMA.URBANIZACIÓN PRIVADA MADRID | SPAIN

LINUS

OUTDOOR
FLOOR SURFACE



1.0

LED 7W | 220-240VAC | 50-60Hz
COB 3-step | aluminium powder coated

0.95kg IP65 0,3+ 6

	CODE
	726173D_
	726173Y_
	726173A_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	230	>80	4



2.0

LED 7W | 220-240VAC | 50-60Hz
COB 3-step | aluminium powder coated | PMMA diffuser

0.99kg IP65 0,3+ P

	CODE
	726273D_
	726273Y_
	726273A_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	235	>80	4



3.0

LED 7W | 220-240VAC | 50-60Hz
COB 3-step | aluminium powder coated

0.52kg IP65 0,3+ 6

	CODE
	726373D_
	726373Y_
	726373A_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	230	>80	4

ALWAYS USE

base

	CODE
base 150	910024_0
base 350	910026_0
base 550	910028_0

base colour

	CODE
	D
	Y
	A

OPTIONAL

	CODE
ground spike	90013103
ground fixation	90013302

back

PRIVATE RESIDENCE SWEDEN

PALLUZ C

OUTDOOR
FLOOR SURFACE

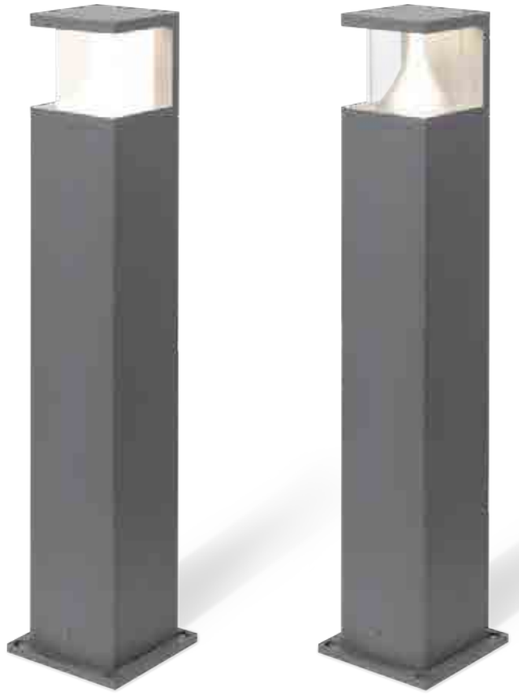



1.0

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated
1.5m cable

1.30kg IP65

opal glass

	CODE
	724374D_

LIGHT COLOUR	LUMEN | CRI	CODE
3000K	500 | >80	4

ALWAYS USE

	CODE
base 100	910033D0
base 470	910036D0
base 670	910038D0
invisible fixation base 90	910032D0

OPTIONAL

	CODE
ground spike for invisible base 90	90013104
ground fixation for base 100 | 470 | 670	90013303



2.0

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated
1.5m cable

1.30kg IP65

clear glass

	CODE
	724474D_

LIGHT COLOUR	LUMEN | CRI	CODE
3000K	550 | >80	4

ALWAYS USE

	CODE
base 100	910033D0
base 470	910036D0
base 670	910038D0
invisible fixation base 90	910032D0

OPTIONAL

	CODE
ground spike for invisible base 90	90013104
ground fixation for base 100 | 470 | 670	90013303

Rev. 001/2021-06

back

COSTA

OUTDOOR
FLOOR SURFACE

PRIVATE RESIDENCE | FIPE ARCHITECTS AUSTRIA

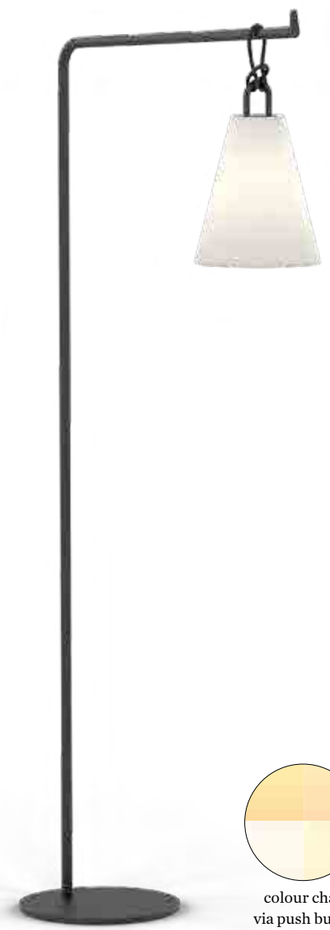

colour change
via push button



1.0 LED

2x LED channels 1.5W | 130lm
110-220VAC | 2200-4000K
rechargeable li-ion battery
incl. charger | light for 8 hours
recharging time 5 hours
polyethylene | polypropylene

0.90kg IP65

handle colour

	CODE
	865186YE9
	865186OR9
	865186SB9
	8651860B9

OPTIONAL

1.0 rope

	CODE
	90057171
	90057170

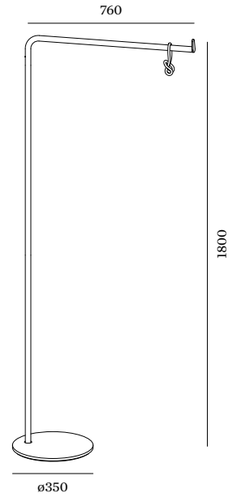

OPTIONAL

pole

	CODE
	90056001

back

HOTEL YURBBAN BARCELONA | SPAIN

colour change
via push button

COSTA

OUTDOOR
FLOOR SURFACE

DESIGN AWARD 2019



2.0 LED

2x LED channels 1.5W | 130lm
110-220VAC | 2200-4000K
rechargeable li-ion battery
incl. charger | light for 8 hours
recharging time 5 hours
polyethylene | polypropylene

1.10kg IP65

handle colour

CODE
865286YE9
865286OR9
865286SB9
8652860B9

OPTIONAL

2.0 rope

CODE
90057192
90057191
90057193
90057190

OPTIONAL

2.1 cage

CODE
90057182
90057181
90057183
90057180

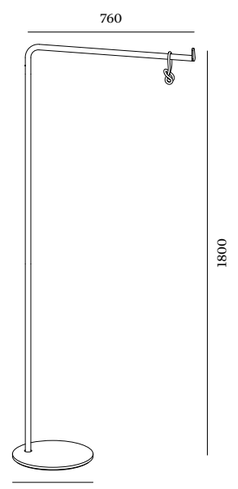

OPTIONAL

pole

CODE
90056001

back

FALKENSTEINER HOTEL ZADAR | CROATIA

back

TECHNICAL

IF YOU ARE WEARING RED, SHAKE YOUR HEAD

CRI 80+

AREA OF APPLICATION

Offices and restaurants
for average use

ANWENDUNGSBEREICH

Büro und Restaurants mit durchschnittlichen Anwendungen

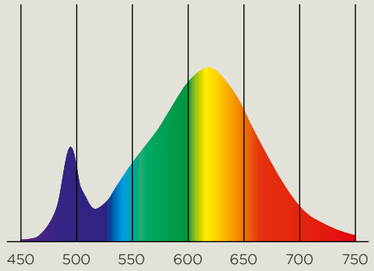

Wavelength (nm) / *Wellenlänge (nm)*

CRI 90+

AREA OF APPLICATION

Private homes, offices,
and sales areas

ANWENDUNGSBEREICH

Privaträume, Büros und Verkaufsbereiche

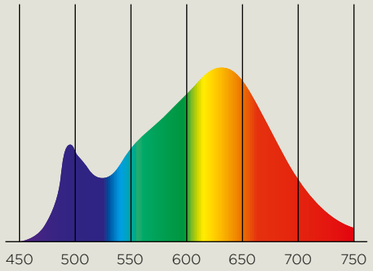

Wavelength (nm) / *Wellenlänge (nm)*



CRI 95+

AREA OF APPLICATION

Museums, galleries, fine dining,
and exclusive products in stores

ANWENDUNGSBEREICH

Museen, Gallerien, exquisites Essen und Qualitätsprodukte in Shops

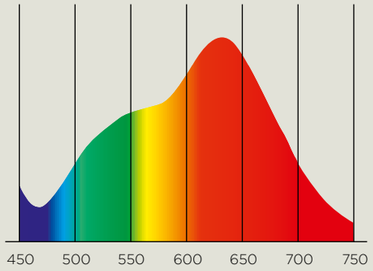

Wavelength (nm) / *Wellenlänge (nm)*

Why do our LEDs put things in the best light? Because they have a colour rendering index above 80. You're probably thinking "Okay...". But what exactly does that mean? The colour rendering index, the CRI, measures the ability of an artificial light to accurately reproduce colours. The higher this value – and 100 CRI would be possible in theory – the more natural and appealing objects look in your home. So your bright red sofa will finally get the attention it deserves!

Warum unsere LEDs die Dinge ins rechte Licht rücken? Weil sie einen Farbwiedergabewert von mindestens >80 haben. Aha, werden Sie sich jetzt denken. Aber was genau bedeutet das? Nun, der Farbwiedergabewert – oder CRI Index – zeigt an, in welcher Qualität Farben von einer künstlichen Lichtquelle wiedergegeben werden. Je höher also dieser Wert ist – theoretisch wären 100 CRI möglich - desto natürlicher und schöner sehen die Objekte in Ihrem Zuhause aus. So bekommt Ihr knallrotes Sofa endlich die Aufmerksamkeit, die es verdient!

TURN THE LIGHTS DOWN LOW

DIMMING

OH, HOW ROMANTIC

What sets a romantic mood faster than tea lights? That's right – our selection of dimming variants that easily control the light intensity. Not just with analogue dimming, but also digitally or via local building automation. DALI lets you group different luminaires together. You can dim them separately and even set lighting moods in advance. You're renovating and don't want to change the wiring? Then adjusting the light level via phase-cut dim is the perfect solution for you. All you need is standard wiring with a three-pin cable. Want an even more precise result? Connect a converter between 1-10 volts to adjust the current. Don't forget to get two more cables and keep an eye on the correct polarity. Or keep things completely care-free and cable-free via Bluetooth. Simply install the Bluetooth dimmer, download the app and off you go.

OH, WIE ROMANTISCH

Was sorgt schneller für romantische Stimmung als eine Packung Teelichter? Richtig. Unsere verschiedenen Dimming-Varianten, mit denen sich die Lichtintensität ganz einfach steuern lässt. Und das nicht nur analog, sondern auch digital oder über die lokale Gebäudeautomatisierung. So kann man mit DALI verschiedene Leuchten gruppieren, separat dimmen und sogar Lichtstimmungen vorab einstellen. Ganz easy vom iPad oder iPhone aus. Sie sind gerade in der Renovierungsphase und möchten die Verkabelung nicht ändern? Dann ist der analoge Phasenabschnittsdimmer phase-cut dim die perfekte Lösung für Sie. Alles, was Sie dafür brachen ist eine normale Verkabelung mit einem 3-poligen Kabel. Sie möchten ein noch präziseres Ergebnis? Dann können Sie bei 1-10 Volt einen Konverter dazwischenschalten, mit dem die Stromstärke angepasst wird. Wichtig dabei: Zwei weitere Kabel besorgen und die richtige Polarität im Auge behalten. Oder komplett sorgen- und kabelfrei via Bluetooth. Hier einfach den Bluetooth Dimmer einbauen, die App downloaden und schon geht's los.

PHASE-CUT DIM

Triac (Analogue)



1-10V DIM

Analogue



DALI DIM

Digital



BLUETOOTH

Digital



more specs on page 728

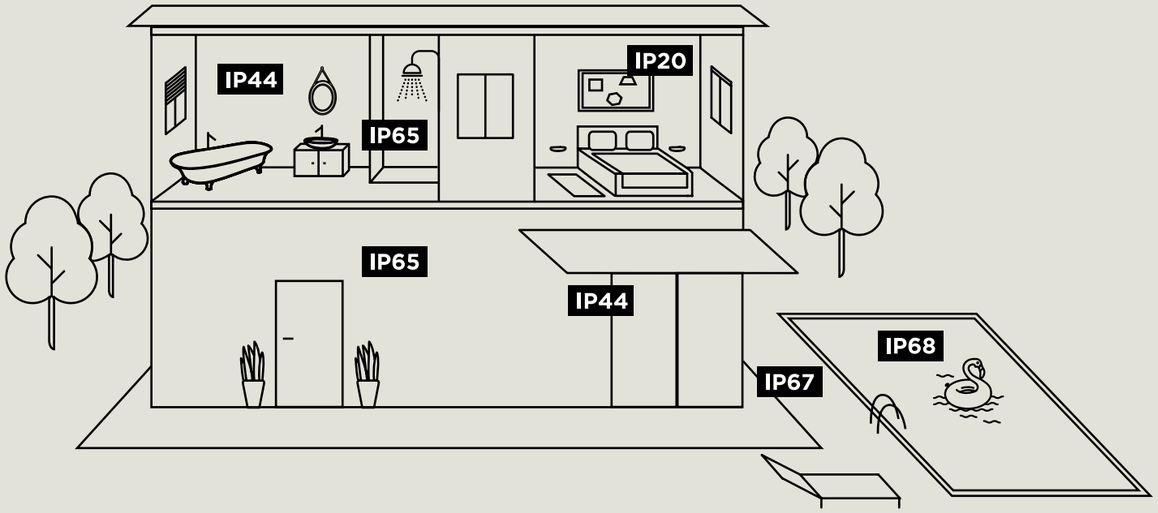

GENERAL INFORMATION

We advise having the lighting devices installed by a qualified electrician only. If the area is cleaned with water jets, then a minimum of IP65 is required.

ALLGEMEINER HINWEIS

Wir empfehlen, die Leuchtkörper nur von einem Elektrofachmann installieren zu lassen. Bei Wasserstrahlreinigung der Umgebung mindestens Wasserschutzklasse IP65 wählen.

IP RATING

FIRST DIGIT

Protection against solids

Schutz gegen Festkörper

0 No protection
Kein Schutz

1 Protected against solid objects over 50 mm Ø
Geschützt vor festen Gegenständen über 50 mm Ø

2 Protected against solid objects over 12 mm Ø
Geschützt vor festen Gegenständen über 12 mm Ø

3 Protected against solid objects over 2.5mm Ø
Geschützt vor festen Gegenständen über 2,5mm Ø

4 Protected against solid objects over 1.0 mm Ø
Geschützt vor festen Gegenständen über 1,0 mm Ø

5 Dust-protected
Staubgeschützt

6 Dust-tight
Staubdicht

SECOND DIGIT

Protection against liquids

Schutz gegen Flüssigkeiten

0 No protection
Kein Wasserschutz

1 Protected against vertically dripping water
Geschützt vor senkrecht fallendem Tropfwasser

2 Protected against water dripping at an angle (up to 15°)
Geschützt vor schräg fallendem Tropfwasser (bis 15°)

3 Protected against spraying water
Geschützt vor Sprühwasser

4 Protected against water splashing from all directions
Geschützt vor Spritzwasser aus allen Richtungen

5 Protected against water jets
Geschützt vor Strahlwasser

6 Protected against strong water jets
Geschützt vor starkem Strahlwasser

7 Protected against penetrating water when temporarily immersed
Geschützt vor eindringendem Wasser beim kurzzeitigen Eintauchen

8 Protected against penetrating water when submerged
Geschützt vor eindringendem Wasser beim Untertauchen

FINISHES

PAINTED FINISHES | METAL FINISHES

A	Anthracite Grey | Aluminium powder coated texture RAL 7016
B	Signal Black | Aluminium powder coated without texture RAL 9004
B	Jet Black | Aluminium powder coated wet painted in matt structure | RAL 9005
D	Grey Texture | Aluminium powder coated in matt structure
G	Gold | Aluminium painted/brushed
G	Cement Grey | Aluminium wet painted | RAL 7033
GW	Cement Grey and White | Aluminium wet painted
D	Dark Grey Texture | Composite material wet painted
J	White Texture and Gold | Aluminium wet painted
K	Black Texture and Gold | Aluminium wet painted
P	Copper | Aluminium or steel painted brushed
P	Copper | Steel varnished lacquered
Z	Black Texture and Copper | Aluminium powder coated
Q	Bronze | Aluminium painted/brushed
BQ	Black Texture and Bronze
R	Coral Red | Aluminium wet painted | RAL 3016
RW	Coral Red and White Texture | Aluminium wet painted

S	White Aluminium | Aluminium powder coated without texture | RAL 9006
S	Silver/Grey | Aluminium powder coated without texture
W	Signal White | Aluminium or steel powder coated wet painted in matt structure | RAL 9003
W	Pure White | Aluminium powder coated without texture RAL 9010
Y	Grey Brown | Aluminium or steel powder coated in matt structure | RAL 8019
A	Aluminium anodised
C	Chrome | Steel glossy chrome plated
G	Light Gold | Steel plated
P	Pink Copper | Steel plated
I	Inox | 304 Stainless steel electro polished
L	Aluminium brushed
M	Matt Chrome | Steel matt chrome plated
N	Black Chrome | Plated steel
V	Rust | Steel varnished rusted
SG	Silk Grey | wet painted | RAL 7044
FJ	Feel Jade | wet painted | NCS S 2005 – G90Y

MATERIALS

GLASS | MARBLE | WOOD | PORCELAIN | SYNTHETIC COMPOSITE MATERIAL

B	Smoked | Glass handblown
P	Copper | Glass handblown
TS	Taupe Striped | Glass handblown
TW	Taupe White | Glass handblown
TD	Taupe Diamond | Glass handblown
FD	Frosted Opal | Opal glass handblown
W	White | Opal glass handblown
Y	Brown | Opal glass handblown
MB	Black | Marble
MW	White | Marble
W	White | Porcelain handmade
W	White | LLDPE
AY	Amber Yellow | Polycarbonate

CW	Champagne White | Polycarbonate
HR	Hip Rose | Polycarbonate
SG	Smoke Grey | Polycarbonate
TG	Tea Green | Polycarbonate
OR	Traffic Orange | Polypropylene | RAL 2009
SB	Water Blue | Polypropylene | RAL 5021
YE	Colza Yellow | Polypropylene | RAL 1021
F	Grey | Recycled PET felt
G	Light Gold | Aluminium composite material
N	Black Chrome | Aluminium composite material
D	Multi Colour | Stone
W	Autumn White | Stone
WN	Walnut | Wood

COMBINATIONS

FINISHES AND MATERIALS

E	White Texture and Black | Aluminium powder coated brushed
GB	Gold Aluminium wet painted | Black Texture

350mA 12W DALI
Driver 220-240VAC | 50-60Hz
12W | 350mA | 6-24V | DALI DT6 – push DIM with memory function
L/W/H 88x52x25.5

CE 0.11kg IP20 EMC SELV

DEEP PETIT 6W | **DEEP ADJUST PETIT** 6W | **NOP PETIT** 6W
PLANO PETIT 1.0 6W, 2.0 6W (2x), 3.0 6W (3x) | **STRANGE PETIT** 1.0 6W, 2.0 6W (2x), 3.0 6W (3x)
CENO 1.0 6W , 1.1 6W

CODE
90243402

350/500/700mA 17-32W DIM
Driver 220-240VAC | 50-60Hz
350/500/700mA dipswitch selection
17W | 350mA | 2-47V
24W | 500mA | 2-47V
32W | 700mA | 2-46V
phase-cut dim | not for ambient dim
L/W/H 166x34x46

CE 0.19kg IP20 SELV

CODE
90228801

350mA 4W
Driver 100-240VAC | 50-60Hz
4W | 350mA | 4-12V
L/W/H 43x42x23

CE 0.05kg IP20 TÜV

CODE
90213201

350mA 6W
Driver 90-264VAC | 50-60Hz
6W | 350mA | 3-22V
L/W/H 64x35x21

CE 0.04kg IP20

LITO 2W | **ORIS** 0.7 1W, 1.3 2W, 2.0 2W | **STRIPE** 1W | **SMILE IN** 4W

CODE
90213202

350mA 10W DIM
Driver 220-240VAC | 50-60Hz | 10W
350mA | 12-28V | phase-cut dim
L/W/H 102x38x21

CE 0.09kg IP20 SELV

DEEP PETIT 6W | **DEEP ADJUST PETIT** 6W (1x) | **NOP PETIT** 6W (1x) **PLANO PETIT** 1.0 6W (1x) **STRANGE PETIT** 1.0 6W, 2.0 6W (2x), 3.0 6W (3x) | **CENO** 1.0 6W, 1.1 6W

CODE
90223402

350mA 10W 1-10V DIM
Driver 220-240VAC | 50-60Hz | 10W
350mA | 14-28V | 1-10V dim
L/W/H 101.5x51x29.5

CE 0.09kg IP20 SELV

DEEP PETIT 6W | **DEEP ADJUST PETIT** 6W | **NOP PETIT** 6W **PLANO PETIT** 1.0 6W, 2.0 6W (2x), 3.0 6W (3x) | **STRANGE PETIT** 1.0 6W, 2.0 6W (2x), 3.0 6W (3x)

CODE
90223401

250mA 10W DIM
Driver 220-240VAC | 50-60Hz
10-100% | 10W | preset at 250mA
16-29V | phase-cut dim
L/W/H 122x41x23

CE 0.094kg IP20 SELV

DEEP BIJOU 1.0 6W

CODE
90226401

250mA 10W DALI
Driver 220-240VAC | 50-60Hz
5-100% | 10W | 250mA
6-40V | DALI
L/W/H 124x31x21

CE 0.08kg EL IP20 EMC SELV

DEEP BIJOU 1.0 6W, 2.0 6W (2x)

CODE
90249402

250mA 15W DIM
Driver 220-240VAC | 50-60Hz
10-100% | 15W | preset at 250mA
26-42V | phase-cut dim
L/W/H 122x41x23

CE 0.096kg IP20 SELV

DEEP BIJOU 2.0 6W (2x)

CODE
90226501

350mA 15W DIM
Driver 220-240VAC | 50-60Hz | 15W
350mA | 27-42V | phase-cut dim
L/W/H 102x49x29

CE 0.09kg IP20 SELV

LED MODULES HO (1x) | 73240577 | 73240682 | 73240542 | 73240681 | 73241320 | 73241321

CODE
90223403

350/500/700mA 17.5-20W
Driver 220-240VAC | 50-60Hz
350/500/700mA output selection
17.5W | 350mA | 25-50V
20W | 500mA | 20-40V
20W | 700mA | 14-28.5V
L/W/H 101.5x51x29.5

CE 0.09kg IP20 SELV

CODE
90218601

350mA 20W DALI
Driver 220-240VAC | 50-60Hz
20W | 350mA | 9-45V | DALI DT6 – push DIM with memory function
L/W/H 116x40.5x22

CE 0.16kg IP20

CODE
90243602

350mA 30W
Driver 220-240VAC | 50-60Hz
30W | 350mA | 43-86V
L/W/H 127x43x30

CE 0.15kg IP20 SELV

CODE
90213701

500mA 6W
Driver 90-264VAC | 50-60Hz
6W | 500mA | 3-12V
L/W/H 64x35x21

CE 0.04kg IP20 EMC

THEMIS 4W | **STRANGE** wall 4W
LITO 3W | **SMILE IN** 6W | **ORIS** 1.5W

CODE
90214201

500mA 10W
Driver 220-240VAC | 50Hz
10W | 500mA | 11-20V
L/W/H 101.5x51x29.2

CE 0.116kg IP20 SELV

DEEP 10W | **DEEPER** 10W | **DEEP IP65** 9W | **BLIEK** 10W | **RINI** 10W
RON 10W | **RONY** 10W | **LUNA** 10W
STRANGE ceiling 10W | **SPYDER** 10W | **PLANO** 10W | **TAIO ROUND** 10W

CODE
90214405

500mA 6.5W DIM
Driver 220-240VAC | 50-60Hz
10-100% | 6.5W | preset at 500mA
7-13V | phase-cut dim
L/W/H 122x41x23

CE 0.07kg IP20 SELV

DEEP BIJOU IP65 4.5W
PIRRO 1.0 4.5W

CODE
90224301

500mA 10W 1-10V DIM
Driver 220-240VAC | 50-60Hz
10W | 500mA | 10-20V | 1-10V dim
L/W/H 100x43x22.5

CE 0.06kg IP20

CODE
90234401

500mA 10W DIM
Driver 220-240VAC | 50-60Hz | 5-100%
10W | 500mA | 3-20V | phase-cut dim
L/W/H 102x49x29

CE 0.08kg IP20 SELV

DEEP 10W | **DEEPER** 10W | **DEEP IP65** 9W | **BLIEK** 10W | **LUNA** 10W
PLANO 10W | **RON** 10W | **RINI** 10W
RONY 10W | **SNEAK** 10W
SPYDER 10W | **STRANGE** ceiling 10W | **TAIO ROUND** 10W

CODE
90224402

500mA 12W DALI
Driver 220-240VAC | 50-60Hz | 1-100%
12W | 500mA | 6-24V | DALI DT6 – push DIM with memory function
L/W/H 88x52x25.5

CE 0.11kg IP20 EMC SELV

DEEP 10W | **DEEPER** 10W | **BLIEK** 10W | **LUNA** 10W | **PIRRO** 1.0 4.5W, 2.0 4.5W (2x) | **PLANO** 10W | **RON** 10W | **RINI** 10W | **RONY** 10W
SNEAK 10W | **SPYDER** 10W
STRANGE ceiling 10W

CODE
90244402

500mA 15W DIM
Driver 220-240VAC | 50-60Hz
10-100% | 15W | preset at 500mA
12-20V | phase-cut dim
L/W/H 122x41x23

CE 0.08kg IP20 SELV

PIRRO 2.0 4.5W (2x)

CODE
90224503

500mA 20W DIM
Driver 220-240VAC | 50-60Hz
10-100% | 20W | preset at 500mA
26-38V | phase-cut dim
L/W/H 122x41x23

CE 0.0125kg IP20 SELV

PIRRO 4.0 4.5W (4x), 6.0 4.5W (6x)

CODE
90224602

500mA 21W DIM
Driver 220-240VAC | 50-60Hz
21W | 500mA | 16-42V | phase-cut dim
L/W/H 110x52x22

CE 0.11kg IP20 SELV

CODE
90224702

500mA 21W DIM
Driver 220-240VAC | 50-60Hz | 5-100%
21W | 500mA | 28-42V | phase-cut dim
L/W/H 101.5x51x29.5

CE 0.09kg IP20 SELV

CODE
90224701

500mA 20W DALI
Driver 220-240VAC | 50-60Hz
20W | 500mA | 9-45V | DALI DT6 – push DIM with memory function
L/W/H 116x40.5x22

CE 0.16kg IP20

CODE
90244604

500mA 25W DALI
Driver 220-240VAC | 50-60Hz | 1-100%
25W | 350-1050mA | preset at 500mA
20-50V | DSI | switch dim | DALI
L/W/H 130x43x30

CE 0.17kg IP20 SELV

CODE
90254603

700mA 6W
Driver 90-264VAC | 50-60Hz
6W | 700mA | 3-8.4V
L/W/H 64x35x21

CE 0.04kg IP20

STRIPE 2W | **THEMIS** 5W
STRANGE wall 4W | **ORIS** 0.7 2W, 1.3 4W, 2.0 4W

CODE
90215203

700mA 10W DIM
Driver 220-240VAC | 50-60Hz
10-100% | 10W | preset at 700mA
8-14V | phase-cut dim
L/W/H 122x41x23

CE 0.08kg IP20 SELV

BLIEK ROUND PETIT 1.0 6W

CODE
90225402

700mA 15W DIM
Driver 220-240VAC | 50-60Hz
10-100% | 15W | preset at 700mA
12-20V | phase-cut dim
L/W/H 122x41x23

CE 0.08kg IP20 SELV

BLIEK ROUND | **PETIT** 2.0 6W (2x)
CENO 2.0 6W (2x)

CODE
90225502

700mA 20W DIM
Driver 220-240VAC | 50-60Hz
20W | 700mA | 16-28V
phase-cut dim
L/W/H 110x52x22

CE 0.11kg IP20 SELV

CODE
90225603

700mA 20W DIM
Driver 220-240VAC | 50-60Hz
10-100% | 20W | preset at 700mA
15-28V | phase-cut dim
L/W/H 137.6x44x30

CE 0.105kg IP20 SELV

CENO 3.0 6W (3x)

CODE
90225604

700mA 25W DIM
Driver 220-240VAC | 50-60Hz
25W | 700mA | 17-35V
phase-cut dim
L/W/H 145x51x30

CE 0.12kg IP20 SELV

CODE
90225701

700mA 30W DIM
Driver 220-240VAC | 50-60Hz
10-100% | 30W | preset at 700mA
26-42V | phase-cut dim
L/W/H 137.6x44x30

CE 0.14kg IP20 SELV

DEEP FORT
DEEP ADJUST FORT 25W
PLANO ADJUST FORT 25W

CODE
90225702

700mA 10W DALI
Driver 220-240VAC | 50-60Hz | 1-100%
10W | 700mA | 2.5-14V | DALI
L/W/H 124x31x21

CE 0.08kg EL IP20 EMC SELV

BLIEK ROUND PETIT 1.0 6W

CODE
90245401

700mA 30W DALI 1-10V DIM
Driver 220-240VAC | 50-60Hz
30W | preset at 700mA | 9-42V
DALI | 1-10V dim
L/W/H 103x67x22

CE 0.142kg IP20 SELV

CODE
90245703

700mA 35W DALI
Driver 220-240VAC | 50-60Hz | 35W
preset at 700mA | 9-40V | DALI DT6 – push DIM with memory function
L/W/H 136x42.5x24

CE 0.21kg IP20 SELV

DEEP ADJUST FORT 25W | **CENO** 2.0 6W (2x), 3.0 6W (3x) | **PLANO ADJUST FORT** 25W | **BLIEK ROUND PETIT** 2.0 6W (2x)

CODE
90245801

350mA 3W IP66
Driver 90-264VAC | 50-60Hz
3W | 350mA | 3-15V
L/W/H 52x30x23

CE 0.05kg IP66 EMC

ORIS 0.7 1W | **ORIS** 1.3 2W | **ORIS** 2.0 2W | **CARD** 1W

CODE
90213101

350mA 7W IP67
Driver 90-295VAC | 47-63Hz
7W | 350mA | 10-20V
L/W/H 57x41x24

CE 0.05kg IP67 SELV

CODE
90213301

350mA 17W IP68
Driver 220-240VAC | 50-60Hz
17W | 350mA | 2-49V
L/W/H 122x54x26

CE 0.25kg IP68 SELV

DEEP IP65 6.3 W | **TAIO ROUND** 6W | **SMILE IN** 4W

CODE
90213602

500mA 7W IP67
Driver 90-295VAC | 47-63Hz
7W | 500mA | 5-14.5V
L/W/H 57x41x24

CE 0.15kg IP67 SELV

DEEP BIJOU IP65 4.5W

CODE
90214301

500mA 24W IP68
Driver 220-240VAC | 50-60Hz
24W | 500mA | 2-49V
L/W/H 122x54x26

CE 0.25kg IP68 SELV

DEEP IP65 9W | **TAIO ROUND**
SMILE IN 6W

CODE
90214702

700mA 3W IP66
Driver 90-264VAC | 50-60Hz
3W | 700mA | 3-6V
L/W/H 52x30x23

CE 0.09kg IP66 EMC

CODE
90215101

700mA 7W IP67
Driver 90-295VAC | 47-63Hz
7W | 700mA | 3-10.5V
L/W/H 57x41x24

CE 0.07kg IP67

ORIS 1.3 4W
ORIS 2.0 4W
ORIS 0,7 2W

CODE
90215301

LED DRIVER 24V/35W
220-240VAC | 50-60Hz
35W | 24V | PWM dim
L/W/H 142x43x30

CE 0.14 kg IP20 SELV

ILANE

CODE
90212801

LED DRIVER 24V/100W
220-240VAC | 50-60Hz
100W | 24V | PWM dim
L/W/H 295x43x30

CE 0.23 kg IP20 SELV

ILANE

CODE
90212902

LED DRIVER 24V/25W
220-240VAC | 50-60Hz
0-24W | 24V | phase-cut dim
L/W/H 137x50x15,5

CE 0.90 kg IP20 SELV

ILANE

CODE
90222701

LED DRIVER 24V/50W
220-240VAC | 50-60Hz
12-50W | 24V | phase-cut dim
L/W/H 166x52x24

CE 0.95 kg IP20 SELV

ILANE

CODE
90222901

DALI TO PHASE-CUT DIMMING MODULE
for converting a DALI signal to phase-cut dim | 230V | 10-300W | LED
L/W/H 120x30x22

CE IP20

CODE
90270901

CONNECTION BOX 3P PAR16
incl. strain relief | 3 pole push connector | incl. PAR16 socket incl. through-wiring
L/W/H 75x35x25

CODE
90059126

CONNECTION BOX 5P
incl. strain relief | 5 pole push connector | incl. through-wiring
L/W/H 70x60x30



CODE
90059120

TRANSFORMER 12V/105W
230-240VAC | 50-60Hz | 35-105VA
105W | 12V | leading + trailing edge
L/W/H 108x52x33

CE 0.12kg IP20

CODE
90221905

TRANSFORMER 12V/70W
230-240VAC | 50-60Hz | 20-70VA
70W | 12V | leading + trailing edge
L/W/H 108x52x33

CE 0.12kg IP20

CODE
90221904

LED DRIVER 12V/10W
220-240VAC | 50-60Hz | 3-10VA
10W | 12V| leading + trailing edge
L/W/H 102x51x30

CE 0.1kg IP20

CODE
90221401

LED DRIVER 12V/25W
220-240VAC | 50-60Hz | 8-25VA
25W | 12V| leading + trailing edge
L/W/H 145x51x29.5

CE 0.1kg IP20

CODE
90221701

LED DRIVER 48V/100W
220-240VAC | 50-60Hz
100W | 48V
L/W/H 350x30x18

CE 0.18 kg IP20 SELV

STREX SYSTEM

CODE
90218901

LED DRIVER 48V/150W
220-240VAC | 50-60Hz
150W | 48V
L/W/H 350x30x18

CE 0.28 kg IP20 SELV

STREX SYSTEM

CODE
90218902

LED DRIVER 48V/250W
220-240VAC | 50-60Hz
250W | 48V
L/W/H 400x40x22

CE 0.50 kg IP20 SELV

STREX SYSTEM

CODE
90218903

DIMMER DIN RAIL
DIM leading /trailing edge
230V | max. 200W LED
L/W/H 17x55x90

CE IP30



CODE
90019018

DIMMER BLUETOOTH FOR SWITCH
phase-cut dim | 220-240V | 50Hz
LED 3-200W | incandescent 15-200W
L/W/H 44x23x44

CE IP20

CODE
90019100

DIMMER FOR SWITCH
DIM leading /trailing edge
230V | max. 200W LED
L/W/H 48x17.5x46

CE IP30

CODE
90019017

DALI DIMMER FOR SWITCH
230V | 50-60Hz
L/W/H 48x49x22

CE 0.036kg IP20

CODE
90019194

LED MODULE HO
LED Module | 350mA | 35Vf
1800-3000K | 12W | >90 CRI 1050lm
compatibility on request

CE 0.06kg IP20 26°

CODE
73241320
73241321

LED MODULE HO 2700K
LED Module | 350mA | 35Vf
2700K | 12W | >90 CRI | 1340lm
compatibility on request

CE 0.06kg IP20 26°

CODE
73240577
73240682

LED MODULE HO 3000K
LED Module | 350mA | 35Vf
3000K | 12W | >90 CRI | 1410lm
compatibility on request

CE 0.06kg IP20 26°

CODE
73240542
73240681

LED MODULE HO 4000K
LED Module | 350mA | 35Vf
4000K | 12W | >90 CRI | 1420lm
compatibility on request

CE 0.06kg IP20 26°

CODE
73240985
73240984

PAR16 FLAT HEAD
PAR16 | GU10 | 220-240VAC
50-60Hz

CE 0.06kg IP20

CODE
90059125

LED AC MODULE 2700K
220-240V | COB 3-step | phase-cut dim | >90 CRI | 8W | 2700K | 515lm
compatibility on request

CE 0.08kg IP20 31°



CODE
901268W3
901268B3

LED AC MODULE 3000K
220-240V | COB 3-step | phase-cut dim | >90 CRI | 8W | 3000K | 535lm
compatibility on request

CE 0.08kg IP20 31°



CODE
901268W5
901268B5

PAR16 LED 2700K
PAR16 LED | GU10 | 175-250VAC
50-60Hz | 2700K | 7W | >80 CRI
480lm | phase-cut dim

CE 0.06kg IP20 45°

CODE
901228W2

PAR16 LED 2700K
PAR16 LED | GU10 | 175-250VAC
50-60Hz | 2700K | 7W | >90 CRI
360lm | phase-cut dim

CE 0.06kg IP20 45°

CODE
901228W3

PAR16 LED 2700K
PAR16 LED | GU10 | 175-250VAC
50-60Hz | 2700K | 7W | >90 CRI
360lm | phase-cut dim

CE 0.06kg IP20 45°

CODE
901228B3

PAR16 LED 2700K
PAR16 LED | GU10 | 220-240VAC
50-60Hz | 2700K | 4.3W | >80 CRI
350lm

CE 0.06kg IP20 36°

CODE
905227S2

PAR16 LED 3000K
PAR16 LED | GU10 | 175-250VAC
50-60Hz | 3000K | 7W | >80 CRI
465lm | phase-cut dim

CE 0.06kg IP20 45°

CODE
901228W4

PAR16 LED 3000K
PAR16 LED | GU10 | 175-250VAC
50-60Hz | 3000K | 7W | >90 CRI
360lm | phase-cut dim

CE 0.06kg IP20 45°

CODE
901228B5

PAR16 LED 3000K
PAR16 LED | GU10 | 220-240VAC
50-60Hz | 3000K | 4.3W | >80 CRI
350lm

CE 0.06kg IP20 36°



CODE
905227S4

METAL SPRING CLIP
alternative front lamp fixation spring for ø 50 lamp rings
MR16 | LED | PAR16 | max. 12W
DEEP ADJUST | **DEEP ASYM**
DEEP 2.0 | **PLANO STRANGE** ceiling | **SPINEO** | **NOP** | **SOLID**

CODE
73240203

SPRING CLIP
lamp fixation | push-in system
for ø 50 lamp rings
MR16 | LED | PAR16 | max. 12W
DEEP ADJUST | **DEEP ASYM**
DEEP 2.0 | **PLANO** | **STRANGE** ceiling | **SPINEO** | **NOP** | **SOLID**

CODE
73240651
73240941
73240940
73240942
73240652

QT14 LED 2700K
QT14 LED | G9 | 220-240VAC
50-60Hz | 2700K | 3W | >80 CRI | 200lm
RAY wall | **BOX** wall
CE 0.02kg IP20

CODE
9019G705

QT14 LED 3000K
QT14 LED | G9 | 220-240VAC
50Hz | 3000K | 3W | >80 CRI | 300lm
RAY wall | **BOX** wall
CE 0.03kg IP20

CODE
9019G703

QT14 LED 3000K OPAL
QT14 LED | G9 | 220-240VAC
50-60Hz | 3000K | 3.5W | 80 CRI
250lm | phase-cut dim | opal
DRO 1.0
CE 0.03kg IP20

CODE
9010G804

C35 LED 2700K OPAL
C35 LED | E14 | 220-240VAC | 50-60Hz
2700K | 6W | >90 CRI | 450lm
phase-cut dim 20-100% | opal
REVER wall | **DRO** 2.0
CE 0.03kg IP20



CODE
9003C103

A60 LED 2700K OPAL
A60 LED | E27 | 220-240VAC
50-60Hz | 2700K | 9W | >90 CRI
800lm | phase-cut dim | opal
REVER table | floor | **DRO** 3.0
ROOMOR suspended
CE 0.04kg IP20



CODE
9003E152

A60 LED 2700K OPAL
A60 LED | E27 | 220-240VAC
50-60Hz | 2700K | 15W | >90 CRI
1400lm | phase-cut dim | opal
REVER suspended | **DRO** 4.0
CE 0.04kg IP20



CODE
9003E153

G95 LED 2700K OPAL
G95 LED | E27 | 220-240VAC | 50-60Hz
2700K | 12W | >90 CRI | 1000lm
phase-cut dim | opal
ROCK | **BISHOP**
CE 0.1kg IP20



CODE
9003E154

A60 LED 2200K MIRROR
A60 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2200K | 6W
>95 CRI | 400lm | phase-cut dim
MIRRO 1.0
CE 0.04kg IP20



CODE
gold mirror 9003E150

A60 LED 2700K MIRROR
A60 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2700K | 6W
>90 CRI | 500lm | phase-cut dim
MIRRO 1.0
CE 0.04kg IP20

CODE
gold mirror 9003E139
silver mirror 9003E140

G95 LED 2200K MIRROR
G95 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2200K | 6W
>95 CRI | 400lm | phase-cut dim
MIRRO 2.0, 3.0 | **RUVI**
CE 0.07kg IP20



CODE
gold mirror 9003E151

G95 LED 2700K MIRROR
G95 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2700K | 6W
>90 CRI | 500lm | phase-cut dim
MIRRO 2.0, 3.0 | **RUVI**
CE 0.07kg IP20

CODE
gold mirror 9003E142
silver mirror 9003E149

A60 LAMP 2200K
A60 DECORATIVE LOW OUTPUT
CARBON FILAMENT | E27
220-240VAC | 2200K | 15W | 50lm
phase-cut dim
WIRO 1.8, 2.0, 3.8 | **CONE**
CE 0.04kg IP20



CODE
9003E124

G95 LAMP 2200K
G95 DECORATIVE LOW OUTPUT
CARBON FILAMENT | E27
220-240VAC | 2200K | 15W | 50lm
phase-cut dim
CE 0.06kg IP20



CODE
9003E102

ST64 LAMP 2200K
ST64 DECORATIVE LOW OUTPUT
CARBON FILAMENT | E27
220-240VAC | 2200K | 15W | 50lm
phase-cut dim
WIRO 6.1
CE 0.05kg IP20



CODE
9003E105

A60 LED 2200K
A60 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2200K | 4.5W
>90CRI | 315lm | phase-cut dim
gold tinted glass
WIRO 2.0, 3.8, 6.1, 6.5 | **CONE GLOBE**
1.0, 2.0, 3.0 | **ROCK** | **J.J.W.** | **BISHOP**
CE 0.04kg IP20

CODE
9003E109

A60 LED 2700K DIM
A60 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2700K | 6W
>85 CRI | 500lm | phase-cut dim
WIRO 2.0, 3.8, 6.1, 6.5 | **GLOBE** 1.0,
2.0, 3.0 | **ROCK** | **J.J.W.** | **BISHOP**
CE 0.04kg IP20



CODE
9003E138

G95 LED 2200K
G95 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2200K | 6W
>95 CRI | 450lm | phase-cut dim
gold tinted glass
ROCK | **RUVI** | **BISHOP**
CE 0.07kg IP20



CODE
9003E111

ST64 LED 2200K DIM
ST64 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2200K | 6W
>95 CRI | 450lm | phase-cut dim
gold tinted glass
GLOBE 3.0
CE 0.05kg IP20

CODE
9003E110

G125 LED 2200K
G125 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2200K | 6W
>95 CRI | 450lm | phase-cut dim
gold tinted glass
CE 0.11kg IP20



CODE
9003E112

T30-225 LED 2200K
T30-225 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2200K | 6W
>95 CRI | 450lm | phase-cut dim
gold tinted glass
WIRO 1.8, 3.8 | wall | table | floor
CONE DIAMOND | **INDUSTRY**
GLOBE 4.0
CE 0.06kg IP20

CODE
9003E129

T30-225 LED 2700K
T30-225 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2700K | 6W
>90 CRI | 500lm | phase-cut dim
gold tinted glass
WIRO 1.8, 3.8, 6.1, 6.5 | wall | table | floor
CONE | **GLOBE** 4.0
CE 0.06kg IP20

CODE
9003E136

T32-180 LAMP 2200K
T32-180 DECORATIVE LOW
OUTPUT CARBON FILAMENT | E27
220-240VAC | 2200K | 15W | 50lm
phase-cut dim
WIRO 1.8 | **WIRO** wall table | floor
CONE | **GLOBE** | **INDUSTRY**
CE 0.05kg IP20

CODE
9003E106

T32-300 LAMP 2200K
T32-300 DECORATIVE LOW
OUTPUT CARBON FILAMENT | E27
220-240VAC | 2200K | 15W | 50lm
phase-cut dim | **WIRO** 6.5
INDUSTRY | **DIAMOND** | **GLOBE**
1.0, 2.0, 5.0, 6.0 | **GLOBE** floor 1.0, 2.0
GLOBE table 2.0 | **ROCK NAKED**
CE 0.07kg IP20

CODE
9003E127

T30-300 LED 2200K
T30-300 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2200K | 8W
>95 CRI | 550lm | phase-cut dim
gold tinted glass
WIRO 6.1, 6.5 | **DIAMOND**
INDUSTRY | **GLOBE** 1.0, 2.0, 5.0, 6.0
table 2.0 | floor 1.0, 2.0 | **ROCK NAKED**
CE 0.08kg IP20

CODE
9003E130

T30-300 LED 2700K
T30-300 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2700K | 8W
>90 CRI | 550lm | phase-cut dim
WIRO 6.1, 6.5 | **DIAMOND**
INDUSTRY | **GLOBE** 1.0, 2.0, 5.0, 6.0
table 2.0 | floor 1.0, 2.0 | **ROCK NAKED**
CE 0.08kg IP20

CODE
9003E135

PLANO 1.0
plasterkit

CODE
90017104

PLANO 2.0
plasterkit



CODE
90017105

LUNA 1.0 ROUND
plasterkit
not compatible with LUNA ROUND
IP44 1.0 LED HV

140x100 115



CODE
90017101

LUNA 1.0 SQUARE
plasterkit
not compatible with LUNA SQUARE
IP44 1.0 LED HV

140x100 115



CODE
90017102

LITO
plasterkit

CODE
90017119

THEMIS 1.7
plasterkit



CODE
90017111

THEMIS 2.7
plasterkit



CODE
90017112

THEMIS 5.0
plasterkit



CODE
90017115

STRANGE 1.0 | SNEAK TRIMLESS 1.0
aluminium plasterkit

86x86 8-32



CODE
90017120

STRANGE 1.0 | SNEAK TRIMLESS 1.0
plastic plasterkit

86x86 10 or 13



CODE
90017122
90017116

DEEP ADJUST TRIMLESS
plasterkit

105-110 12.5, 15, 20, 25



CODE
90017209

STRANGE PETIT 1.0
aluminium plasterkit

64x64 7-17



CODE
90017202

STRANGE PETIT 1.0
plastic plasterkit

68x68 10 or 13



CODE
90017200
90017201

STRANGE 2.0 | SNEAK TRIMLESS 2.0
aluminium plasterkit

156x86 8-32



CODE
90017121

STRANGE 2.0 | SNEAK TRIMLESS 2.0
plastic plasterkit

156x86 10 or 13



CODE
90017123
90017117

ORIS 0.7
recessed housing incl. plasterkit

191x58 60



CODE
90012039

STRANGE PETIT 2.0
aluminium plasterkit

64x117 7-17



CODE
90017205

STRANGE PETIT 2.0
plastic plasterkit

68x119 10 or 13



CODE
90017203
90017204

STRANGE PETIT 3.0
aluminium plasterkit

64x169 7-17



CODE
90017208

STRANGE PETIT 3.0
plastic plasterkit

68x171 10 or 13



CODE
90017206
90017207

ORIS 1.3
recessed housing incl. plasterkit

122x122 60



CODE
90012041

ORIS 2.0
recessed housing incl. plasterkit

123x191 60



CODE
90012043

STRIPE 0.4 | 0.7
recessed housing incl. plasterkit

75x75 55



CODE
90012037

STRIPE 2.2
recessed housing incl. plasterkit

251x76 55



CODE
90012038

RECESSED HOUSING

ACCESSORIES

SMILE IN
recessed ring

Ø 91 | 55

CODE
90012030

LITO
recessed housing
always use in combination with plasterkit

122x90 | 45

CODE
90012027

THEMIS 1.7
recessed housing
always use in combination with plasterkit

272x160 | 85



CODE
90012032

THEMIS 2.7
recessed housing
always use in combination with plasterkit

372x160 | 85



CODE
90012033

THEMIS 5.0
recessed housing
always use in combination with plasterkit

572x160 | 85



CODE
90012036

ORIS 0.7
concrete housing

192x58 | 60



CODE
90012044

ORIS 1.3
concrete housing

121x121 | 60



CODE
90012040

ORIS 2.0
concrete housing

123x191 | 60



CODE
90012042

MAP 0.6 | CHART 0.6
ground housing

Ø 137 | 110



CODE
90012201

MAP 0.9 | CHART 0.9
ground housing

Ø 137 | 130



CODE
90012202

MAP 1.2 | CHART 1.2
MAP ASYM 1.2 | CHART ASYM 1.2
ground housing

Ø 190 | 158



CODE
90012203

MAP 1.6 | CHART 1.6
MAP ASYM 1.6 | CHART ASYM 1.6
ground housing

Ø 220 | 184



CODE
90012204

STREX SYSTEM

ACCESSORIES

BLANK COVER



	CODE
1.0m	911001W0
1.0m	911001B0
2.0m	911002W0
2.0m	911002B0
3.0m	911003W0
3.0m	911003B0

DALI SELV DEVICE
for 48V system | max. 300W
48VDC
L/W/H 213x37x25



CODE
90019193

NON ELECTRICAL L-CONNECTOR RECESSED



	CODE
	90014256
	90014257

NON ELECTRICAL L-CONNECTOR SURFACE



	CODE
	90014258
	90014259

RECESSED
track | custom cuts | 48V | 15A | DALI

SELV



	CODE
< 1.0m	90014187CC
< 1.0m	90014188CC
< 2.0m	90014189CC
< 2.0m	90014190CC
< 3.0m	90014191CC
< 3.0m	90014192CC

CC = for lengths specifications please add four digits in mm

SURFACE
track | custom cuts | 48V | 15A | DALI

SELV



	CODE
< 1.0m	90014181CC
< 1.0m	90014182CC
< 2.0m	90014183CC
< 2.0m	90014184CC
< 3.0m	90014185CC
< 3.0m	90014186CC

CC = for lengths specifications please add four digits in mm

SUSPENDED
track | custom cuts | 48V | 15A | DALI

SELV



	CODE
< 1.0m	90014181CC
< 1.0m	90014182CC
< 2.0m	90014183CC
< 2.0m	90014184CC
< 3.0m	90014185CC
< 3.0m	90014186CC

CC = for lengths specifications please add four digits in mm

SUSP. INDIRECT LIGHT
track | custom cuts | 48V | 15A | DALI
with indirect light

SELV



	CODE
< 2.0m	900140W_CC
< 2.0m	900140B_CC
< 3.0m	900141W_CC
< 3.0m	900141B_CC

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	14W/m	950/m	>90	5

CC = for lengths specifications please add four digits in mm

TRACK ADAPTER
no space for driver
for suspended luminaires without
steel wire | incl. strain relief
max. weight 10kg

	CODE
	90014044
	90014043

FLEXIBLE CORNER



	CODE
	90014042
	90014041

COVERPLATE I/L/T/X
only use with recessed tracks



	CODE
	90014126
	90014127

COVERPLATE END FEEDS
only use with recessed tracks



	CODE
	90014124
	90014125

TRACK ADAPTER
no space for driver
for suspended luminaires without
steel wire | incl. strain relief
max. weight 3kg



	CODE
	90014277
	90014278

T-CONNECTOR
can be used as feed

top view



	CODE
	90014010
	90014011

T-CONNECTOR
can be used as feed

top view



	CODE
	90014012
	90014013

T-CONNECTOR
can be used as feed

top view



	CODE
	90014014
	90014015

T-CONNECTOR
can be used as feed

top view



	CODE
	90014016
	90014017

CUTTING TOOL
for cutting the inner copper cables of
3-phase track and 48V track
CE TÜV

	CODE
	90014165

TRACK ADAPTER
no space for driver
for suspended luminaires without
steel wire | incl. strain relief
max. weight 5kg

	CODE
	90014279
	90014280

T-CONNECTOR
can be used as feed

top view



	CODE
	90014228
	90014229

T-CONNECTOR
can be used as feed

top view



	CODE
	90014230
	90014231

T-CONNECTOR
can be used as feed

top view



	CODE
	90014232
	90014233

T-CONNECTOR
can be used as feed

top view



	CODE
	90014234
	90014235

MINI CONNECTOR | ILANE
strip to strip



	CODE
IP20	90014268

MINI CONNECTOR | ILANE
strip to strip wired



	CODE
IP20	90014269

BLACK DIFFUSER COVER ILANE

only for 1.0

	CODE
2.0m	911902B1
3.0m	911903B1

only for 3.0

	CODE
2.0m	911912B1
3.0m	911913B1

SUSPENSION OPTIONS

ACCESSORIES

STRAIN RELIEF
for multi base | without steel wire
REVER | CONE



CODE
90052023

WIRO
single decenter set without ceiling base | E27 | 2.6m



CODE
90015160

WIRO
single decenter set without ceiling base | E27 | 6.0m



CODE
90015161

WIRO
6.0m suspension

Decenter 1.0

CODE
90052051

Decenter 2.0

90052056

Decenter 3.0

90052063

STRAIN RELIEF
accessory for WIRO suspension or for textile cables



CODE
90052064

WIRO
cable wall bracket
only for WIRO textile cable



CODE
90052062

WIRO
ceiling hook



CODE
90052061

ROOMOR TUBE 1.0 | 2.0
extension tube | 0.5m | use only 1 per luminaire

CODE
90019192

ROOMOR E27
6.0m suspension
including single surface ceiling base

CODE
2482E0B_ _
2482E0R_ _
2482E0G_ _

ROOMOR PAR16
6.0m suspension
including single surface ceiling base

CODE
248220B_ _
248220R_ _
248220G_ _

BISHOP SUSPENSION 6.0M
only for BISHOP 4.0 and 6.0

white susp. set - white ceiling base
grey susp. set - grey ceiling base
red susp. set - white ceiling base
black susp. set - black ceiling base

CODE
90015128
90015140
90015136
90015127

BISHOP SUSPENSION 6.0M
only for BISHOP 8.0

white susp. set - white ceiling base
grey susp. set - grey ceiling base
red susp. set - white ceiling base
black susp. set - black ceiling base

CODE
90015131
90015141
90015137
90015130

ROOMOR TUBE 1.0 | 2.0
extension tube | 1.0m | use only 1 per luminaire

CODE
90019191

SINGLE CEILING BASE
semi recessed | for shades without steel wire only



CODE
90052026
90052027

SINGLE SUSPENSION
ceiling base round



CODE
90052022
90052021

INVISIBLE CEILING SUSPENSION SYSTEM
plasterkit | system - with fixation and adjustment with or without steel cable | max. 10kg



CODE
90015196
90015195

SUSPENSION OPTIONS

ACCESSORIES

WALL BASE ROUND
wall base round for 1 luminaire
incl. switch on/off
incl. 2 wall-ceiling brackets



CODE
90019195
90019196

CABLE WALL-CEILING BRACKET
for cable 4.25-5.5mm diameter



CODE
90019197
90019198

HOOK
for multi suspension
DINOR | REVER



CODE
90052066
90052065

SHIEK 4.0 | 5.0
cable ring for 3 luminaires

CODE
90059123
90059121

SHIEK 4.0 | 5.0
cable ring for 4 luminaires

CODE
90059124
90059122

CONNECTOR SET
extra set standard connectors for 5 to 8 pieces | use when connecting more than 4 MULTI fixtures to one ceiling base round

CODE
90059118

MULTIPLE SUSPENSION CEILING BASE ROUND
standard up to 4 luminaires
add 90059118 for 5 - 8 luminaires
BOX | DOCUS | HEXO | RAY MULTI WETRO | SHIEK | DINOR | SELO ODREY



CODE
90052005
90052006

MULTIPLE SUSPENSION CEILING BASE
600mm | 2 luminaires
BOX | DOCUS | HEXO | RAY MULTI WETRO | SHIEK | SELO | ODREY



CODE
90052007
90052008

MULTIPLE SUSPENSION CEILING BASE
900mm | 3 luminaires
BOX | DOCUS | HEXO | RAY MULTI WETRO | SHIEK | SELO | ODREY



CODE
90052009
90052010

MULTIPLE SUSPENSION CEILING BASE
1200mm | 4 luminaires
BOX | DOCUS | HEXO | RAY MULTI WETRO | SHIEK | SELO | ODREY



CODE
90052011
90052012

MULTIPLE SUSPENSION CEILING BASE
1500mm | 5 luminaires
BOX | DOCUS | HEXO | RAY MULTI WETRO | SHIEK | SELO | ODREY



CODE
90052013
90052014

ACCESSORIES

ACCESSORIES

ROOMOR
shade 1.0



CODE
9113610B1
9113610K1
911361RW1
911361GW1
felt 911361FT1

ROOMOR
shade 2.0



CODE
9113620B1
9113620K1
911362RW1
911362GW1
felt 911362FT1

ROOMOR
shade 3.0



CODE
9113630B1
9113630K1
911363RW1
911363GW1
felt 911363FT1

ROOMOR
shade 4.0



CODE
9113640B1
9113640K1
911364RW1
911364GW1
felt 911364FT1

ODREY
shade 1.0

CODE
911421G1
911421B1

ODREY
shade 2.0



CODE
91140GG0
91140GB0
91140BB0
91140BG0

ODREY
shade 3.0

CODE
911423G1
911423B1

ODREY
shade 4.0

CODE
911424G1
911424B1

ODREY
shade 5.0



CODE
911425G1
911425B1

ODREY
shade 6.0

CODE
911426G1
911426B1

ODREY
shade 7.0

CODE
911427G1
911427B1

ODREY
shade 8.0

CODE
911428G1
911428B1

ACCESSORIES

CORK
bottle 1 | clear glass

	CODE
	90019013

CORK
bottle 2 | clear glass with closing cap



	CODE
	90019014

HONEYCOMB
CENO | PIRRO
BLIEK ROUND PETIT

	CODE
	90051130
	90051131

HONEYCOMB
CENO ON TRACK 3 PHASE

	CODE
	90051132

BOX | RAY
flaps for adjustable beam angle
powder coated white



	CODE
	900401W0

STAKE
snoot

	CODE
	90019004

GETTON
big cover



	CODE
	911141W1
	911141D1

X-BEAM
snoot



	CODE
	90019023

BASE

BASE 170
with concrete ground fixation
FIFTY FIFTY | SWAY
PALOS ROUND | PALOS CARRÉ

	CODE
	910073D0
	910073A0
	910073Q0
	910073B0

BASE 170
with fixation plate
FIFTY FIFTY | SWAY
PALOS ROUND | PALOS CARRÉ



	CODE
	910013D0
	910013A0
	910013Q0
	910013B0

BASE 270
with fixation plate
FIFTY FIFTY | SWAY
PALOS ROUND | PALOS CARRÉ

	CODE
	910014D0
	910014A0
	910014Q0
	910014B0

BASE 470
with fixation plate
FIFTY FIFTY | SWAY
PALOS ROUND | PALOS CARRÉ



	CODE
	910016D0
	910016A0
	910016Q0
	910016B0

BASE 670
with fixation plate
FIFTY FIFTY | SWAY
PALOS ROUND | PALOS CARRÉ



	CODE
	910018D0
	910018A0
	910018Q0
	910018B0

BASE 870
with fixation plate
FIFTY FIFTY | SWAY
PALOS ROUND | PALOS CARRÉ



	CODE
	910010D0
	910010A0
	910010Q0
	910010B0

BASE 270
with concrete ground fixation
FIFTY FIFTY | SWAY
PALOS ROUND | PALOS CARRÉ

	CODE
	910074D0
	910074A0
	910074Q0
	910074B0

BASE 470
with concrete ground fixation
FIFTY FIFTY | SWAY
PALOS ROUND | PALOS CARRÉ



	CODE
	910076D0
	910076A0
	910076Q0
	910076B0

BASE 670
with concrete ground fixation
FIFTY FIFTY | SWAY
PALOS ROUND | PALOS CARRÉ



	CODE
	910078D0
	910078A0
	910078Q0
	910078B0

BASE 870
with concrete ground fixation
FIFTY FIFTY | SWAY
PALOS ROUND | PALOS CARRÉ



	CODE
	910070D0
	910070A0
	910070Q0
	910070B0

X-BEAM
ground spike

CODE
90013115

TAPE | PACE
ground spike



CODE
90013102

GETTON POLE
ground spike



CODE
90013101

LINUS
ground spike



CODE
90013103

LINUS
ground fixation



CODE
90013302

PALLUZ C
ground fixation



CODE
90013303

PALLUZ C
ground spike only for invisible fixation base 90



CODE
90013104

STAKE 1.0 | STIPO
ground spike

CODE
90013106

STAKE FOLD
ground spike



CODE
90013107

PALLUZ C 90
invisible fixation base



CODE
910032D0

PALLUZ C 100



CODE
910033D0

PALLUZ C 470



CODE
910036D0

PALLUZ C 670



CODE
910038D0

LINUS 150



CODE
910024D0
910024Y0
910024A0

LINUS 350



CODE
910026D0
910026Y0
910026A0

LINUS 550



CODE
910028D0
910028Y0
910028A0

GETTON 275

CODE
910052D0

GETTON 475



CODE
910054D0

GETTON 675



CODE
910058D0

ICONS

ICON	ENGLISH	GERMAN	FLEMISH	FRENCH	SPANISH	ITALIAN	RUSSIAN
	Cutout Round	Ausschnitt rund	Ronde inbouwopening	Découpe ronde	Corte circular	Taglio tondo	Вырез круглый
	Cutout Square	Ausschnitt eckig	Rechthoekige inbouwopening	Découpe rectangulaire	Corte rectangular	Taglio quadro	Вырез квадратный
	Recessed Depth	Einbautiefe	Inbouwdiepte	Profondeur d'encastrement	Profundidad de empotramiento	Profonditá dell´incasso	Установочная глубина
	Low Recessed Depth	Geringe Einbautiefe	Lage inbouwdiepte	Encastré Profondeur faible	Reducida profundidad de empotramiento	Profonditá dell´incasso ridotta	Низкая глубина встраивания
	Thickness	Stärke	Dikte	Épaisseur	Espesor	Spessore	Толщина
	Turn Vertical	Vertikal drehbar	Verticaal richtbaar	Orientable vertical	Orientable en vertical	Orientabile in verticale	Наклонный по вертикали
	Turn Horizontal	Horizontal drehbar	Horizontaal richtbaar	Orientable horizontal	Orientable en horizontal	Orientabile in orizzontale	Поворотный по горизонтали
	Beam Angle	Abstrahlwinkel	Reflectorhoek	Faiseau	Ángulo de apertura	Angolo di apertura (del fascio)	Угол рассеивания
	Tilting outside the luminaire	Nach außen schwenkbar	Kantel- en richtbaar	Projecteur extractible	Basculación exterior de la luminaria	Inclinazione esterna apparecchio	Вращение снаружи
	Class 1 Fixture	Leuchte der Klasse 1	Toestel klasse 1	Appareil classe 1	Aparato de clase 1	Lampada classe 1	Класс защиты светильника 1
	Class 2 Fixture	Leuchte der Klasse 2	Toestel klasse 2	Appareil classe 2	Aparato de clase 2	Lampada classe 2	Класс защиты светильника 2
	Class 3 Fixture	Leuchte der Klasse 3	Toestel klasse 3	Appareil classe 3	Aparato de clase 3	Lampada classe 3	Класс защиты светильника 3
	Safety Distance	Sicherheitsabstand	Veiligheidsafstand	Distance de sécurité	Distancia de seguridad	Distanza di sicurezza	Безопасное расстояние
IP 20	IP rating	Schutzklasse	IP rating	Indice de protection	Grado IP	Grado di protezione IP	Класс защиты IP
IK 01	IK rating	Schlagfestigkeit	IK rating	IK rating	Grado IK	IK rating	Код защиты IK
	Plastic	Kunststoff	Kunststof	Plastique	Plástico	Plastica	пластик
	Protection Glass	Sicherheitsglas	Beschermglas	Verre de protection	Vidrio de protección	Protetto con vetro	Защитное стекло
	Tempered Glass	Temperiertes Glas	Getemperd beschermglas	Verre de protection température sur verre	Cristal atemperado	Vetro temperato	Закалённое стекло

NO MORE MISUNDERSTANDINGS

ICONS

ICON	ENGLISH	GERMAN	FLEMISH	FRENCH	SPANISH	ITALIAN	RUSSIAN
	Fixation Ceiling	Deckenmontage	Plafondbevestiging	Montage au plafond	Montaje en techo	Montaggio a soffitto	Потолочное крепление
	Fixation Wall	Wandmontage	Wandbevestiging	Montage au mur	Montaje en pared	Montaggio a parete	Настенное крепление
	Fixation Floor	Bodenmontage	Vloerbevestiging	Montage au sol	Montaje en suelo	Montaggio a pavimento	Напольное крепление
	Up/Down	Aufwärts/abwärts strahlend	Verlichting up of down	Éclairage haut ou bas	Emisión superior/ inferior	Luce monoemissione sopra/sotto	Освещение вверх или вниз
	Side	Seitlich abstrahlend	Verlichting lateraal	Éclairage laterale	Emisión lateral	Luce laterale	Освещение в сторону
	Up and Down	Direkt und indirekt abstrahlend	Verlichting up en down	Éclairage haut et bas	Emisión superior e inferior	Luce biemissione sopra/sotto	Освещение вверх и вниз
	Asymmetrical	Asymetrisch abstrahlend	Asymmetrisch	Asymétrique	Asimétrico	Asimmetrico	Асимметричный
	Surround	Allseitig abstrahlend	Sfeerverlichting	Éclairage multidirections	Emisión perimetral	Luce diffusa	Освещение вокруг
	Low Flicker	Minimales Flimmern	Lage flikker	Scintillement minimal	Nivel de flicker bajo	Basso sfarfallio	Низкий коэффициент мерцания
UGR≤19	Screen-compatible workplace light	Bildschirmtaugliche Arbeitsplatzleuchte	Werkplekverlichting is compatibel met beeldscherm	Éclairage compatible pour écran d'ordinateur	Iluminación para puestos de trabajo compatible con pantallas	Schermo-compatibile, luce per ambiente di lavoro	Освещение, подходящее для рабочего места с монитором
IC rated	IC rated: may be covered with insulation material	IC Rated: kann mit Isoliermaterial abgedeckt werden	IC classificatie: kan worden bedekt met isolatiemateriaal	Classé IC: peut être recouvert d'un matériau isolant	Clasificación IC: puede cubrirse con material aislante	Protezione IC. Puo´ essere coperto con materiale isolante	Степень защиты IC : может быть покрыт изолирующим материалом
	CE/VDE/ENEC Certificate	CE Zertifikat	CE Certificaat	Certificat CE	Certificado CE	Certificato CE	Сертификат CE
	Risk of injury (strangulation)	Verletzungsgefahr (Strangulierung)	Risico op verwonding	Risque de blessure	Riesgo de lesiones (estrangulación)	Rischio infortunio (strangolamento)	Травмоопасность (удушение)
Kelvin	Colour Temperature	Farbtemperatur	Kleurtemperatuur	Température de couleur	Temperatura de colour	Temperatura coloure	Цветовая температура
Blue lines	Not included part	Teil nicht inkludiert	Niet inbegrepen	Pièce non comprise	Parte no incluida	Articolo non incluso	В комплект не входит

HELLO, CAN YOU HEAR ME?

CONTACT

SHOWROOMS

WEVER & DUCRÉ GERMANY
Schanzenstraße 36, Geb. 234B
51063 Cologne
Germany
Phone +49 221 130 649 60
Fax +49 221 130 649 69
office.de@weverducre.com

WEVER & DUCRÉ ASIA PACIFIC
RM. 1413, Block A, Sea View Estate
2 Watson Road North Point
Hong Kong
Phone +852 211 069 24
Fax +852 310 640 96
office.hk@weverducre.com
office.cn@weverducre.com

WEVER & DUCRÉ FRANCE
10, Rue Pecquay
75004 Paris
France
Phone +33 1 402 981 01
office.fr@weverducre.com

WEVER & DUCRÉ LYON
36, Rue Juliette Récamier
69006 Lyon
France
Phone +33 4 72 811 199
office.fr@weverducre.com

WEVER & DUCRÉ SWEDEN
Hårdvallsgatan 18
115 46 Stockholm
Sweden
Phone +46 73 045 76 39
office.se@weverducre.com

WEVER & DUCRÉ ITALY
Via Monte Popera 4/2
30027 San Donà di Piave - Venezia
Italy
Phone +39 0421 177 83 88
office.it@weverducre.com

WEVER & DUCRÉ UK
23 Batemans Row
EC2A 3HH London
United Kingdom
Phone +44 203 174 01 77
info.uk@weverducre.com

WEVER & DUCRÉ POLAND
Diamond Business Park
Posag 7 Panien Street no 1
02-495 Warsaw
Poland
Phone +48 730 330 337
office.pl@weverducre.com

WEVER & DUCRÉ AUSTRIA
Gleisdorfer Gasse 15
8010 Graz
Austria
Phone +43 316 317 085 91
showroom.at@ weverducre.com

WEVER & DUCRÉ NETHERLANDS
info.nl@weverducre.com

WEVER & DUCRÉ RUSSIA
russia@weverducre.com

HEAD OFFICE + SHOWROOM

WEVER & DUCRÉ BV
Spinnerijstraat 99/21
8500 Kortrijk
Belgium
Phone +32 56 49 28 00
office@weverducre.com
weverducre.com

REPRESENTATIVE OFFICES

WEVER & DUCRÉ SWITZERLAND
Kellerstraße 22
6005 Lucerne
Switzerland
Phone +41 41 361 60 60
office.ch@weverducre.com

WEVER & DUCRÉ SPAIN
Plaça del Duc de Medinaceli, 5
08002 Barcelona
Spain
Phone +34 935 951 780
office.es@weverducre.com

WEVER & DUCRÉ FINLAND
Kaikukatu 4B
00530 Helsinki
Finland
Phone +358 400 700 975
office.fi@weverducre.com

WEVER & DUCRÉ NORWAY
Drammensveien 288
0283 Oslo
Norway
Phone +47 24 07 61 11
office.no@weverducre.com

WEVER & DUCRÉ MIDDLE EAST
Office No. 704, HDS Business Center
Cluster M
Jumeirah Lakes Towers, DMCC
PO Box 336603 Dubai
United Arab Emirates
Phone +971 4 436 23 47
office.me@weverducre.com

3rd edition, August 2021, ©Wever & Ducré® BV

All prices are non-binding recommended prices excluding VAT, lamps (bulbs) are not included. The prices and terms of payment stated in our order confirmation shall apply. To all prices and all extra expenses, we add the legally applicable value added taxes. Should our costs increase by the time of delivery, the prices can be recalculated on a pro rata basis. The prices stated shall apply net ex works. Information on availability as well as delivery terms and dates are provided as a point of reference only and are not binding. Prices are valid till the publication of a new price list. We expressively reserve the right to make changes in price, measurements and design. The details provided in this catalogue were correct at the time of publication. They do not constitute any kind of obligation on our part and are for information only. We shall not be held liable for any discrepancies between the illustrations or descriptions given and the actual product neither for any misprints and/or typing errors.
We reserve the right to make alterations or modifications to our products at any time. All mentioned RAL codes are indicative and approximative. We shall not be held liable for any discrepancies which may occur. All mentioned lumen values refer to white luminaires (in terms of finishing, covers or housings). Further lumen values on request. The general terms and conditions of Wever & Ducré BV shall apply to all purchases and orders. The applicable version of the general terms and conditions can be viewed at weverducre.com/en/downloads.

What's that? A whole new product range, and already several project references? See it this way: Inspiration is key to success in design, so what we care for most is inspiring you and showing you the potential of what we at Wever & Ducré do. Thus, we took the liberty of editing some (original) images to give you an impression of how our luminaires improve living, office, outdoor, and other spaces. These pictures are marked with an (V)

ThermoX® is a registered trademark of KAISER GmbH & Co KG (kaiser-elektro.de), a company independent of Wever & Ducré.

ARTWORK Egija Zirapa, Location Tallinn Street Quarter, Riga, Latvia
GRAPHIC DESIGN Ramona Gaar, Doris Tatschl, Valerie Thaller
PRINT PRODUCTION Ramona Gaar, René Zavadilik
ILLUSTRATION Doris Tatschl, Lukas Hochenwarter
TEXT Tanja Petschnig, Renate Buzzi
LITHOGRAPHY Volker Waldhauser
PROJECT MANAGEMENT Renate Buzzi, Sabrina Schrauf
PRINTING Medienfabrik, Graz, Austria
PHOTOGRAPHY - Apresvino - (p. 462-463, 486) | @nina struve for VRAI interior architecture (p. 96-97) | Aikon Producties bvba (p. 92) | Aleksandr Dal Cero (p. 264-265) | Alexander Maria Lohmann (p. 262) | Andrea Badrutt (p. 330) | Andreas Wimmer (p. 444) | Architekturfotografie Oliver Hallwirth (p. 438) | Art Sanchez (p. 596) | Beatrice Graalheim (p. 450) Bernd Steinbauer (p. 86) | B.C Gassner (p. 614) | Bruno Eggermont (p. 126, 154) | Carlo Ambrosi (p. 152) | Christian Brandstätter (p. 622) | Christian Repnik (p. 708) | Christoph Steinbauer (p. 380, 506, 594, 604, 660, 696) | Colornetwork® (p. 19) | Corinna Unterkofler/Joachim Grubelnik (p. 426, 656, 682) | Croce & Wir (p. 17, 712-713) | Dani Rovira Fotografia (p. 710) | David Aebi (p. 690) | Edgar Navarre (p. 538-540) | Elia Kuhn Photographe (p. 176, 534) | Erich Sinzinger (p. 182, 566, 702) | Erik Đuriš (p. 62-63) | Footoo Stijn De Graeve (p. 348, 352) | Fuzioncollective (p. 18) | Georges Leroux (p. 124) | Gerald van Rafelghem (p. 670) | Hanne Joosen Fotografie (p. 72, 284) | Harald Eisenberger (p. 116-117) | Ingo Rasp Photography (p. 504) | Jack Lovel (p. 526, 578) | Jaro van Meerten (p. 208) | Jean Marc Manson (p. 270) | Jennifer Mäckler (p. 48) | Jim Van Loo (p. 128) Jiří Dymáček (p. 648-649) | Joachim Grothus/Herford/Germany (p. 306) | KAPFHAMMER (p. 50) | Kim Forrsén (p. 198, 458, 636) | Kris Dekeijser (p. 11-12, 50, 56-59, 61, 66, 70, 73, 90, 94-95, 98, 102-104, 108-114, 120-122, 126, 131, 134-136, 142, 154, 166-168, 170, 172-174, 180, 184, 196, 200-206, 212-216, 220-221, 226-229, 234-236, 240-241, 244, 248, 250-252, 256, 260, 272-276, 280-282, 286, 290, 294, 300-301, 304, 310-314, 326, 336, 358, 378, 392-395, 398, 410, 424, 428-434, 440-442, 448, 452, 460, 464, 468-475, 492-494, 498, 502, 510-512, 532, 542, 548, 600-603, 606, 610, 630, 634, 640, 674-676, 684-688, 700) | Kris Dimitriadis/Kurt Dekeyzer studio PSG 2021 (p. 558) | Kurt Hoerbst (p. 508, 612-613) | Kurt Kuball (p. 130, 592, 626, 638, 672, 694) | Laura Bertone (p. 302, 328) | Lux Visual Storytellers (portrait pictures cover) | Marc Diez (p. 40) | Mark Hadden (p. 436) | Marco Richter Photography (p. 580-581) | Martin Baitinger (p. 106-107) | Martin Steinthaler (p. 620) | Mattia Aquila (p. 278) | Miriam Raneburger (p. 616) nunofoto.com (p. 632) | Patricia Goijens (p. 38) | Paul Karalius (p. 644, 698) | paul ott photografiert (p. 646, 652, 664) | Paula Beetlestone (p. 650) | Peter Holgersson AB (p. 658) Philip Kottlorz Fotografie (p. 34-36, 46, 382) | Robert Aboltins Photography (COVER, p. 15) | Rory Gardiner (p. 662) | Salvatore Guido (p. 28-32, 42-45, 60, 64, 68, 74-82, 118, 144-151, 156-164, 188, 218, 222-224, 242, 254, 288, 296-297, 316-324, 334, 350-351, 354-356, 360-364, 368-375, 396, 408, 418-421, 446, 454-455, 482-484, 518-524, 550-557, 560-565, 567-572, 576, 582-586) | SCHWARZ – LICHT / fotografie + kommunikation (p. 390, 405, 456) | Selma Hengeveld (p. 100) | Saurbron Fotografie (p. 476) | Sergey Bezuglov (p. 210, 308) | Shutterstock (p. 9) | Fabio Mantovani (p. 54) | Søren Kristensen (p. 238) | stella (p. 8, 10, 14, 20-21) | Studio Erick Saillet (p. 186) | Victor Sajara Photography (p. 704) | Walters Media (p. 528-531) | Wide Shot Photography – Alexandre Van Battel (p. 132) | Whispering Bold Interior Design (p. 84) | www.foto-stoebich.com (p. 332) | Zvonimir Mihaljek (p. 628)

THIS IS NOT THE END

PAY A VISIT TO **WEVERDUCRE.COM**